
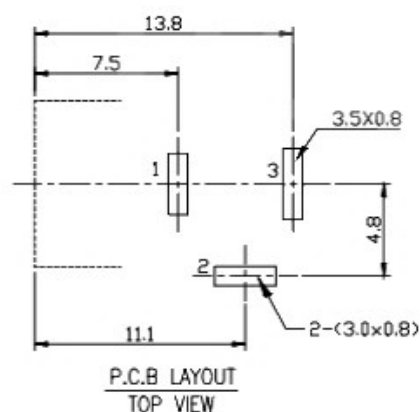
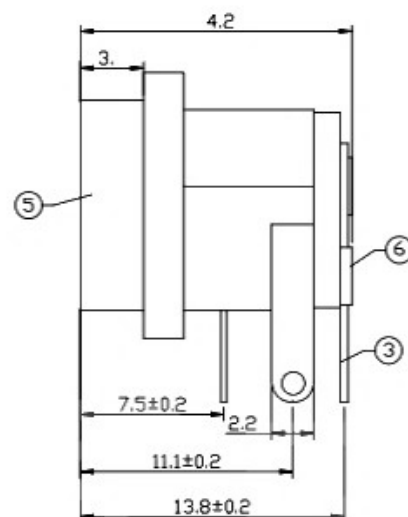


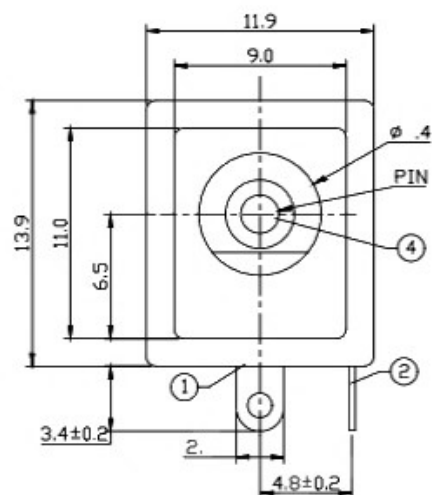


PIN	φ2.0	φ2.35	φ2.5
APPD.			

主要技术性能

1. 额定电负荷 : DC 30V 0.5A;
2. 接 触 电 阻: $\leq 0.03 \Omega$;
3. 绝 缘 电 阻: $\geq 100M\Omega$;
4. 耐 压: AC500V(50Hz)min;
5. 插 拔 力: 3-15N;
6. 寿 命: 5,000次。

SCHEMATIC



6	COVRE	1	PBT	
5	HOUSING	1	PBT	
4	PIN	1	BRASS	Ni-P1ating
3	FLAT PIECE	1	BRASS	Sn-P1ating
2	CURVE PIECE	1	BRASS	Sn-P1ating
1	SPRING	1	BRONZE	Sn-P1ating
NO.	DESCRIPTION	QTY	MATERIL	PLATING

DONG GUAN XI BANG ELECTRONIC CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	DC POWER JACK	DRAWING	G.C.Chen	DG.No.	
PART NO.		CHECK	G.C.Chen	REV.	A
UNIT : mm	TOLERANCE OTHERWISE	UP TO 5 ABOVE 5 ~ 30 ABOVE 30 ANGLE	±0.2 ±0.3 ±0.5 ±.7	ANGLE 0°±3'	APPROVAL
		SCALE	2:1	DATE	PAGE
					1 OF 1