



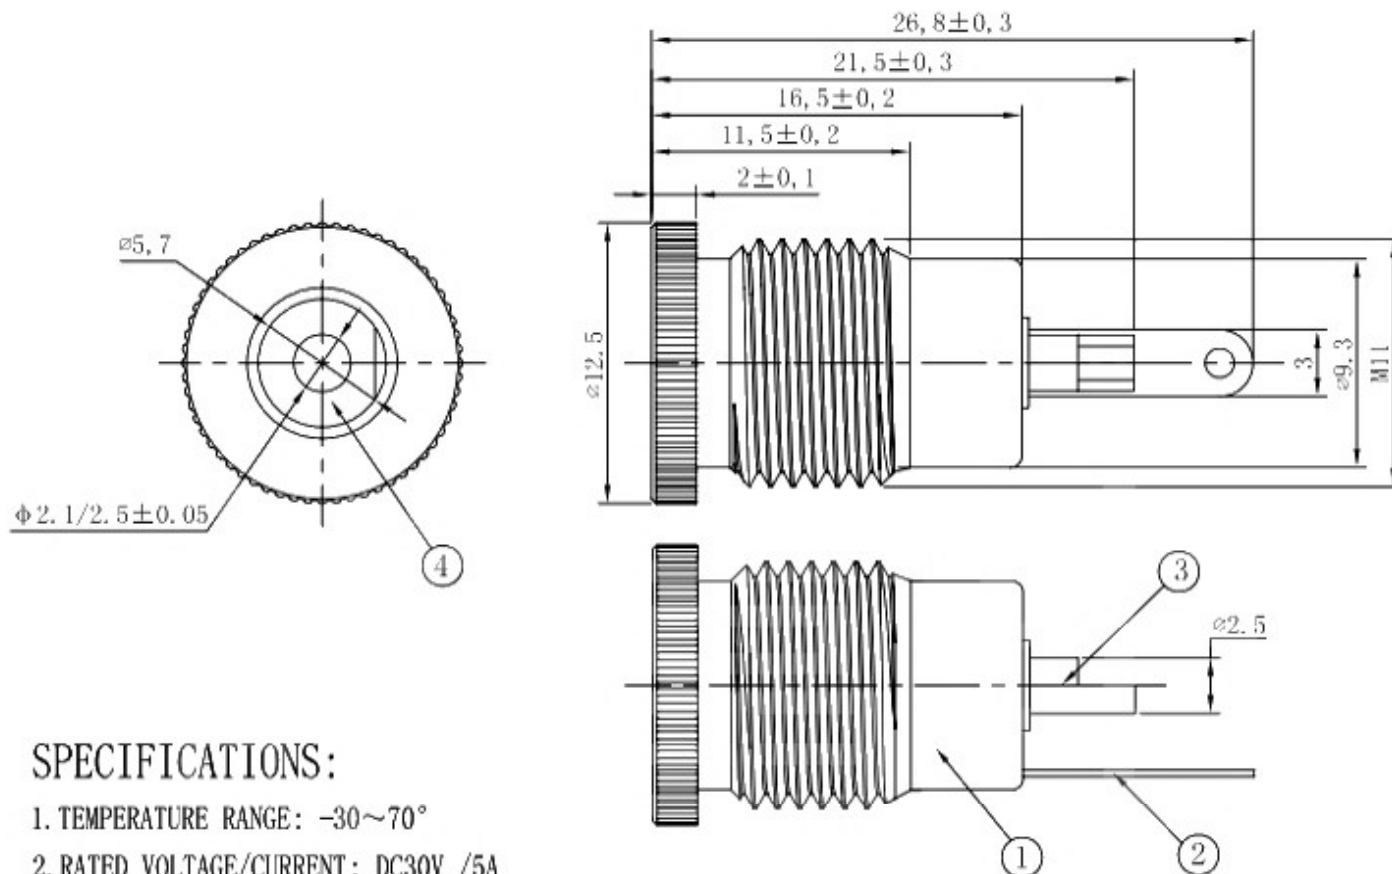

SPECIFICATIONS:

1. TEMPERATURE RANGE: $-30\sim 70^{\circ}$
2. RATED VOLTAGE/CURRENT: DC30V /5A
3. CONTACT RESISTANCE: $\leq 0.03\Omega$
4. INSULATION RESISTANCE: $\geq 100M\Omega$ DC250V
5. WITHSTANDING VOLTAGE: AC500V(50Hz)/min
6. INSERTION FORCE: 3~20N
7. DURABILITY CYCLES: 5000CYCLES

ELECTRICAL CIRCUIT



4	INSULATION	1	PA66	BLACK
3	PIN	1	BRASS	D. CuSn
2	TERMINAL	1	PHOSPHOROUS BRONZE T=0.35	D. CuSn
1	BODY	1	COPPER ALLOY	D. CuSn
NO.	DESCRIPTION	QTY	MATERIAL	FINISH

DONG GUAN XI BANG ELECTRONIC CO., LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME

DC POWER JACK

DRAWING

Y,C,ZHANG

DWG.No.

SBICL

PART NO.

CHECK

G.C.Chen

REV.

A1

UNIT :
mmTOLERANCE
OTHERWISEUP TO 5
ABOVE 5~30
ABOVE 30
ANGLE±0.2
±0.3
±0.5
±.5

ANGLE

APPROVAL

SCALE

2:1

DATE

PAGE

1 OF 1