

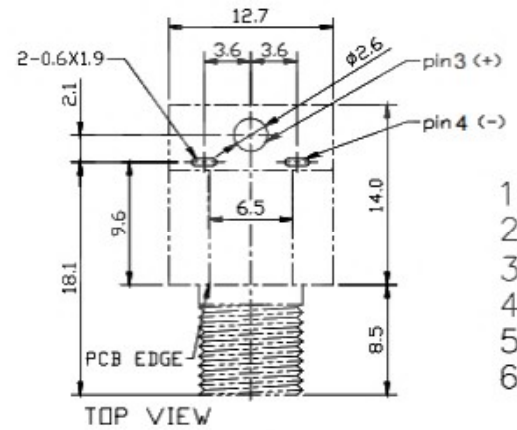
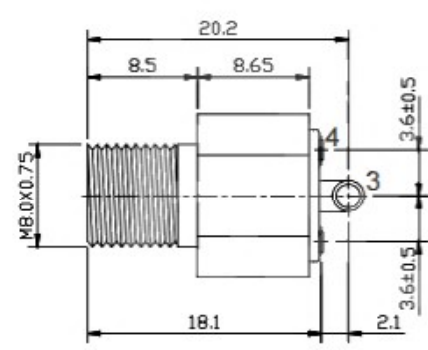
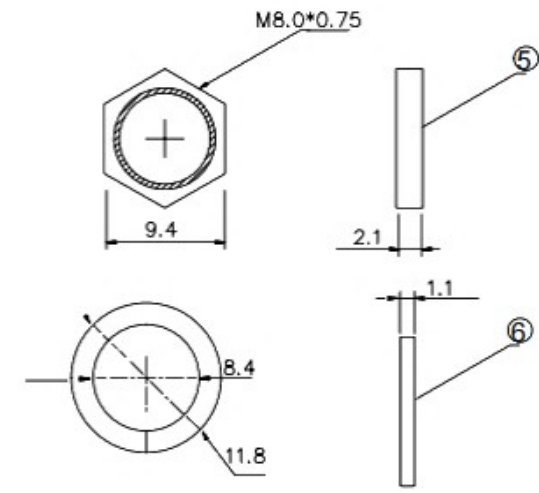
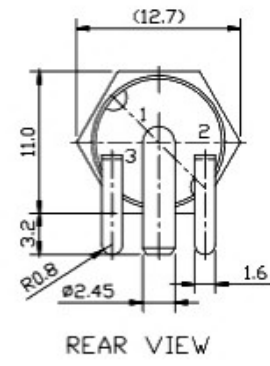


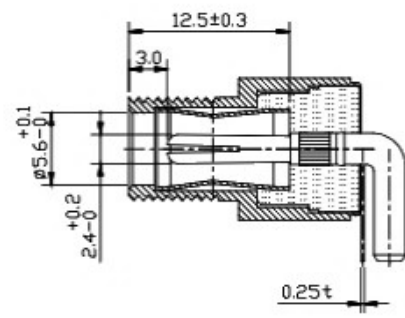

PCB LAYOUT



SPECIFICATION

1. Rating : DC 20V 15A;
2. Contact resistance: $\leq 30\text{m}\Omega$;
3. Insulation resistance: $\geq 100\text{M}\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

⑥	Washer	1	Spring steel	Sn-Plating
⑤	Nut	1	H59 BRASS	Ag-Plating
④	Tip spring	1	Bronze C5191 t=0.2	Ag-Plating
③	PIN	1	H59 BRASS	Ag-Plating
②	Housing	1	PBT	Black
①	Bushing	1	H59 BRASS	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

DONG GUAN XI BANG ELECTRONIC CO., LTD

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME	DC POWER JACK			DRAWING	G.C.Chen	DWG.No.	
PART NO.				CHECK	G.C.Chen	REV.	A
UNIT :	TOLERANCE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE	
mm	OTHERWISE	ABOVE 5~30	±0.3	0°±3'	SCALE	PAGE	1 OF 1
		ABOVE 30	±0.5				
		ANGLE	±3'				