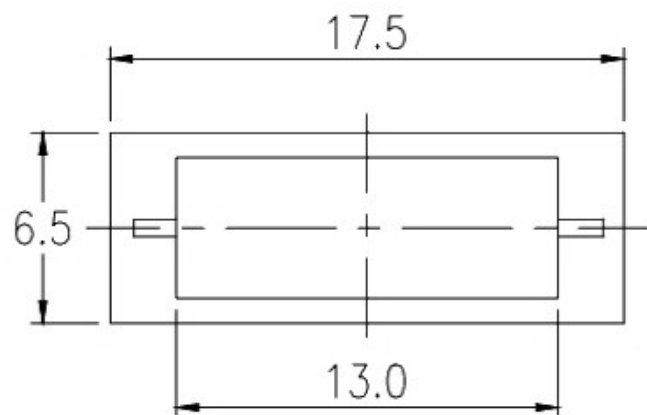


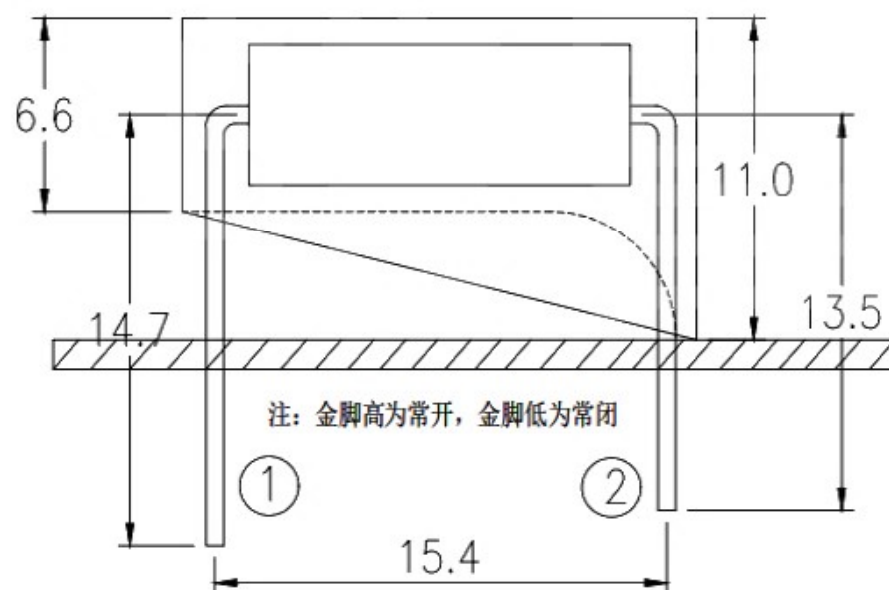


CIRCUIT

P.C.B LAYOUT
TOP VIEW

注: 金脚高为常开, 金脚低为常闭

电气特性: Electrical:

1. 额定电流: 0.2A
2. 额定电压: 12V
3. 导通时间: 约2ms
4. 开路电阻: $>10M\ \Omega$
5. 耐温: $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$
6. 闭路电阻: $<2\ \Omega$
7. 端子拉力: 500gf/min
8. 湿度: 95RH 40°C , 96H
9. 操作寿命: 80,000周期以上

DONG GUAN XI BANG ELECTRONIC CO., LTD

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		CONNECTOR				DRAWING	Y.C,ZHANG	DWG.No.	SBICL
PART NO.						CHECK	G.C.Chen	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5 ABOVE 5 ~ 30 ABOVE 30 ANGLE	± 0.2 ± 0.3 ± 0.5 $\pm 3^{\circ}$	APPROVAL	DATE			
	mm					SCALE	2:1	PAGE	1 OF 1