

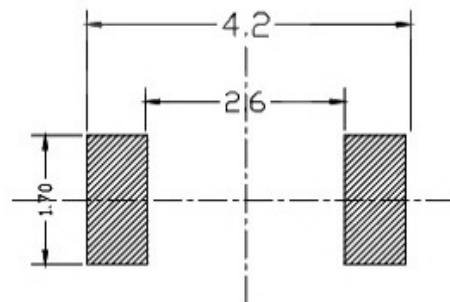
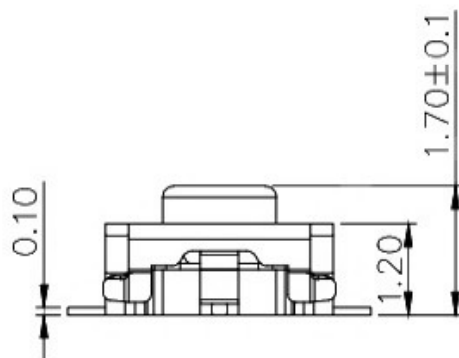

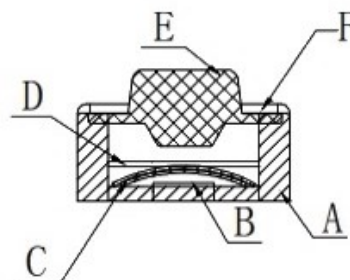



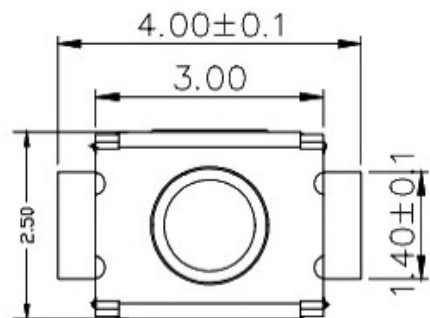

原理图



主要技术规格:

1. 额定值: 50mA DC12V
2. 接触电阻: 50mΩ
3. 操作力: 160gf±50gf
4. 行程: 0.13±0.05mm
5. 绝缘电阻: 100MΩ
6. 抗电强度: 250V 50HZ 1Min.
7. 寿命: 1万Cycles

材料:

- A底座: LCP4009 (白色)
B卡件: C5191磷铜 (镀银)
C簧片: 不锈钢 (镀银)
D内薄膜: 进口聚酰亚胺 (灰色)
E桃心: PA46无卤 (灰色)
F盖板: 不锈钢301 (清洗)

DONG GUAN XI BANG ELECTRONIC CO., LTD

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		SWITCH			DRAWING	Y.C,ZHANG	DWG.No.	SBICL
PART NO.					CHECK	G.C.Chen	REV.	A1
	UNIT : mm	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE	
			ABOVE 5~30	±0.3				
	mm	OTHERWISE	ABOVE 30	±0.5	0°±3°	SCALE	PAGE	1 OF 1
			ANGLE	±3°				