
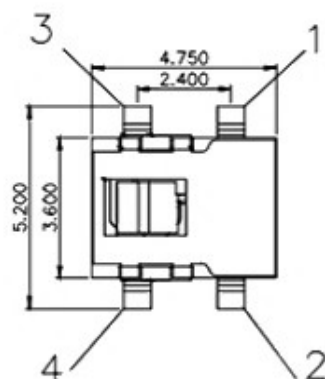


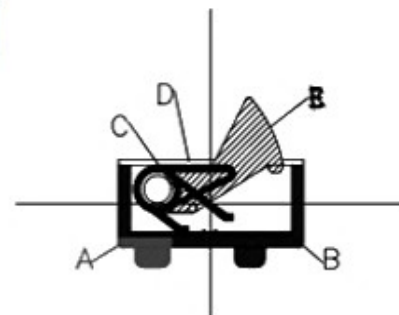


电气原理图

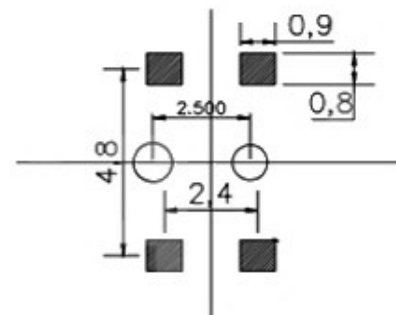

材料:

A底座/基座: 进口LCP(黑色)

B嵌件: 进口磷青铜(镀银与银白色)

C接触弹簧: 进口磷黄铜(镀银与银白色)

D盖板: 不锈钢301(清洗)

E按钮: 进口增强尼龙(黑色)

主要技术规格:

1. 额定值: 50mA DC12V

2. 接触电阻: $\leq 150m\Omega$ 3. 操作力: $30gf \pm 20gf$ 4. 行程: $0.4 \pm 0.2mm$ 5. 绝缘电阻: $\geq 100M\Omega$

6. 耐压强度: AC250V 50Hz/1Min.

7. 寿命: 10万Cycles Min

8. 温度范围: $-30^{\circ}C$ TO $+80^{\circ}C$

DONG GUAN XI BANG ELECTRONIC CO., LTD

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME	DETECTION SWITCH			DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.				CHECK	G.C.Chen	REV.	A1
UNIT : mm	TOLERANCE	UP TO 5 ABOVE 5 ~ 30	± 0.2 ± 0.3	ANGLE	APPROVAL	DATE	
	OTHERWISE	ABOVE 30 ANGLE	± 0.5 ± 1	$0^{\circ} \pm 3'$	SCALE	PAGE	1 OF 1

2:1