

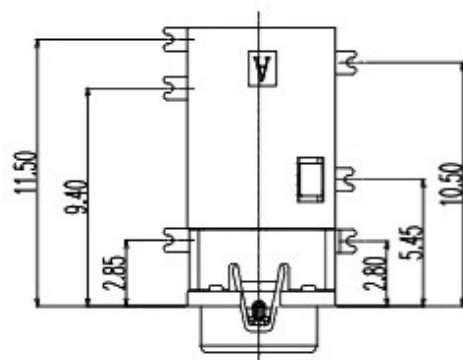
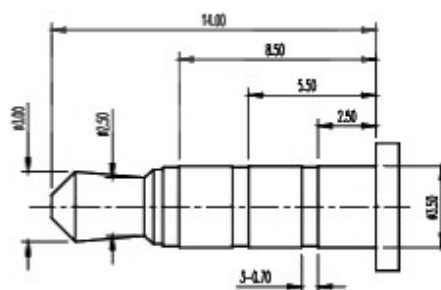
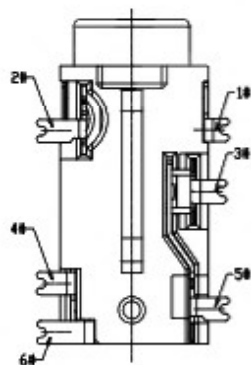
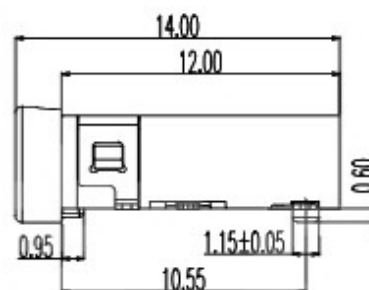



3D VIEW

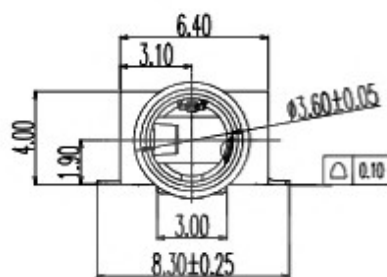

(#3.50mm 4 POLE PLUG DETAIL DRAWING)



SCHEMATIC

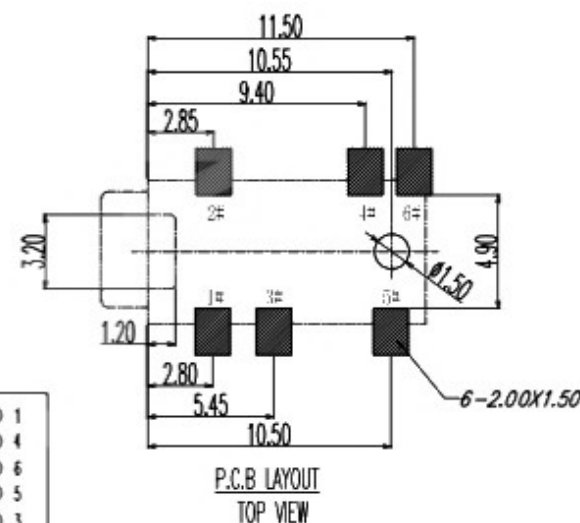P.C.B LAYOUT
TOP VIEW

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 1000Ω MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;

7	TERMINAL 6#	1	
6	TERMINAL 5#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL, GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA
5	TERMINAL 4#	1	
4	TERMINAL 3#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL, GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA
3	TERMINAL 2#	1	
2	TERMINAL 1#	1	PHOSPHOR BRONZE; THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.
1	HOUSING	1	PART COLOR BLACK
ITEM	NAME	QTY	DESCRIPTION
			NOTE



东莞市溪榜电子有限公司

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME	PHONE JACK	DRAWING	Y.C,ZHANG	DWG.No.	SBICL
PART NO.	PJ-3160-ER	CHECK	G.C.Chen	REV.	A1
UNIT : mm	TOLERANCE OTHERWISE	APPROVAL	DATE	PAGE	1 OF 1
	UP TO 5 ABOVE 5 ~30 ABOVE 30 ANGLE	SCALE	2:1		
	±0.2 ±0.3 ±0.5 ±.3	ANGLE 0°±3°			