

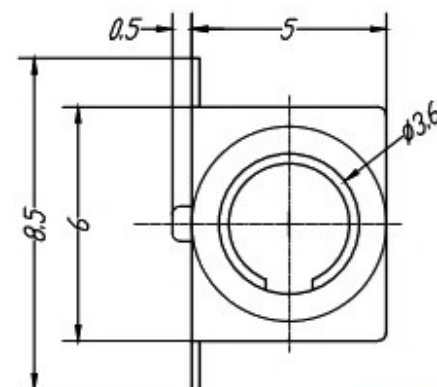


额定电负荷 DC 30V\1A
接触电阻 $\leq 0.03 \Omega$
绝缘电阻 $\geq 100M \Omega$
耐 压 AC500V (50Hz) min
插 拔 力 5-25N
耐 温 $-20 \sim 70^{\circ}C$
使用寿命 ≥ 5000 次

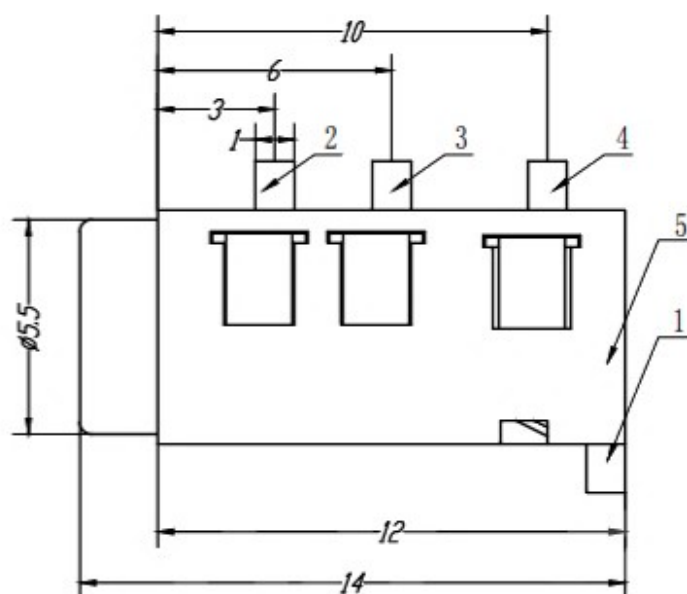

5	EJ-3534-05	基 座	1	LCP		
4	EJ-3534-04	4号插片	1	Qsn6.5-0.1	0.2	Ag
3	EJ-3534-03	3号插片	1	Qsn6.5-0.1	0.2	
2	EJ-3534-02	2号插片	1	Qsn6.5-0.1	0.2	
1	EJ-3534-01	1号插片	1	Qsn6.5-0.1	0.2	
序号	产 品 编 号	产 品 名 称	数 量	材 料	规 格	电 镀

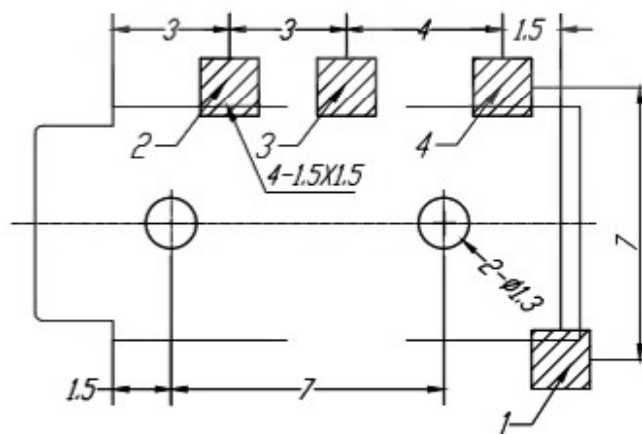

东莞市溪榜电子有限公司

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		PHONE JACK		DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.		PJ-320DS		CHECK	G.C.Chen	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	ANGLE	APPROVAL	DATE	PAGE
	mm		ABOVE 5 ~ 30				
			± 0.2		SCALE	2:1	1 OF 1
			± 0.3				
			± 0.5		SCALE	2:1	1 OF 1
			± 3				