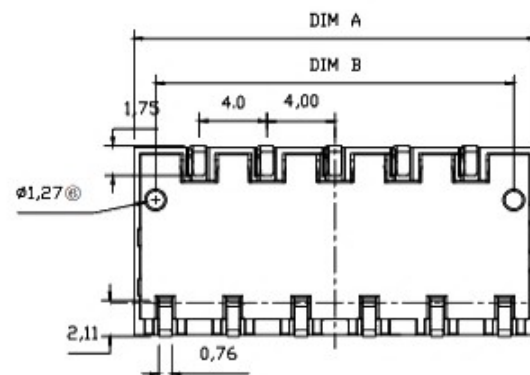

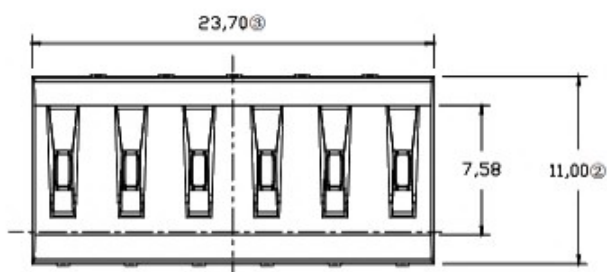


性能:

额定电流: 3A

额定电压: 30V

耐电压: 500V

接触电阻: 30mΩ

绝缘电阻: 500MΩ

工作温度: -55℃~+125℃

塑件(材质): PA9T

接触点(材质): 磷铜, 镀金5U

Pin数	PART NO.	DIM A	DIM B
2P	BC2P40H80-5U	7.7	5.11
3P	BC3P40H80-5U	11.7	9.11
4P	BC4P40H80-5U	15.7	13.11
5P	BC5P40H80-5U	19.7	17.11
6P	BC6P40H80-5U	23.7	21.11



东莞市溪榜电子有限公司

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		CONNECTOR			DRAWING	Y.C,ZHANG	DWG.No.	SBICL	
PART NO.					CHECK	G.C.Chen	REV.	A1	
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE	26-11-2013	
	mm		ABOVE 5 ~30	±0.3					ABOVE 30