
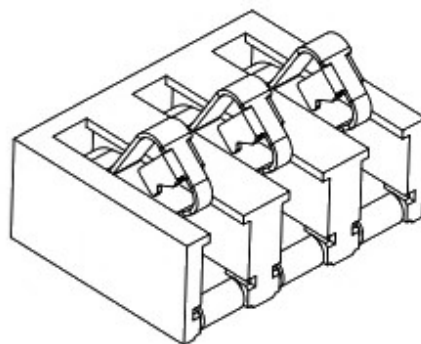




性能:

额定电流: 5.0A

额定电压: 30V

耐电压: 500V

接触电阻: 50mΩ Max





绝缘电阻: 500MΩ Min

工作温度: -40℃~+85℃

塑件(材质): LCP

接触点(材质): 磷铜, 触点镀金3U",

使用寿命: 5000次以上

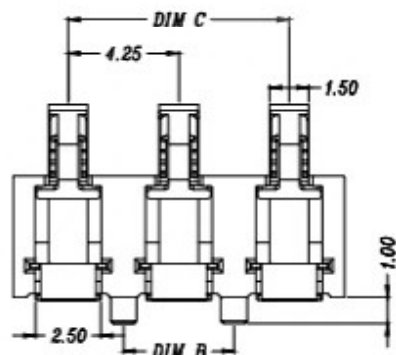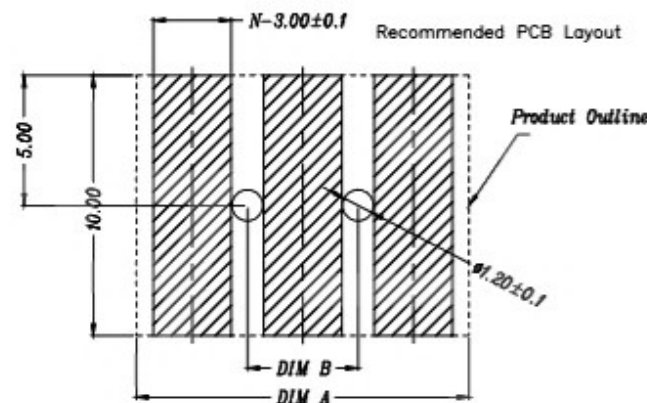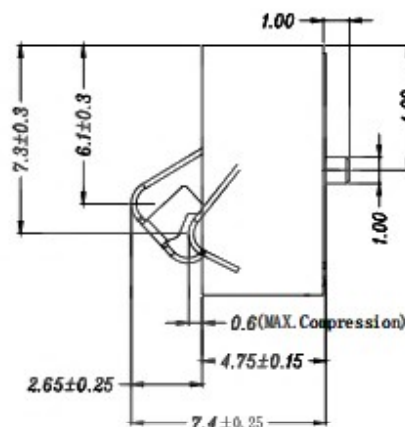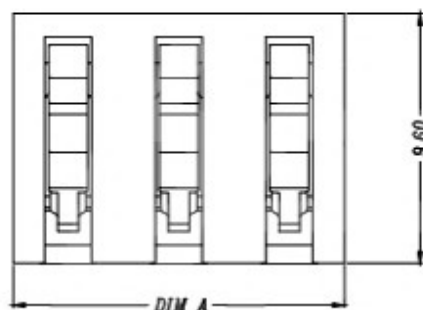

Pin数(N)	PART NO.	DIM A	DIM B	DIM C
3Pin	BC3P425H74	12.75	4.25	8.5
4Pin	BC4P425H74	17.0	8.5	12.75
5Pin	BC5P425H74	21.25	12.75	17.0
6Pin	BC6P425H74	25.5	17.0	21.25



东莞市溪榜电子有限公司

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		CONNECTOR		DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.				CHECK	G.C.Chen	REV.	A1
	UNIT :	TOLERANCE	UP TO 5	±0.2	APPROVAL	DATE	02-03-2015
	mm	OTHERWISE	ABOVE 5 ~ 30	±0.3		PAGE	1 OF 1
			ABOVE 30	±0.5	SCALE	2:1	
			ANGLE	±3°			