

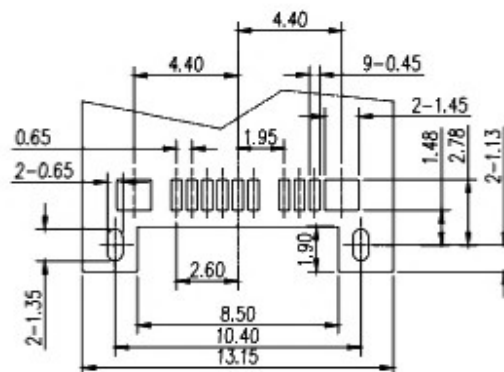
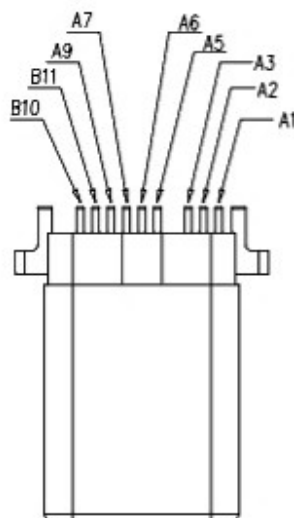
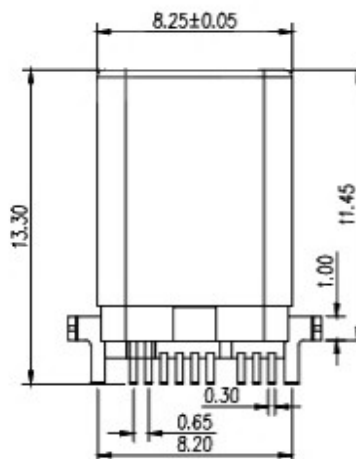
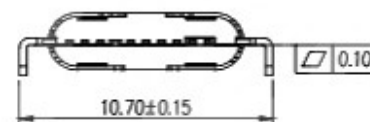


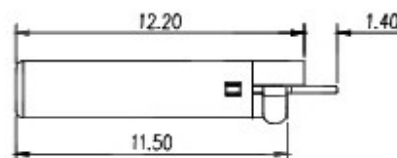

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

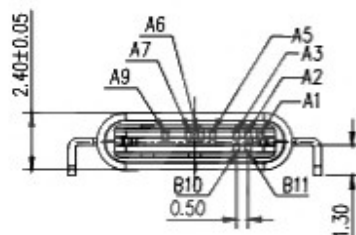

Specification:

1. Electrical Characteristics:
Contact Current Rating: 3 Amperes Max.
Rated Voltage: 30V Max.
Dielectric Withstanding Voltage: AC 100V r.m.s.
Insulation Resistance: 100 M Ω Minimum.
Contact Resistance: 40 m Ω Maximum.
2. Environmental:
Operating Temperature: $-30^{\circ}\text{C} \sim +85^{\circ}\text{C}$.
3. Mechanical Characteristics:
Insertion Force: 5~20Nf.
Withdrawal Force: 8~20Nf.
Durability Cycles: 10000 Cycles.

5	EMC SPRING	Stainless Steel; T=0.10mm;
4	CONTACT	Copper Alloy; Au1u"
3	LATCH	Stainless Steel; T=0.3mm;
2	HOUSING	LCP Thermoplastic; UL94V-0;
1	SHELL	Stainless Steel; T=0.15mm;
NO.	NAME	DESCRIPTION

A12	A11	A10	A9	A8	A7	A6	A5		A3	A2	A1
			VBUS		D-	D+	CC		TX1-	TX1+	GND
									RX1-	RX1+	
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12



东莞市溪榜电子有限公司

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		CONNECTOR			DRAWING	Y.C.ZHANG	DWG.No.	SBICL
PART NO.		TYPE C 9P 单排SMT 拉伸款			CHECK	G.C.Chen	REV.	A1
	UNIT :	TOLERANCE	UP TO 5	±0.2	APPROVAL		DATE	
	mm	OTHERWISE	ABOVE 5 30	±0.3				
				ABOVE 30	±0.5	0°±5°		
				ANGLE	±5°	SCALE	2:1	PAGE