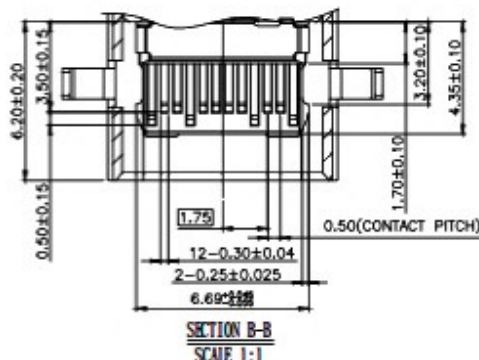
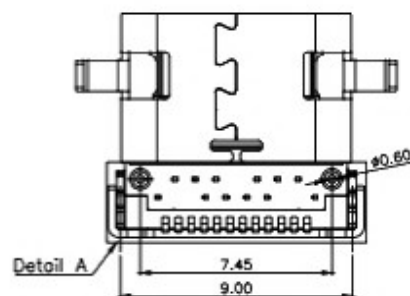
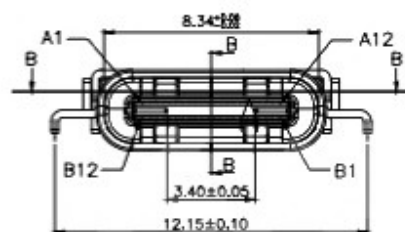
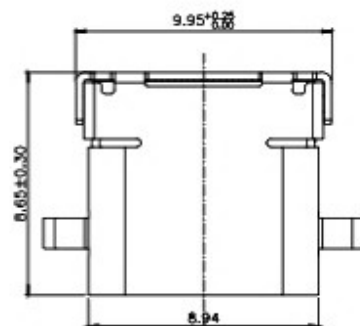


备注:

1.材质:

1.1胶芯: LCP+30%G.F UL94V-0

1.2端子: COPPER ALLOY; 镍底, 镀金Xμ"

1.3外壳: SUS304; 表面镀镍100μ"
或亮锡100μ"

1.3护板: SUS304;

2.主要特性:

2.1额定电流: 5.0A (5A MIN FOR VBUS;
0.25A MIN FOR OTHER.)

2.2接触阻抗: 40mΩ MAX

2.3绝缘阻抗: 100MΩ MIN 100V DC

2.4耐压测试: 100V AC

2.5沾锡性: 温度250±5℃, 时间5±0.5s

2.6整体插入力: 0.50~2.00kgf MAX

整体拔出力: 0.80~2.00kgf MIN

2.7使用寿命: 10000次

2.8工作温度: -55℃~+85℃

产品料号:

USCX-24FX-XXMX-34

1-G.P
2-RoHS
3-REACH
4-HF/无卤1-卷带包装
2-PVC盒B-半金雾锡 1u"
D-半金雾锡 5u"
F-半金雾锡 15u"
H-半金雾锡 30u"N-可焊接
S-雾锡
T-亮锡
A-全K-黑色
N-本色

东莞市溪榜电子有限公司

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		CONNECTOR			DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.		USB 3.1 C TYPE 沉板 DIP+SMT成品矩形 6.65L四脚插板			CHECK	G.C.Chen	REV.	A1
UNIT : mm	TOLERANCE OTHERWISE	UP TO 5 ABOVE 5 ~ 30 ABOVE 30 ANGLE	±0.2 ±0.3 ±0.5 ±.5	ANGLE 0°±5°	APPROVAL		DATE	
					SCALE	2:1	PAGE	1 OF 1