

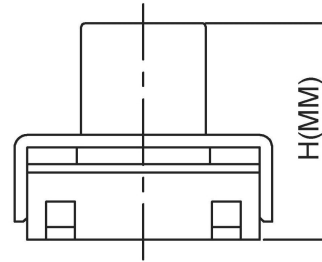
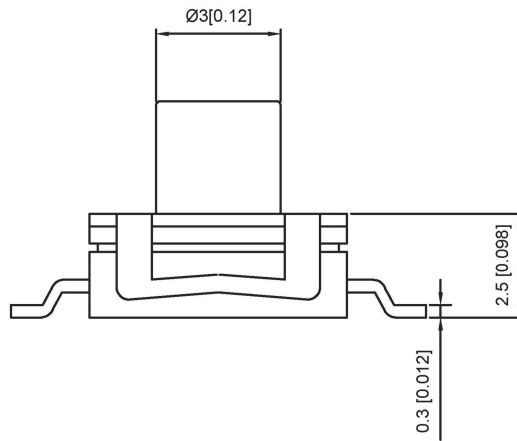


IP65

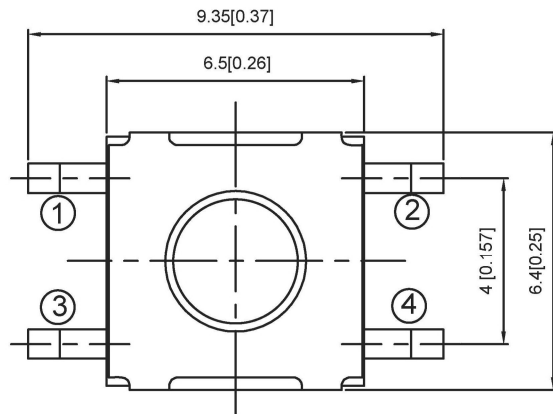

PCB Mounting
pattern Dimension

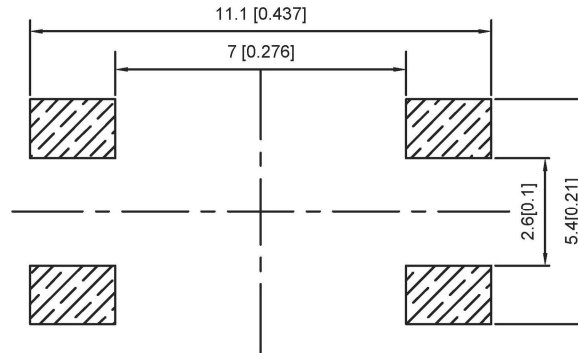


SPECIFICATION

Contact Rating:	50mA,12V DC
Contact Resistance:	100mΩ max
Insulation Resistance:	100mΩ min.500V DC
Dielectric Strength:	250V AC/1minute
Travel:	0.25mm
Operating Temp:	-30℃~+85℃
Storage Temp:	-30℃~+80℃

PAPT NO	TS-1158B-X-X-X
Operating Force	B:160gf C:260gf E:400gf
Height	H: A:3.1 B:3.5 C:4.3 D:5.0
Color	BL:blue W:white

Circuit Diagram



⑤	Terminal	—	4	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	PA46		—
②	Cover	—	1	SPSS	Plating Nickel	—
①	Keystake	—	1	Silica gel		—
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

						DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH			
					units: mm	DWN		DATE		VIEW:	PART NO.:			
Δx					tolerance:	CHKD		DATE		UNIT: mm/in	DWG NO			
Δx					X.X ±0.2mm						TS-1158B-X-X-X			
Δx					X.XX ±0.1mm	APPD		DATE		SIZE: A4				
MARK	DESCRIPTION			DATE	REVISED	APPROVED								
REVISIONS						UNSPECIFIED TOLERANCES								
www.alpsr.com www.gdxdz.com www.xbswitch.com						DONG GUAN XI BANG ELECTRONIC CO., LTD						WEIGHT	SHEET	REVISION
												1.0g	1/1	A0