
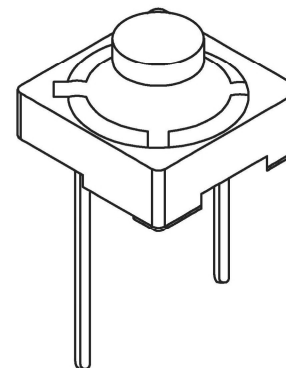


Recommended P.C.B layout

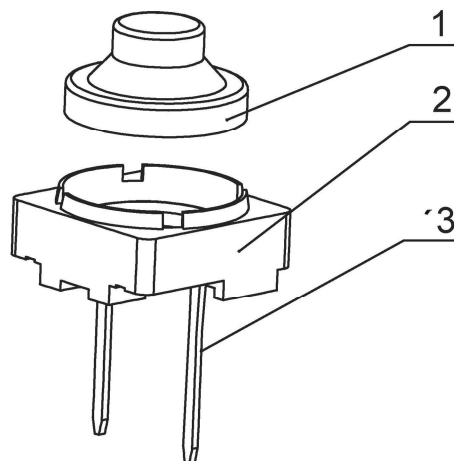

Contact Rating:	50mA, 12V DC
Contact Resistance:	100mΩ max
Insulation Resistance:	100MΩ min.500V DC
Dielectric Strength:	250V AC/1minute
Travel:	1.2mm
Operating Temp:	-30℃ ~+85℃
Storage Temp:	-30℃ ~+80℃

PAPT NO	TC-1117D-X
Operating Force	A:120gf B:160gf C:260gf
Height	H:5.0

		---				---
		---				---
③	Terminal	---	2	Brass (0.30t)	Plating silvering	---
②	Base	---	1	Pa46		---
①	Keystake	---	1	Silica gel		---
ITEM	PAPT NAME	TER.NO	QTY	MATERIAL	FINISHING	REMARK

					units:	mm
Δ X					tolerance:	
Δ X					X.X	±0.2mm
Δ X					X.XX	±0.1mm
MARK	DESCRIPTION	DATE	REVISED	APPROVED	X.XXX	±0.05mm
REVISIONS						UNSPECIFIED TOLERANCES
www.alpsr.com www.gdxdz.com www.xbswitch.com						

DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH		
DWN		DATE		VIEW: 			
CHKD		DATE		UNIT: mm/in	PART NO.:		
APPD		DATE		SIZE: A4	DWG NO TC-1117D-X		
DONG GUAN XI BANG ELECTRONIC CO., LTD					WEIGHT	SHEET	REVISION
					1.0g	1/1	A0