

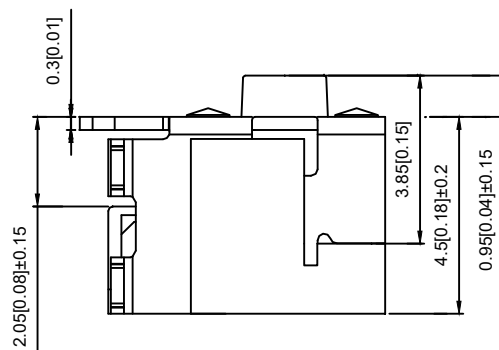
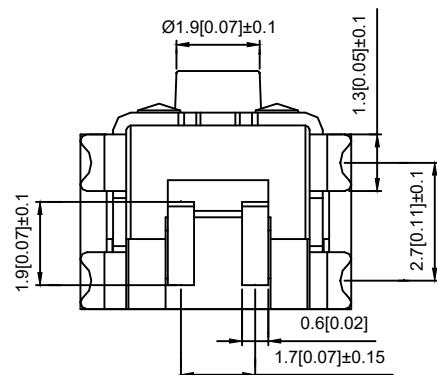


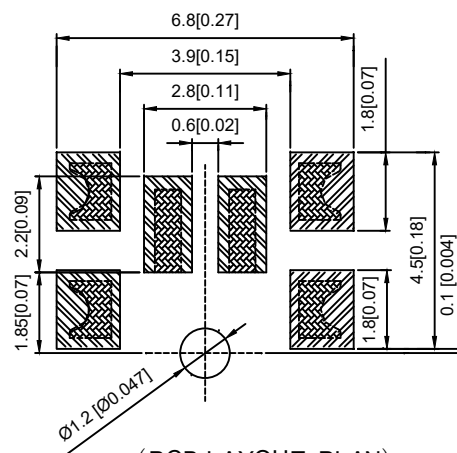

SPECIFICATION

Contact Rating:	50mA,12V DC
Contact Resistance:	100mΩ max
Insulation Resistance:	100mΩ min.500V DC
Dielectric Strength:	250V AC/1minute
Travel:	0.25mm
Operating Temp:	-30℃~+85℃
Storage Temp:	-30℃~+80℃

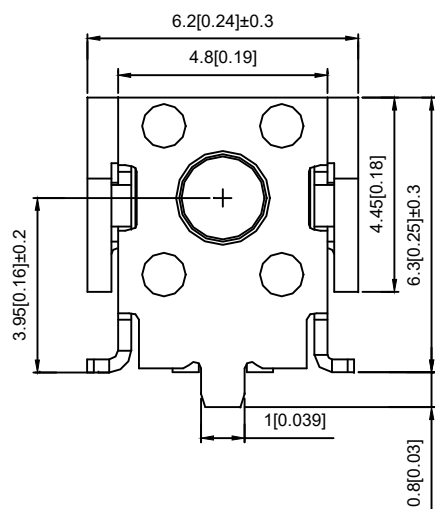

(PCB LAYOUT PLAN)



(CIRCUIT DIAGRAM)

PAPT NO	TS-1109TP-X
Operating Force	A:100gf B:160gf C:260gf
Height	H:3.85

⑤	Terminal	—	2	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Pa46		—
②	Cover	—	1	Spcc	Plating Nickel	—
①	Keystake	—	1	Pa46		—
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

						DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH		
					units: mm	DWN		DATE		VIEW: 	PART NO.:		
Δx					tolerance: X.X ±0.2mm	CHKD		DATE		UNIT: mm/in	DWG NO.:		
Δx					X.XX ±0.1mm	APPD		DATE		SIZE: A4	TS-1109TP-X		
Δx					X.XXX ±0.05mm						WEIGHT	SHEET	REVISION
MARK	DESCRIPTION		DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES					1.0g	1/1	A0
REVISIONS						DONG GUAN XI BANG ELECTRONIC CO., LTD							
www.alpsr.com www.gdxdz.com www.xbswitch.com													