

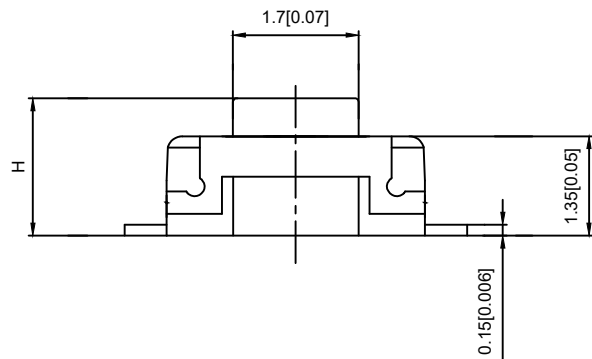

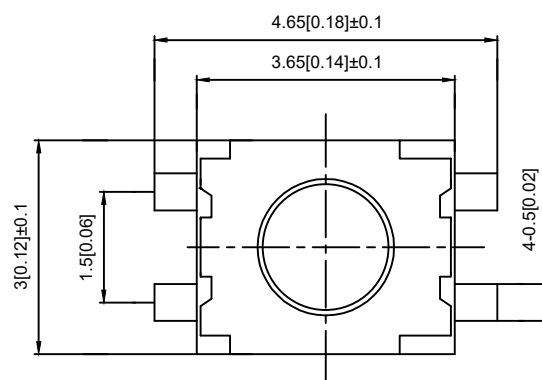


SPECIFICATION

Contact Rating:	50mA,12V DC
Contact Resistance:	100mΩ max
Insulation Resistance:	100mΩ min.500V DC
Dielectric Strength:	250V AC/1minute
Travel:	0.13mm
Operating Temp:	-30℃~+85℃
Storage Temp:	-30℃~+80℃



PAPT NO	TS-1185EC-X-X-X
Operating Force	A:100gf B:160gf C:260gf
Height	H:A:1.8 B:1.85 C:1.92 D:2.0 E:2.5
Fixed column	B:black W:white

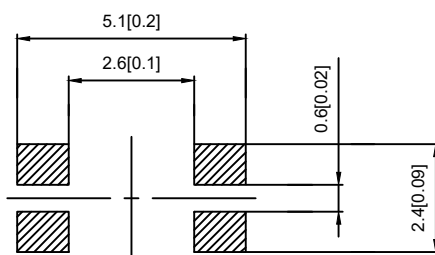

⑤	Terminal	—	2	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Lcp		—
②	Cover	—	1	Brass	Plating Nickel	—
①	Keystake	—	1	Lcp		—
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

DSND		DATE		SCALE: N/A	MODEL TYPE:
DWN		DATE		VIEW:	TACT SWITCH
CHKD		DATE		UNIT: mm/in	PART NO.:
APPD		DATE		SIZE: A4	DWG NO.:
DONG GUAN XI BANG ELECTRONIC CO., LTD					TS-1185EC-X-X-X
WEIGHT		SHEET		REVISION	
1.0g		1/1		A0	

Δx					units: mm
Δx					tolerance: X.X ±0.2mm
Δx					X.XX ±0.1mm
MARK					X.XXX ±0.05mm
REVISIONS					UNSPECIFIED TOLERANCES
www.alpsr.com www.gdxjdz.com www.xbswitch.com					