

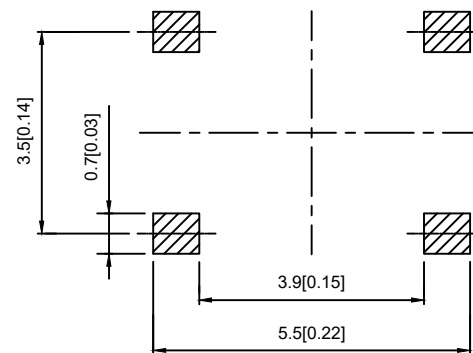
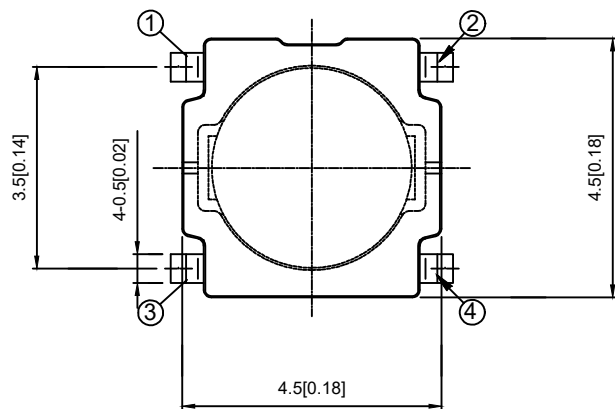




PCB LAYOUT(X0.5)

SPECIFICATION

Contact Rating:	50mA,12V DC
Contact Resistance:	100mΩ max
Insulation Resistance:	100mΩ min.500V DC
Dielectric Strength:	250V AC/1minute
Travel:	0.20mm
Operating Temp:	-30℃~+85℃
Storage Temp:	-30℃~+80℃

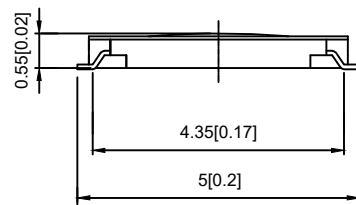

CIRCUIT DIAGRAM

PAPT NO	TS-1824SR-X
Operating Force	B:160gf C:260gf
Height	H:0.55

⑤	Terminal	—	4	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Lcp		—
②	Cover	—	1	kapton filmPI	Plating Nickel	—
①	Keystake	—	1			—
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

						DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH		
					units: mm	DWN		DATE		VIEW: 	PART NO.:		
Δx					tolerance: X.X	CHKD		DATE		UNIT: mm/in	DWG NO.: TS-1824SR-X		
Δx					X.XX ±0.2mm								
Δx					X.XX ±0.1mm	APPD		DATE		SIZE: A4	WEIGHT 1.0g		
MARK	DESCRIPTION			DATE	REVISED								APPROVED
REVISIONS						UNSPECIFIED TOLERANCES						REVISION A0	
www.alnsrc.com www.qdxidrz.com www.xbswitch.com						DONG GUAN XI BANG ELECTRONIC CO., LTD							

Δx					units: mm
Δx					tolerance: X.X ±0.2mm
Δx					X.XX ±0.1mm
MARK	DESCRIPTION	DATE	REVISED	APPROVED	X.XXX ±0.05mm
REVISIONS					UNSPECIFIED TOLERANCES
www.alpsr.com www.gdxdz.com www.xbswitch.com					