

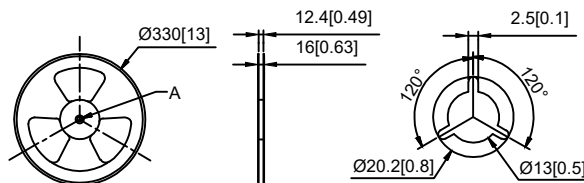





- 1.RATING:DC 12V,50mA Max
- 2.TRAVEL:0.15±0.05mm
- 3.LIFE:300,000cycles
- 4.PACKAGE:5000Pcs/Reel

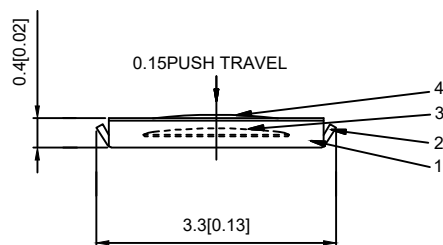

PAPT NO	TS-2630A-X
Operating Force	B:200gf C:260gf
Height	H:0.45

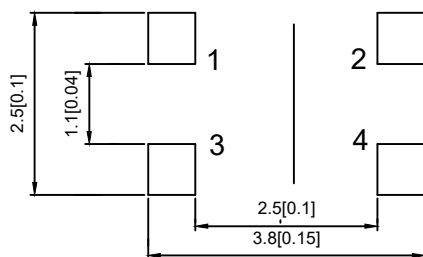

Recommended PAD Layout
Recommended solder thickness T=0.1±0.01

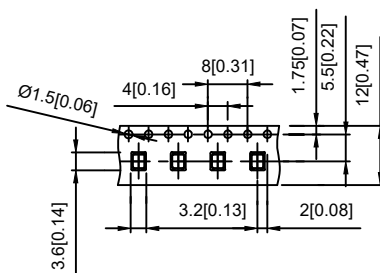

CIRCUIT DIAGRAM

⑤	Terminal	—	4	Brass (0.30t)	AG Plated	—
④	Contact	—	2	F.ag/Sus		—
③	Base	—	1	LCP		—
②	Cover	—	1	Kapton	Tin plated	—
①	Keystake	—	1	PET		—
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

						DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH		
					units: mm	DWN		DATE		VIEW:	PART NO.:		
Δx					tolerance: X.X	CHKD		DATE		UNIT: mm/in	DWG NO.: TS-2630A-X		
Δx					X.XX ±0.2mm								
Δx					X.XXX ±0.1mm	APPD		DATE		SIZE: A4	WEIGHT: 1.0g		
MARK	DESCRIPTION			DATE	REVISED								APPROVED
REVISIONS						UNSPECIFIED TOLERANCES						DONG GUAN XI BANG ELECTRONIC CO., LTD	
www.alpsr.com www.qdxirz.com www.xhswitch.com													

units: mm					
tolerance:					
X.X	±0.2mm				
X.XX	±0.1mm				
X.XXX	±0.05mm				
MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
REVISIONS					
www.alpsr.com www.gdxdz.com www.xbswitch.com					