

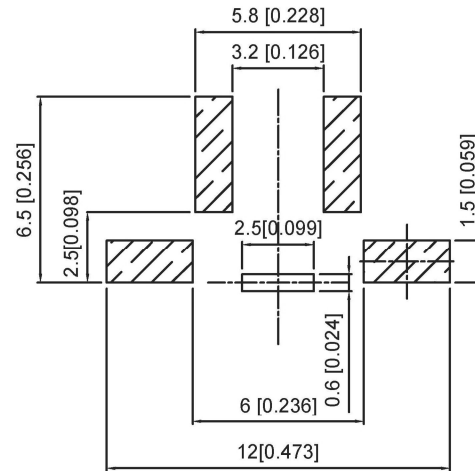


P.C.B Mounting Pattern Dimension

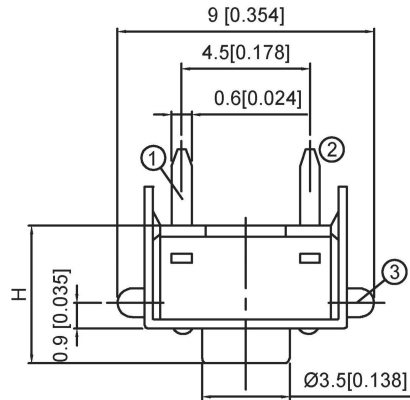



Circuit Diagram



Code-x	H
A	4.3
B	4.5
C	5.0
D	5.5
E	6.0
F	6.5
G	7.0
H	7.5
I	8.0

SPECIFICATION

Contact Rating:	50mA, 12V DC
Contact Resistance:	100mΩ max
Insulation Resistance:	100mΩ min. 500V DC
Dielectric Strength:	250V AC/1minute
Travel:	0.25mm
Operating Temp:	-30℃~+85℃
Storage Temp:	-30℃~+80℃

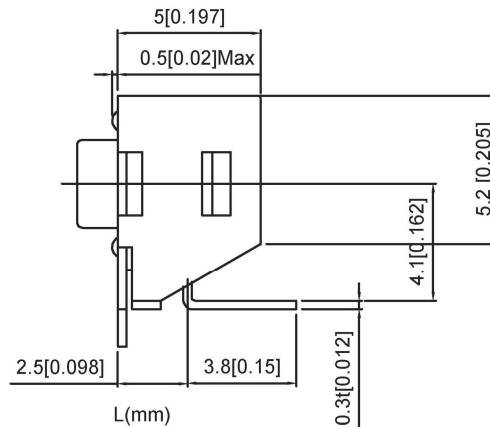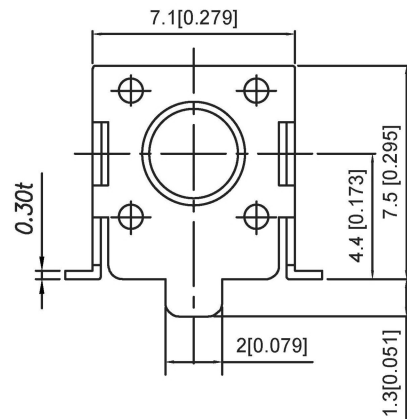

PAPT NO	TS-1102US-X-X
Operating Force	B:160gf C:260gf
Height	Code-x

⑤	Terminal	—	2	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Pa46		—
②	Cover	—	1	Spcc	Plating Nickel	—
①	Keystake	—	1	Pa46		—
ITEM	PAPT NAME	TER,NO	QTY	MATERIAL	FINISHING	REMARK

					units: mm
ΔX					tolerance:
ΔX					X.X ±0.2mm
ΔX					X.XX ±0.1mm
MARK	DESCRIPTION	DATE	REVISED	APPROVED	X.XXX ±0.05mm
REVISIONS					UNSPECIFIED TOLERANCES
www.alpsr.com www.gdxyz.com www.xbswitch.com					

DSND		DATE		SCALE: N/A	MODEL TYPE:
DWN		DATE		VIEW:	TACT SWITCH
CHKD		DATE		UNIT: mm/in	PART NO.:
APPD		DATE		SIZE: A4	DWG NO
DONG GUAN XI BANG ELECTRONIC CO., LTD					TS-1102US-X-X
					WEIGHT
					1.0g
					SHEET
					1/1
					REVISION
					A0