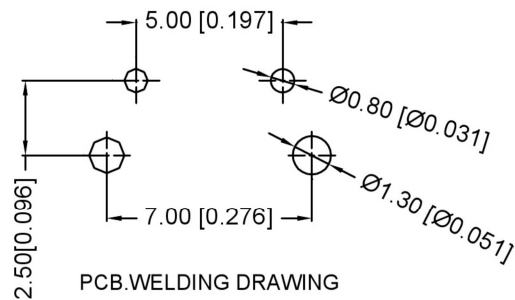
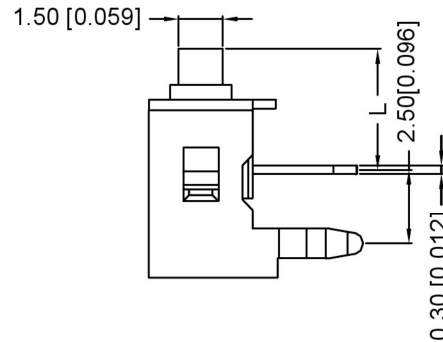
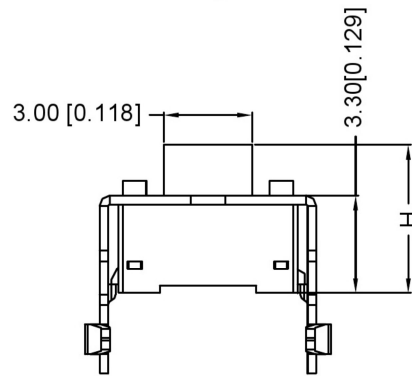
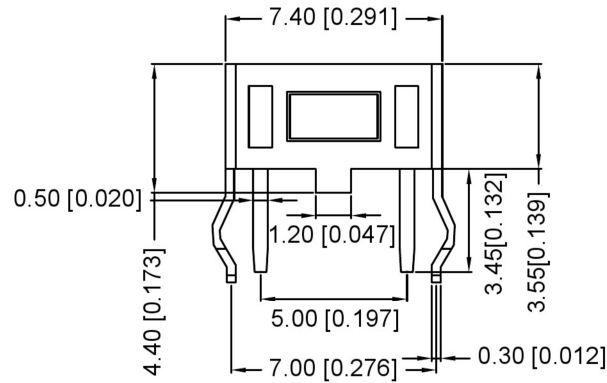
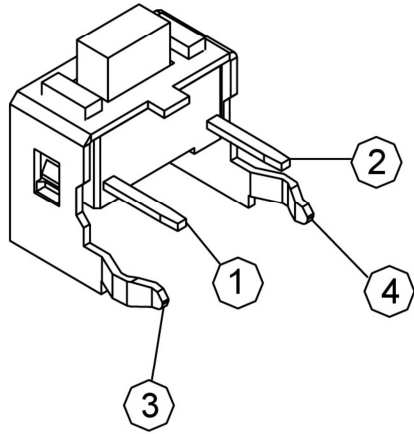


H	L
4.3	3.35
4.5	3.55
4.8	3.85
5.0	4.05
5.3	4.35
5.5	4.55

SPECIFICATION

Contact Rating:	50mA, 12V DC
Contact Resistance:	100mΩ max
Insulation Resistance:	100mΩ min. 500V DC
Dielectric Strength:	250V AC/1minute
Travel:	0.20mm
Operating Temp:	-20℃~+70℃
Storage Temp:	-30℃~+80℃

PAPT NO	TC-1101V-X-X-X
Operating Force	A:100gf B:160gf C:260gf
Height	Code-X
Color	B:black W:white

⑤	Terminal	—	2	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	PPA	—	—
②	Cover	—	1	Spcc	Plating Nickel	—
①	Keystake	—	1	PPA	—	—
ITEM	PAPT NAME	TER.NO	QTY	MATERIAL	FINISHING	REMARK

							DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH			
					units:	mm	DWN		DATE		VIEW:	PART NO.:			
Δx					tolerance:		CHKD		DATE		UNIT: mm/in	DWG NO.:			
Δx						X.X ±0.2mm						TC-1101V-X-X-X			
Δx						X.XX ±0.1mm	APPD		DATE		SIZE: A4				
MARK	DESCRIPTION			REVISIONS	DATE	REVISED	APPROVED								
							UNSPECIFIED TOLERANCES			DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISION
													1.0g	1/1	A0