

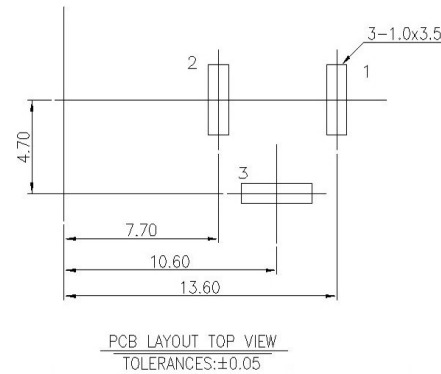






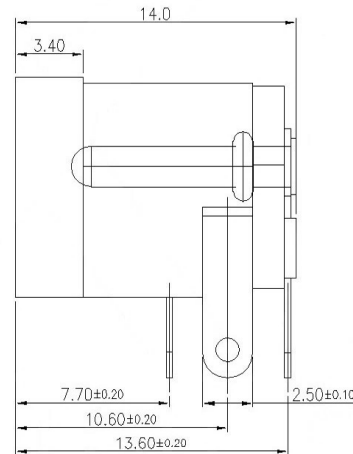

- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - 1-1. RATING:
 - 1-2. CONTACT RESISTANCE: 30mΩ MAX.(INITIAL)
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 - 1-4. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500V DC
 - MECHANICAL CHARACTERISTICS:
 - 2-1. INSERTION FORCE : 0.3~3.0 KGF
 - 2-2. WITHDRAWAL FORCE : 0.3~3.0 KGF
 - LIFE TEST: 5,000 CYCLES MIN.
 - FOR REFLOW SOLDERING LEAD-FREE PROCESS.
 - REPRESENT CRITICAL DIMENSIONS.

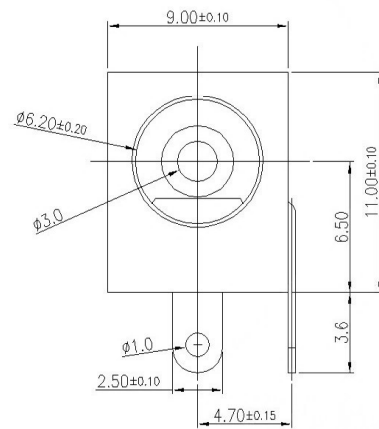

SCHEMATIC	
Model	DC-005
Center Pin	2.0
	2.5
	3.0

	MATERIAL	PLATING
center pin	Brass	silver
terminal 1	Brass	silver
terminal 2	Phosphor Bronze	silver
terminal 3	Brass	silver
plastic	Pbt	

						DSND		DATE		SCALE: N/A	MODEL TYPE: DC POWER JACK		
△X						ANGLAR	±5°	DWN		VIEW:	PART NO.:		
△X						X.X	±0.2mm	CHKD		UNIT: mm	DWG NO.:		
△X						X.XXX	±0.1mm	APPD		SIZE: A4	DC-005-5A-3.0		
MARK	DESCRIPTION	DATE	REVISED	APPROVED							WEIGHT	SHEET	REVISION
REVISIONS						UNSPECIFIED TOLERANCES				东莞市溪榜电子有限公司			
www.switchsmt.com										1.0g 1/1 A0			