








(ø3.50mm DC PLUG DETAIL DRAWING)

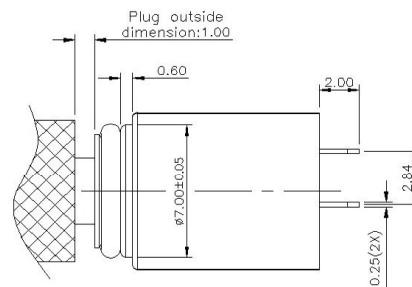


SCHEMATIC



3D VIEW

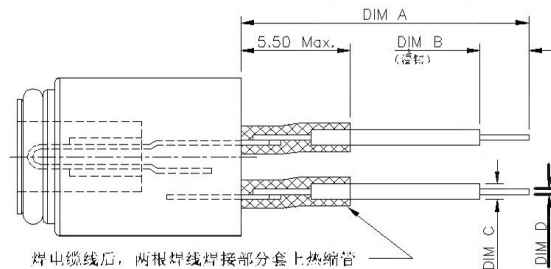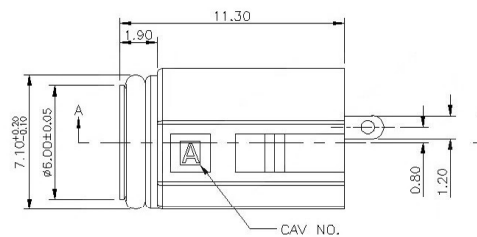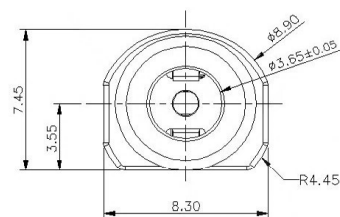

焊电缆线图

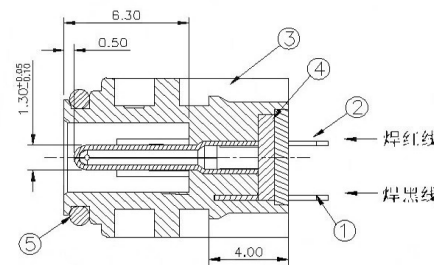

SECTION A-A

NOTES:

1. CONTACT CURRENT RATING: 1.5A.
2. CONTACT RESISTANCE: 60 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 2.94~29.4N(0.30~3.00KgF);
7. CONNECTOR UNMATING FORCES: 2.94~29.4N(0.30~3.00KgF);
8. WATERPROOF STRENGTH: IP-X7.

	MATERIAL	PLATING
plastic	Pa66	
bond		
center pin	Brass	tin
terminal 2	Brass	tin
terminal 3	Phosphor Bronze	tin

							DSND		DATE		SCALE: N/A	MODEL TYPE: DC POWER JACK			
△X						ANGLAR	±5°	DWN		DATE	VIEW: 	PART NO.:			
△X						X.X	±0.2mm	CHKD		DATE	UNIT: mm	DWG NO.:			
△X						X.XX	±0.1mm								
△X						X.XXX	±0.05mm	APPD		DATE	SIZE: A4				
MARK	DESCRIPTION			DATE	REVISED	APPROVED									
REVISIONS							UNSPECIFIED TOLERANCES								
www.switchsmt.com							 东莞市溪榜电子有限公司					WEIGHT	SHEET	REVISION	
												1.0g	1/1	A0	