

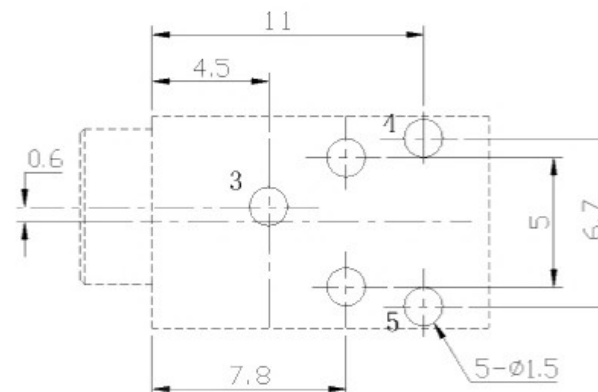
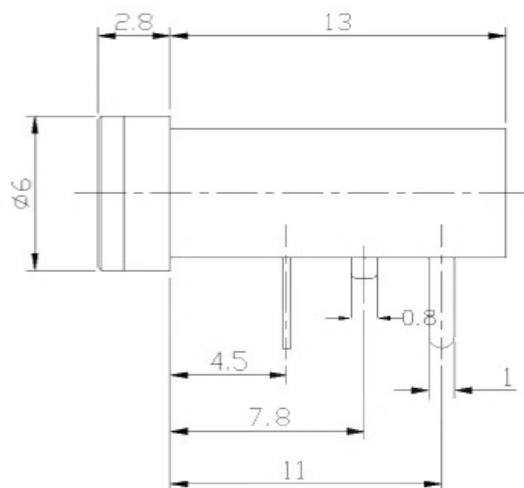


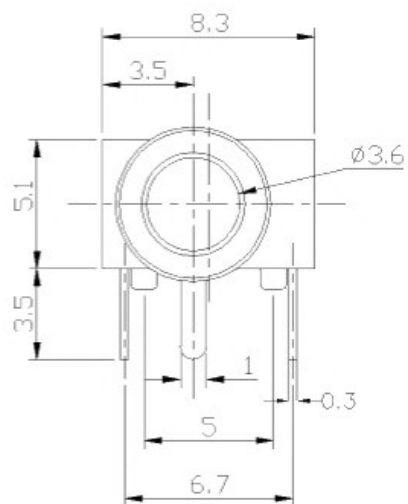

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 0.03\Omega$;
3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. Life test: 5,000 cycles.



	MATERIAL	PLATING
terminal 3	Phosphor Bronze	tin
terminal 4	Phosphor Bronze	tin
terminal 5	Phosphor Bronze	tin
plastic	Pbt	

					ANGULAR	±5°	DSND		DATE	SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK		
△X					X.X	±0.2mm	DWN		DATE	VIEW: 	PART NO.:		
△X					X.XX	±0.1mm	CHKD		DATE	UNIT: mm	DWG NO.:		
△X					X.XXX	±0.05mm	APPD		DATE	SIZE: A4			
MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES		东莞市溪榜电子有限公司				WEIGHT 1.0g	SHEET 1/1	REVISION A0
REVISIONS													