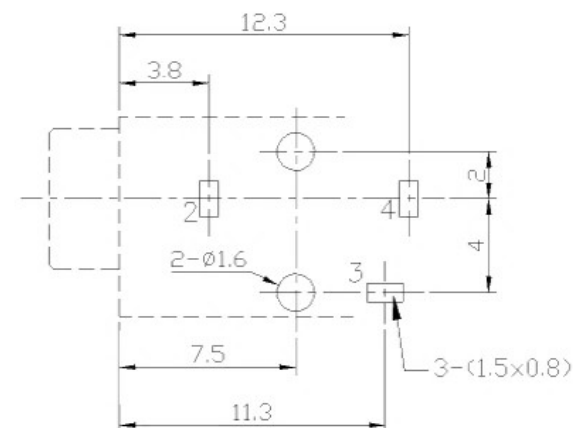
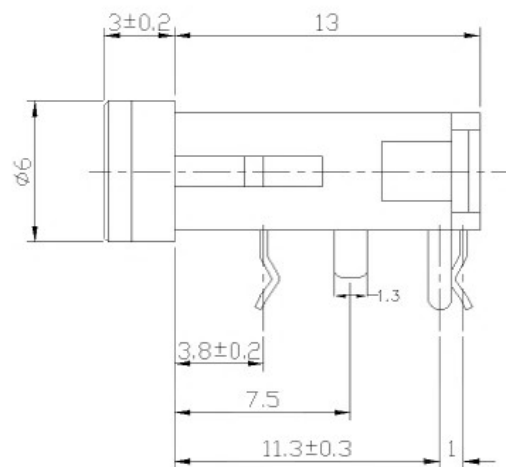


1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 30\text{m}\Omega$;
3. Insulation resistance: $\geq 100\text{M}\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3–25N;
6. life test: 5,000 cycles.

	MATERIAL	PLATING
terminal 2	Phosphor Bronze	tin
terminal 3	Phosphor Bronze	tin
terminal 4	Brass	tin
plastic	Pbt	

						DSND		DATE		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK		
					ANGULAR	±5°	DWN		DATE	VIEW: 	PART NO.:		
△X					X.X	±0.2mm	CHKD		DATE	UNIT: mm	DWG NO.:		
△X					X.XX	±0.1mm	APPD		DATE	SIZE: A4			
△X					X.XXX	±0.05mm							
MARK	DESCRIPTION	DATE	REVISED	APPROVED									
REVISIONS					UNSPECIFIED TOLERANCES		 东莞市溪榜电子有限公司				WEIGHT 1.0g	SHEET 1/1	REVISION A0