
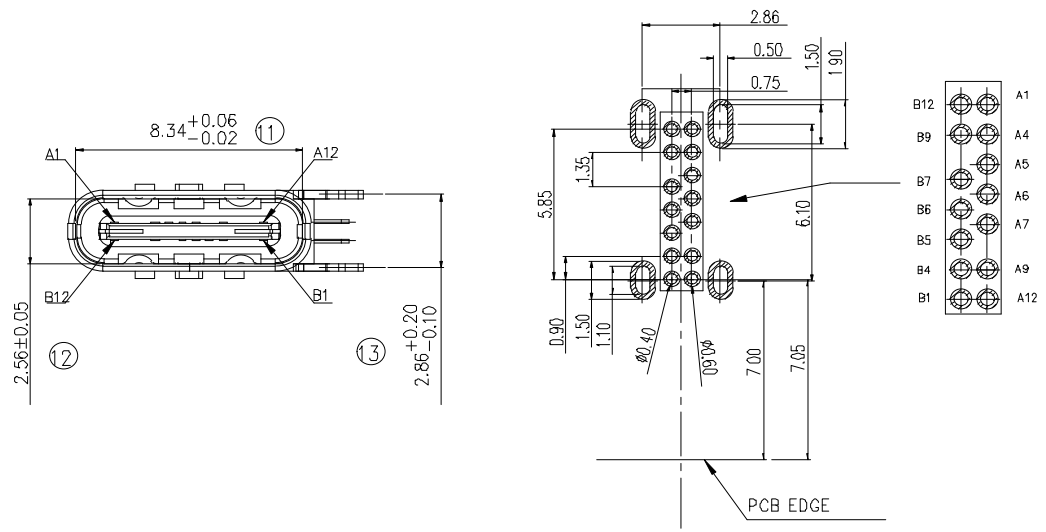


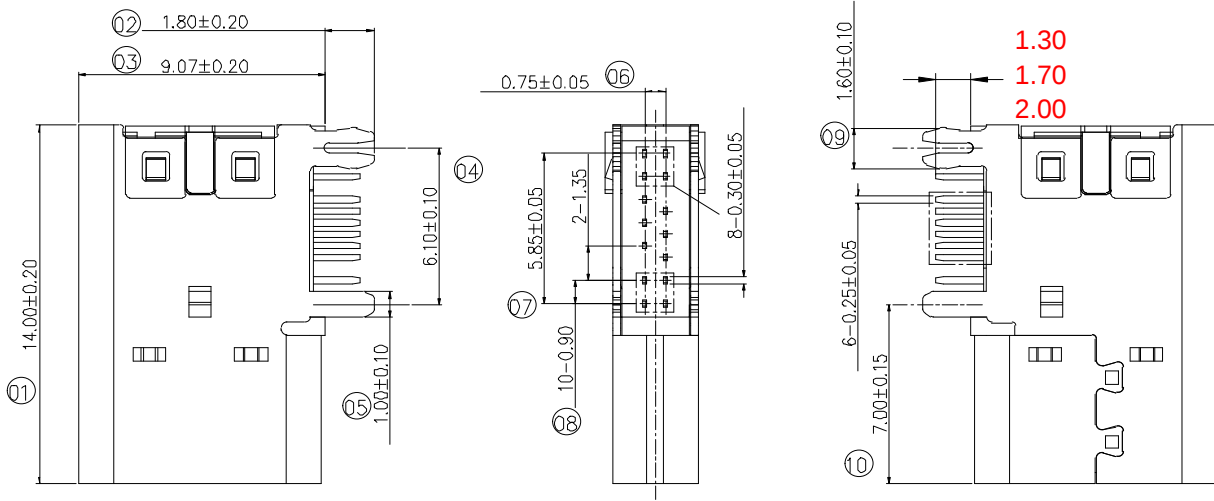

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm


- 特性:
- 一、电气性能: EICTRICAL
 - 1. 额定电流: 5.0A MAX
 - 2. 接触阻抗: 30 MILLIOHMS MAX
 - 3. 耐电压: 150V AC / 1 mA MAX
 - 4. 绝缘阻抗: 150V DC/100 MEGA OHMS MIN
 - 二、机械性能:
 - 1. 插入力: 5-20N
 - 2. 拔出力: 8-20N
 - 3. 使用寿命: 10000次
 - 三、材料: MATERIAL
 - 四、电镀: FINISH
 - 1. 端子: 接触点镀金1U"
 - PIN脚焊接区域涮金.
 - 2. 外壳: 镀哑镍40U"MIN (盐雾24H)
 - 五、电镀品需做粘锡测试: 粘锡面积达到95%以上.
 - 六、SMT回流焊 (峰值260℃±5℃) 不能起泡、熔胶、变色不良 (变形在公差范围内)
 - 七、工作温度: -55℃~+85℃
 - 八、盐雾测试:
 - 通过24H在浓度为5±1%盐水的盐雾测试无生锈现象;
 - 九、管制重点尺寸.

BOM				
序号	名称	料号	用量	品名规格
1	外壳	TC01001	1	Typec侧插14PIN 普通外壳 (4.58) SUS304 T=0.3mm
2	后盖	TC01004	1	Typec侧插14PIN 后盖 SUS201 T=0.2mm
3	Molding 3	TC03003	1	Typec侧插 Molding DIP 14PIN 黄铜 LCP黑色 4.58 半成品
3.1	Molding 1	TC03001	1	Molding DIP 14PIN Molding 上 黄铜 LCP黑色 4.58
3.2	Molding 1	TC03001	1	Molding DIP 14PIN Molding 下 黄铜 LCP黑色 4.58
3.3	卡勾	TC02003	1	Typec侧插 DIP 14PIN 卡勾 SUS301 T=0.15


东莞市溪榜电子有限公司
DONG GUAN XIBANG ELECTRONICS CO., LTD.

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND			VBUS	CC1	D+	D-		VBUS			GND
GND			VBUS		D-	D+	CC2	VBUS			GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1


TOLERANCE: X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 X.° ±10° .X.° ±8° .X ±5° UNIT: mm [inch] SCALE: 1:1 SIZE: A4	DRAWN BY :	DATE :	PART NAME:	
			TYPE-C 14P侧插普通款H14.0	
	CHECKED BY :	DATE :	PART NO.	SEE TABLE
	APPROVED BY :	DATE :	MOLD NO.	
			DRAW NO:	
			SHEET NO.	1 OF 1




产品





吸塑盘：100PCS/盘

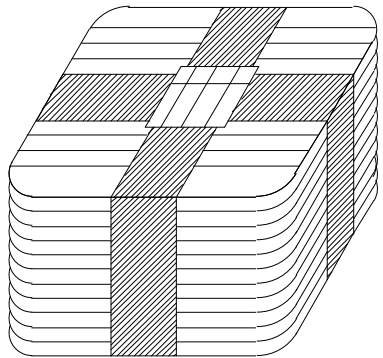

吸塑盘：10盘/扎

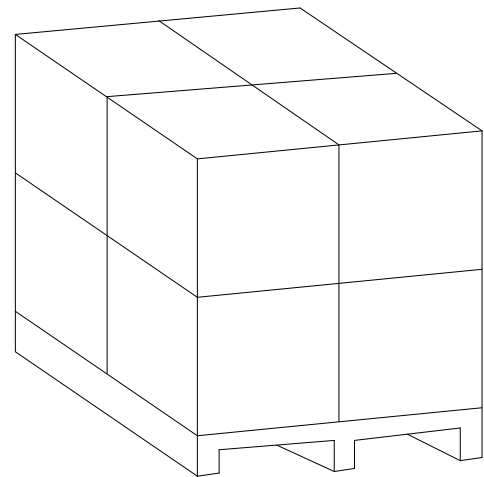

放置地

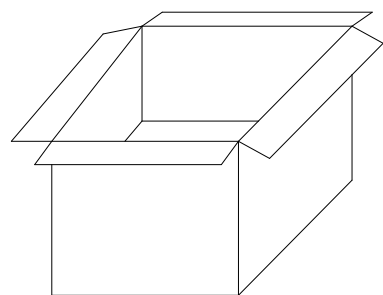

注释

- 1. 吸塑盒 2.31*1.86*0.8/CM
- 2. 数量：100PCS/盒
5000PCS/箱
- 3. 纸箱：38*25*19CM

东莞市溪榜电子有限公司 DONG GUAN XIBANG ELECTRONICS CO., LTD.					
TOLERANCE: X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 X.° ±10° .X° ±8° .XX° ±5°		DRAWN BY :	DATE :	PART NAME: TYPE-C 14P侧插普通款H14.0	
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4		CHECKED BY :	DATE :	PART NO.	SEE TABLE
		APPROVED BY :		DATE :	MOLD NO.
				DRAW NO.	
				SHEET NO.	1 OF 1