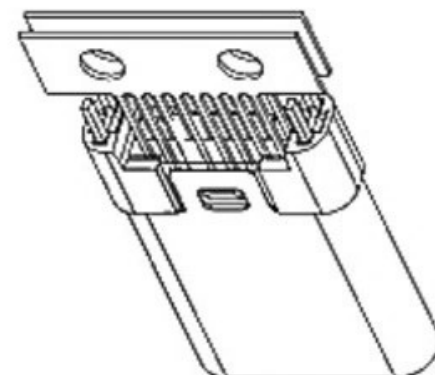
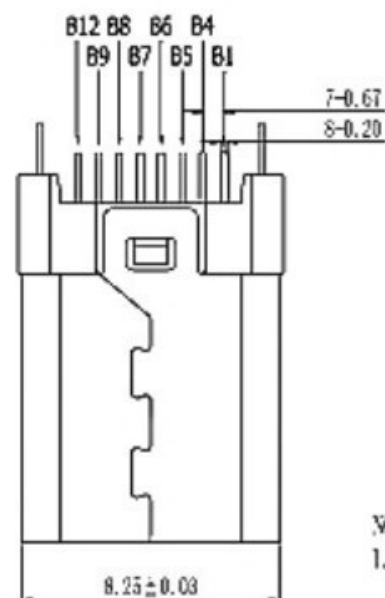
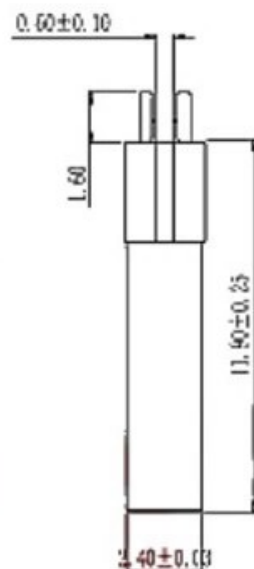
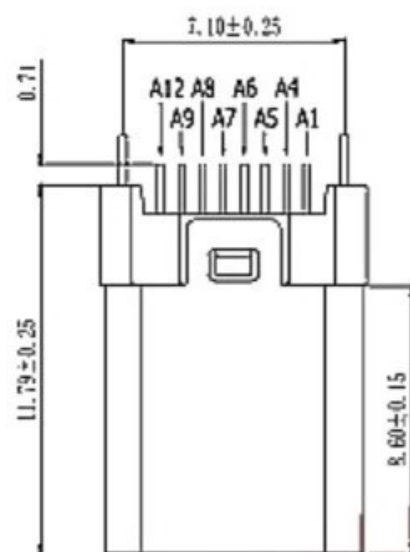


USB TYPE C 按线示意图		
A1, A9, B9, B1	V	
A5		
B5		
A1, A12, B1, B12	G	
A6	D+	
A7	D-	
(R1=50KΩ R3=50KΩ) 5%		

NOTES:

1. MECHANICAL:

MATING FORCE: 5-20N

UNMATING FORCE: 8-20N

DURABILITY: 10000 CYCLES MIN.

2. ELECTRICAL:

CURRENT: 5.0A MAX

VOLTAGE: 20V MAX

WITHSTANDING VOLTAGE: 100V AC

CONTACT RESISTANCE: 40 mΩ MAX INITIAL;

50 mΩ MAX AFTER 10000 CYCLES

3. ENVIRONMENTAL

OPERATING TEMPERATURE RANGE -30°C ~ +80°C

NO.	DESCRIPTION	QTY.	MATERIAL	TREATMENT
④	GND LATCH	1	STAINLESS STEEL	NICKEL PLATED OVERALL TAB WITH LEAD FREE TIN ALLOY.
③	CONTACT	16	COPPER ALLOY	NICKEL UNDERPLATING OVER ALL GOLD PLATING AT - CONTACT AREA LEAD FREE TIN ALLOY AT TERMINATION.
②	SHELL	1	STAINLESS STEEL	CLEAN
①	HOUSING	2	THERMOPLASTIC UL 94V-0	MOLDED COLOR: BLACK/WHITE

东莞市溪榜电子有限公司

TOLERANCE: X.XX ±0.30 X.XX ±0.10 X.XX ±0.05 X.XX ±0.03	DRAWN BY: 刘志强	DATE: 2015.08.18	PART NAME: TYPE-C16P公头夹板11.94 P=9.6
UNIT: mm [inch]	CHECKED BY: 李毅	DATE: 2015.08.18	PART NO. SEE TABLE
SCALE: 1:1	APPROVED BY: 张少辉	DATE: 2015.08.18	MOLD NO.
SIZE: A4			DRAW NO: 2DJNKJ00001654
			SHEET NO. 1 OF 1