


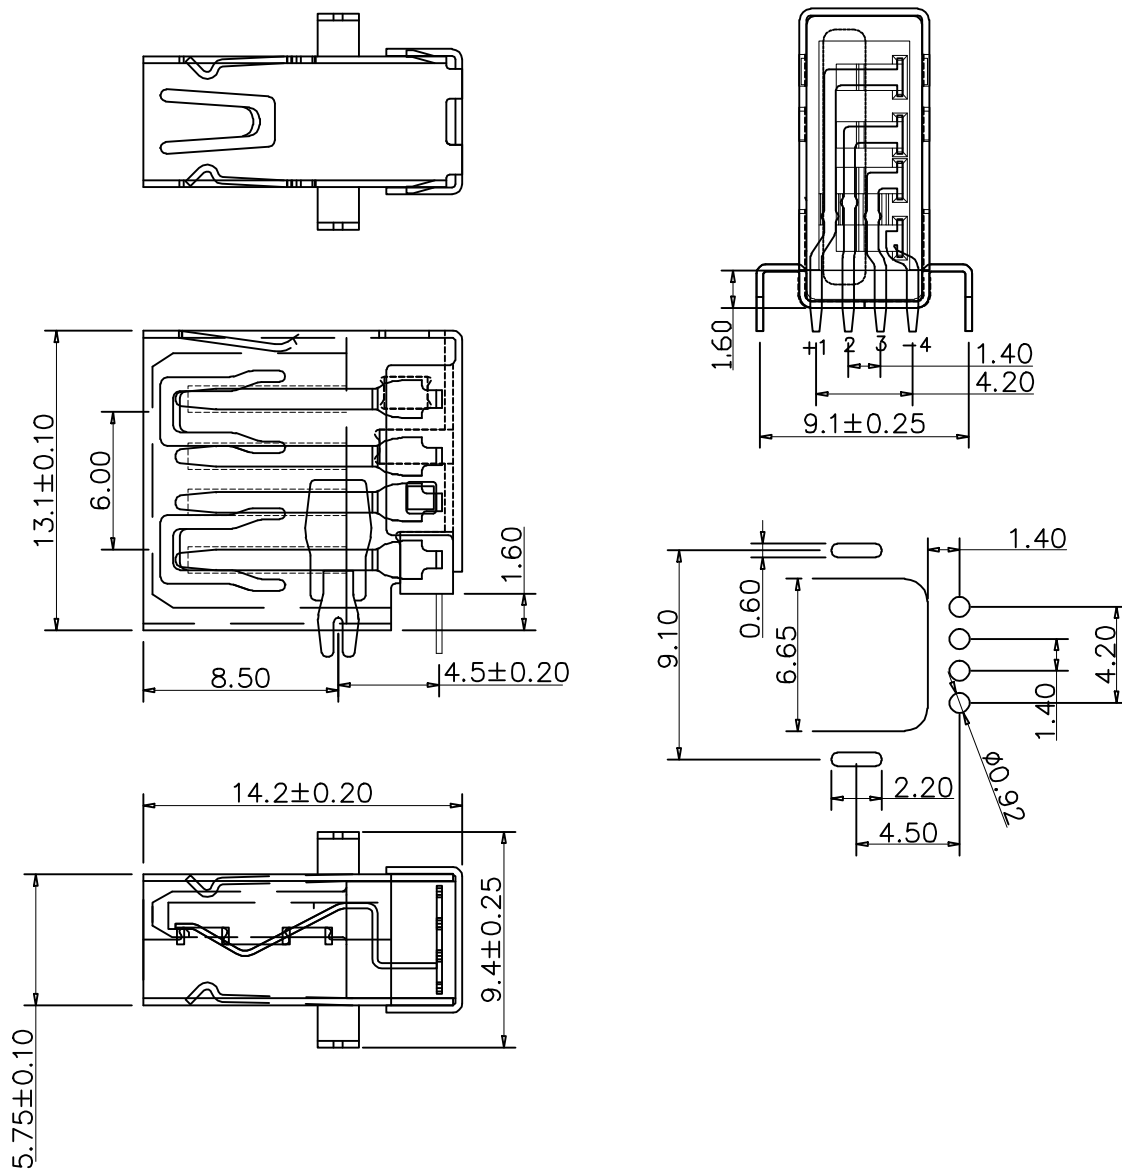

NOTES:

Housing: Thermoplastics,UL94V-0

Contact: Copper Alloy

Shell: Copper Alloy/Steel

Voltage Current Rating:1.5 AMP. 30V AC

Insulation Resistance:1000M Ω Min.

Contact Resistance:30 M Ω Max.

Dielectric Withstanding Voltage:500W AC

Temperature Range:-35 $^{\circ}$ C to +85 $^{\circ}$ C

Insulator color: Black/White

Plastic material:PBT/LCP/Others

Shell finish:Nickel plated/Tin-Lead plated

Mechanical:

Mating Force:3.5KG MAX

Unmating Force:1.02 KG MIN.

Contact finish:

01:Selective Gold Flash

02:Selective Gold 3U"

03:Selective Gold 5U"

04:Selective Gold 15U"

05:Selective Gold 30U"

东莞市溪榜电子有限公司

DONG GUAN XIBANG ELECTRONICS CO., LTD.

TOLERANCE: XXX ±0.30 XX ±0.20 X:XXX ±0.10 X: ±0.05 ±0.02 ±0.01 ±0.005 ±0.002 ±0.001 UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAWN BY :	DATE :	PART NAME:	
		2015.08.18	2.0USB AF侧插沉板母座	
	CHECKED BY:	DATE :	PART NO.	SEE TABLE
		2015.08.18	MOLD NO.	
	APPROVED BY:	DATE :	DRAW NO:	2015.08.18
			SHEET NO.	1 OF 1