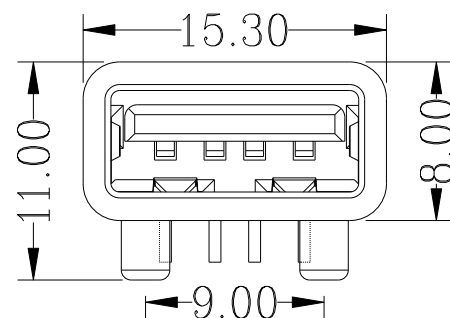
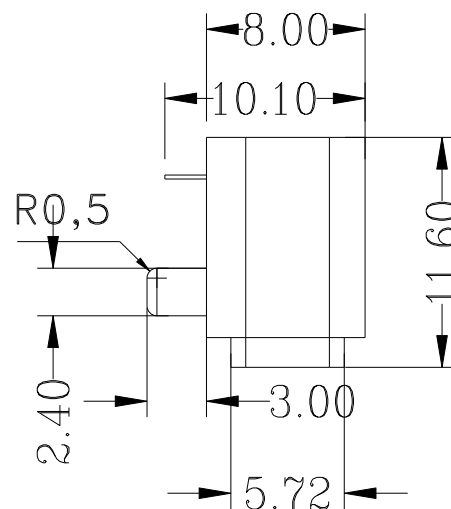
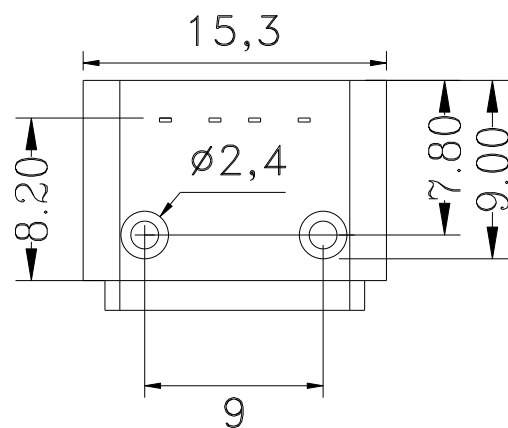


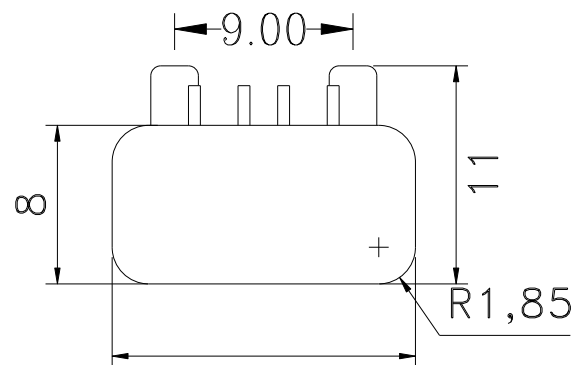


NOTE:

1.MATERIAL

1.1.HOUSING: HIGH TEMP ;PBT WHITE .

1.2.CONTACT: PHOSPHOR BRONZE T=0.2 .

1.3.SHELL: 铜H62 T=0.30.

2. FINISH:

2.1 CONTACT:1U"AU(MIN),80u"MIN TIN PLATING ON SOLDER TAIL AREA, 50u" MIN. NICKEL UNDERPLATING OVERALL.

2.2 SHELL:1u" AURUM MIN PLATING OVERALL.

3.Electrical Characteristics:

Dielectric Withstanding Voltage:AC 100V At 1 minute,


Insulation Resistance:1000 MΩ/ Min,

Contact Resistance:30mΩ/max.

4.Mechanical Characteristics:

Insertion Force: 35N Maximum.Extraction Force:initial5N-15N Minimum.

After 1500 cycles: 5N-15N Minimum.

东莞市溪榜电子有限公司
Dongguan Xibang Electronics Co., LtdTOLERANCE:
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
X.° ±10°
X.° ±5°
X.° ±5°

UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

DATE :

2015.08.18

PART NAME:

USB AF防水
母座卧式插板L11.6

CHECKED BY :

DATE :

2015.08.18

PART NO.

SEE TABLE

MOLD NO.

APPROVED BY :

DATE :

2015.08.18

DRAW NO:

SHEET NO.

1 OF 1