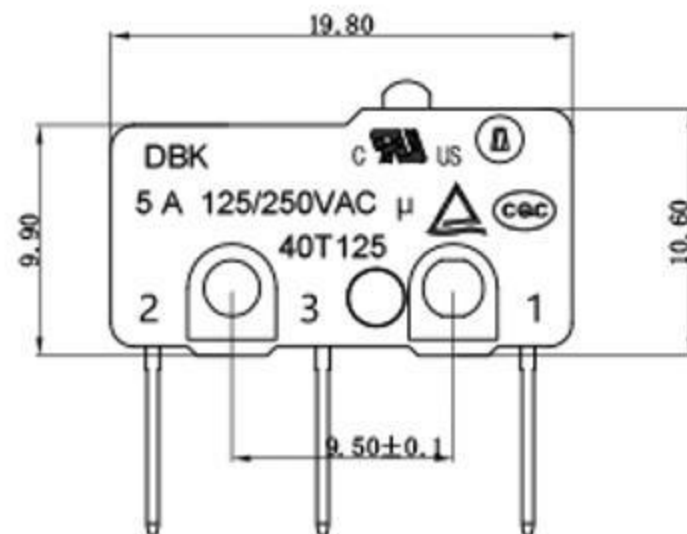
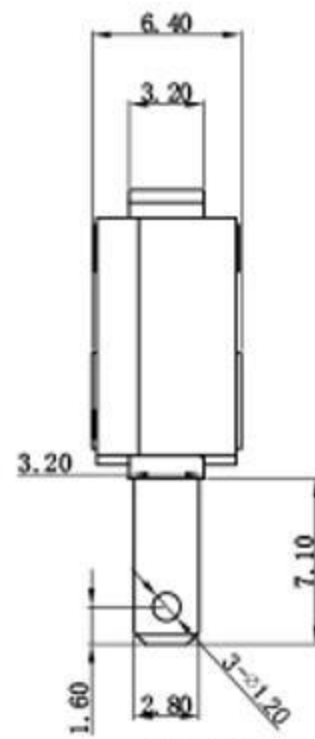
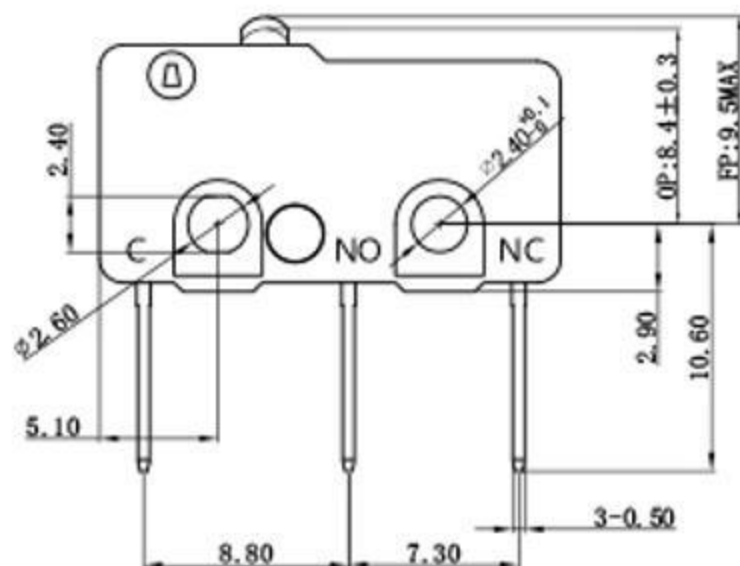
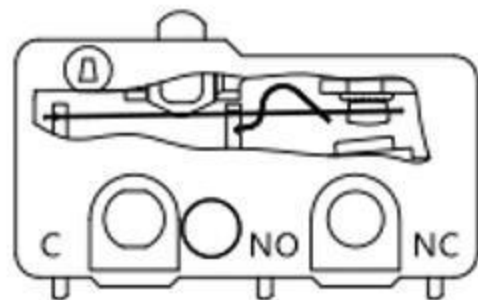


电路图

Rating	5 A 125/250VAC	Mechanical Life	1,000,000 cycles
Contact Resistance	100m Ω	Electrical Life	50,000 cycles
Insulation Resistance	>100M Ω DC500V	Ambient Temper. Used	-40℃ to +125℃
Withstand Voltage	AC1500V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	235±5℃ 5s	Operating Force	200gf MAX

序号 NO.	零件名称 Part Name	数量 Quantity	材质 Material	备注 Notes
10	铆钉(Rivet)	1	AL	
9	触点(CONTACT)	3	Silver Alloy	
8	C弹片(SPRING)	1	C17200	
7	弹片(SPRING)	1	C5210	
6	NO端子(NO TERMINAL)	1	C2600	
5	NC端子(NC TERMINAL)	1	C2600	
4	COM端子(COM TERMINAL)	1	C2600	
3	按钮(BUTTON)	1	PBT	UL94V-0
2	下盖(BASE)	1	PBT	UL94V-0
1	上盖(COVER)	1	PBT	UL94V-0

制 图 DRAWN	林志鹏	东莞市溪榜电子有限公司									
设 计 DESIGN	廖晓斌										
审 核 CHECKED	杨瑞峰	比 例 SCALE	4:1	名 称 TITLE	微动开关						
获 准 APPROVE	廖晓斌	张 数 SHEET	1/1	料 号 P/N NO.							
一 般 公 差 TOLERANCE	10-20	±0.20	单 位 UNIT	mm	图 纸 编 号 P/N NO.						
	2-6	±0.10	角 度 ANGLES	±2.0°	材 质 MATERIAL	材 料 PROJ			工 程 图 ENG DRAW		
	0.5-2	±0.05									

东莞市溪榜电子有限公司

版本 REV	版本编号 REV NO	日期 DATE	变更内容 DEFINITION
-----------	----------------	------------	--------------------