

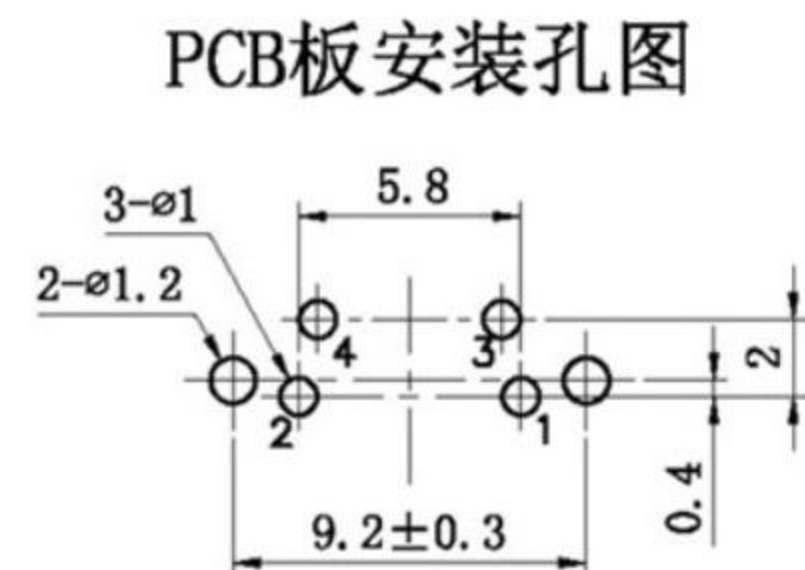
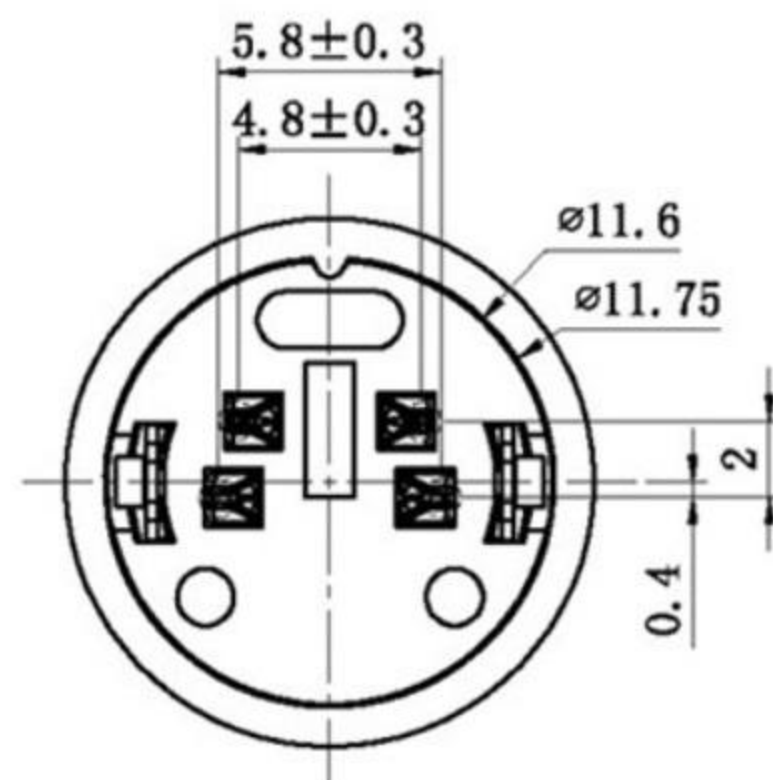
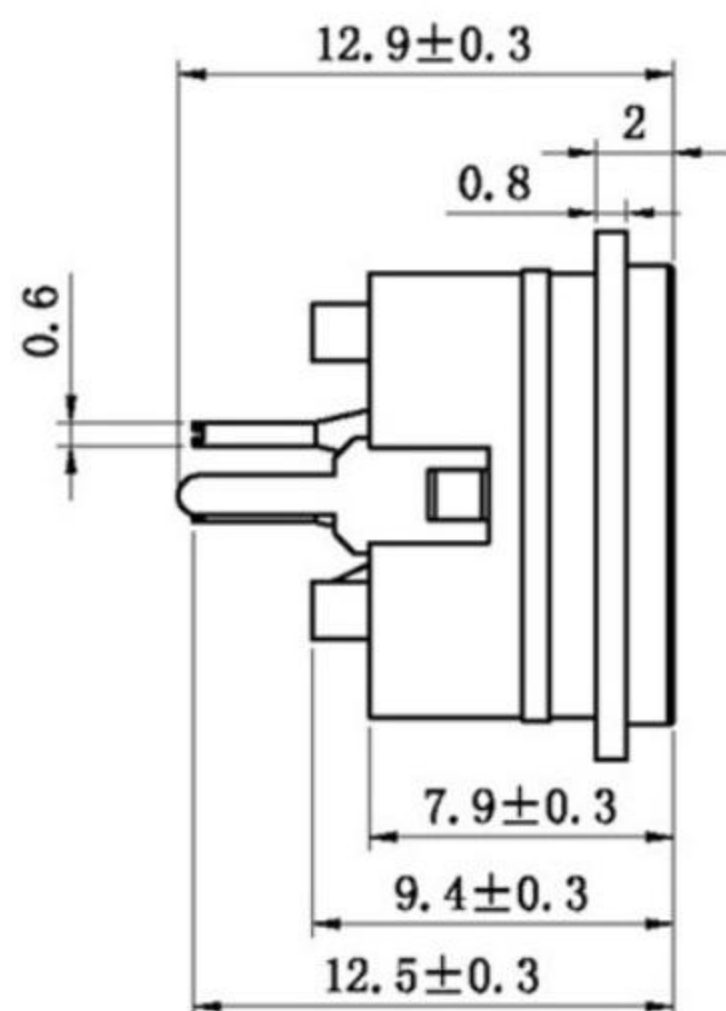


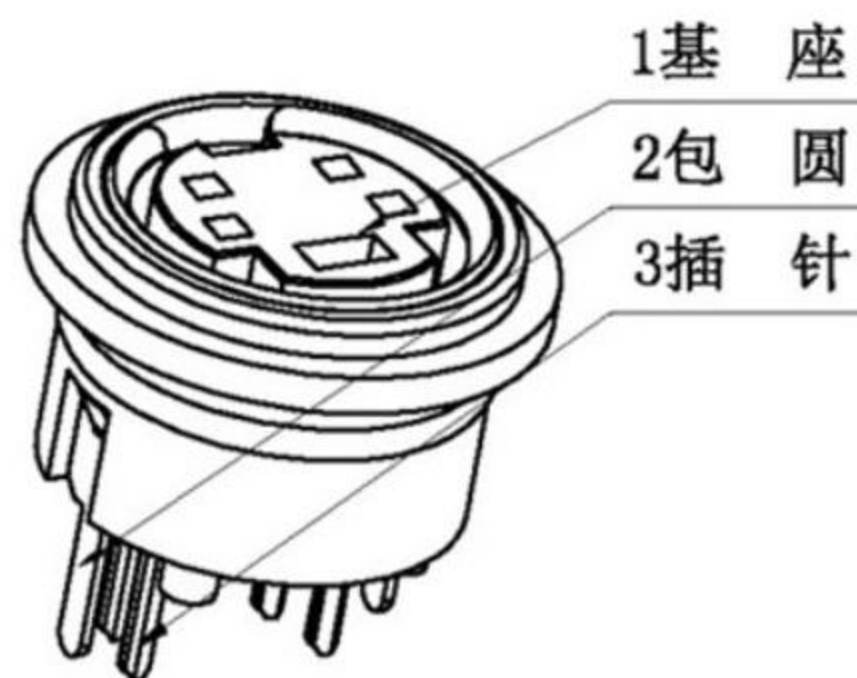

主要技术特性要求:

- 使用条件:
环境温度: -25~70℃
相对湿度: 95% (40℃)
- 额定负荷: 2A 12V DC
- 接触电阻: ≤30mΩ
- 绝缘电阻: ≥100MΩ
- 耐压: AC250V (50Hz) 1min
- 插拔力: 5-35N
- 寿命: 5000次

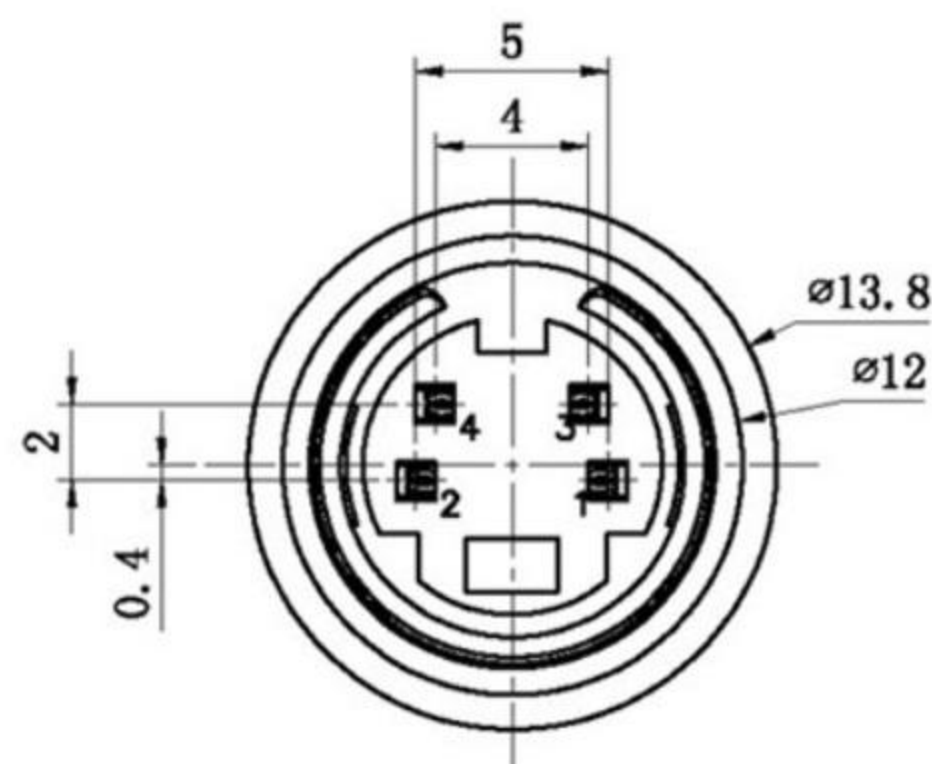

10	铜壳	1	黄铜带H62 Y=0.35mm	D. Cu/Sn			
9	左长针	1	黄铜带H62 Y=0.35mm	D. Cu/Sn			
8	右长针	1	黄铜带H62 Y=0.35mm	D. Cu/Sn			
7	左中针	1	黄铜带H62 Y=0.35mm	D. Cu/Sn			
6	右中针	1	黄铜带H62 Y=0.35mm	D. Cu/Sn			
5	右短针	1	黄铜带H62 Y=0.35mm	D. Cu/Sn			
4	左短针	1	黄铜带H62 Y=0.35mm	D. Cu/Sn			
3	包圆	1	黄铜带H62 Y1=0.25mm	D. Cu/Sn			
2	塑料后盖	1	PBT				
1	基座	1	PBT				
序号	名称	数量	材料	处理	单件质量	总计质量	备注

A4				普通公差	 东莞市溪榜电子有限公司			
A3				COMMON TOLERANCE :				
A2				X.XX ±0.10	单位	mm	投影	品名
A1				X.X ±0.15	UNIT		PROJECTED	PRODUCT NAME
REV.	DATE	REVISION	DESCRIPTION	ISSUE	绘图		核对	型号
					DRAWN BY		CHECKED BY	MODEL NO.
					日期	2013.04.15	核准	图号
					DATE		APPROVAL BY	DWG NO.
					ANGULAR			S端子 DIN插座
					±3°			