

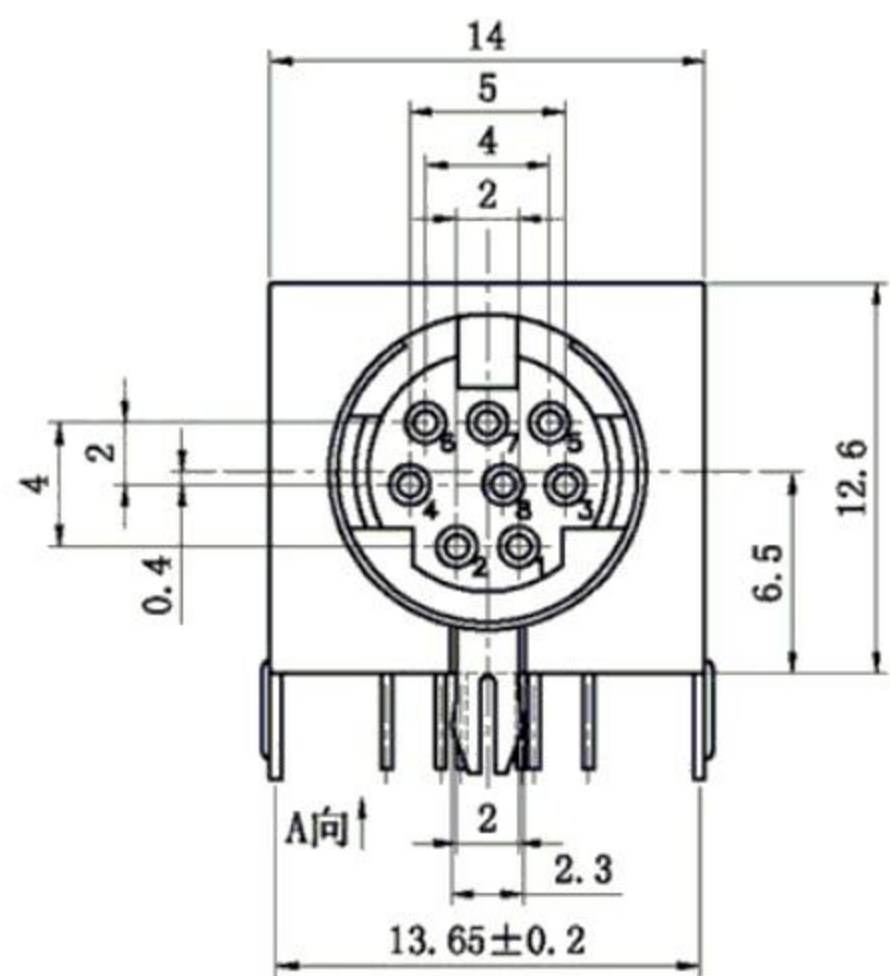
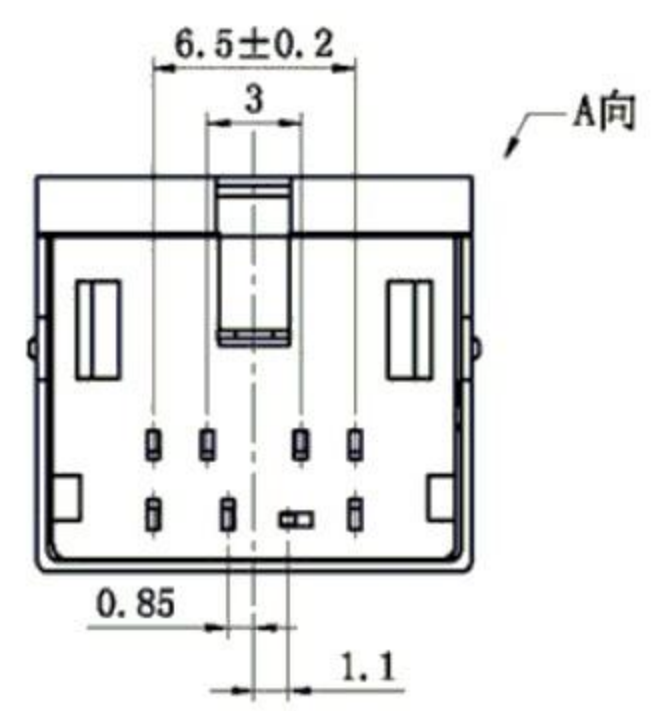


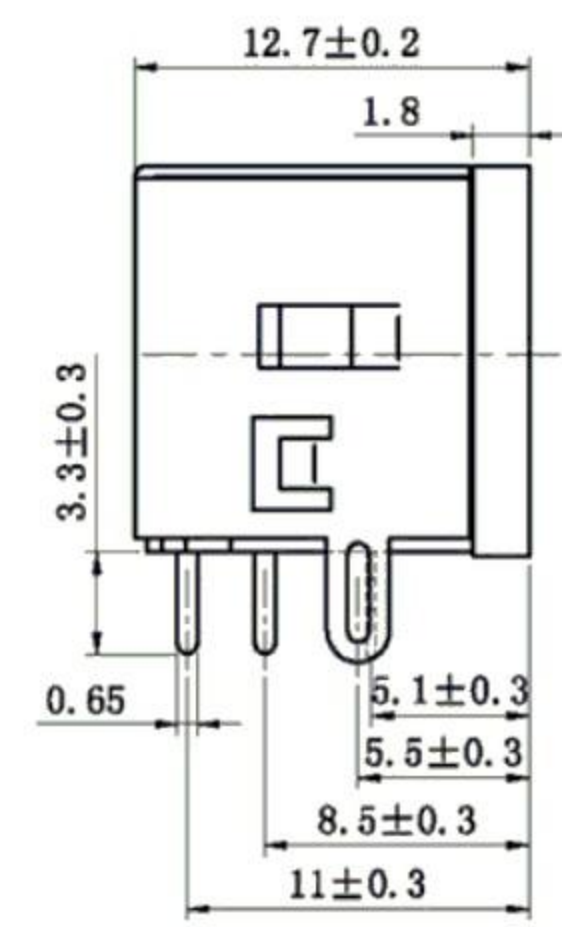

PCB板安装孔图

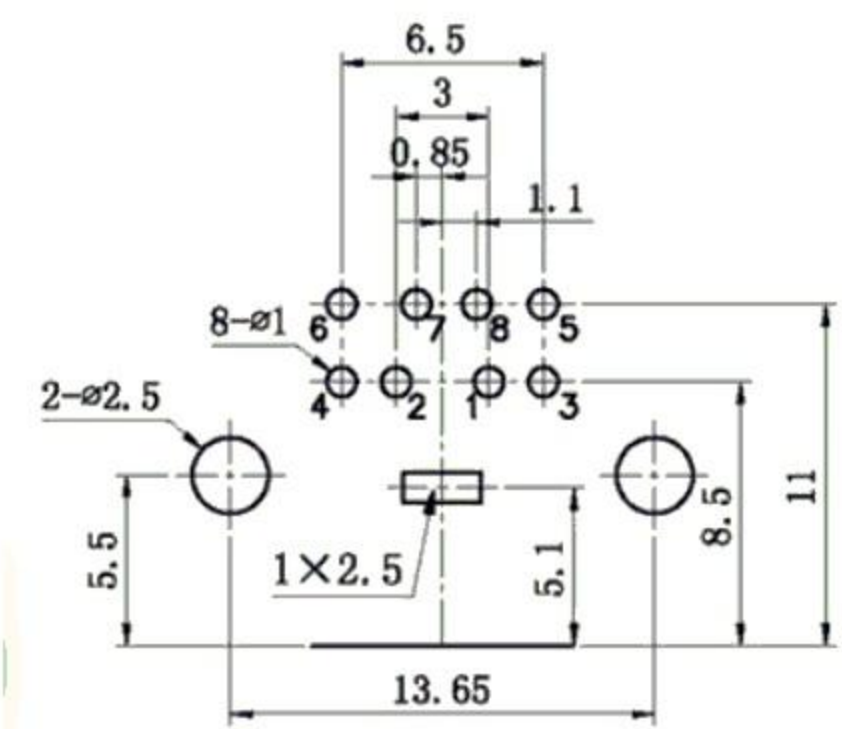

主要技术特性要求:

- 1. 使用条件:
环境温度: -25~70℃
相对湿度: 95% (40℃)
- 2. 额定负荷: 2A 12V DC
- 3. 接触电阻: ≤30mΩ
- 4. 绝缘电阻: ≥100MΩ
- 5. 耐 压: AC250V (50Hz) 1min
- 6. 插 拔 力: 5-35N
- 7. 寿 命: 5000次

10	铜 壳	1	黄铜带H62 Y=0.35mm	D. Cu/Sn			
9	左长针	1	黄铜带H62 Y=0.35mm	D. Cu/Sn			
8	右长针	1	黄铜带H62 Y=0.35mm	D. Cu/Sn			
7	左中针	1	黄铜带H62 Y=0.35mm	D. Cu/Sn			
6	右中针	1	黄铜带H62 Y=0.35mm	D. Cu/Sn			
5	右短针	1	黄铜带H62 Y=0.35mm	D. Cu/Sn			
4	左短针	1	黄铜带H62 Y=0.35mm	D. Cu/Sn			
3	包 圆	1	黄铜带H62 Y1=0.25mm	D. Cu/Sn			
2	塑料后盖	1	PBT				
1	基 座	1	PBT				
序号	名 称	数 量	材 料	处 理	单件 质 量	总计 量	备 注

A4				普通公差		东莞市溪榜电子有限公司							
A3				COMMON TOLERANCE :									
A2				X.XX	±0.10	单 位	mm	投 影		品 名	MDC微型端子	比 例	1: 1
A1				X.X	±0.15	UNIT		PROJECTED		PRODUCT NAME		SCALE	
				X	±0.25	绘 图		核 对		型 号			
						DRAWN BY		CHECKED BY		MODEL NO.			
REV.	DATE	REVISION	DESCRIPTION	ISSUE	ANGULAR	日 期	2013. 04. 15	核 准		图 号	S端子 DIN插座		
					±3°	DATE		APPROVAL BY		DWG NO.			