


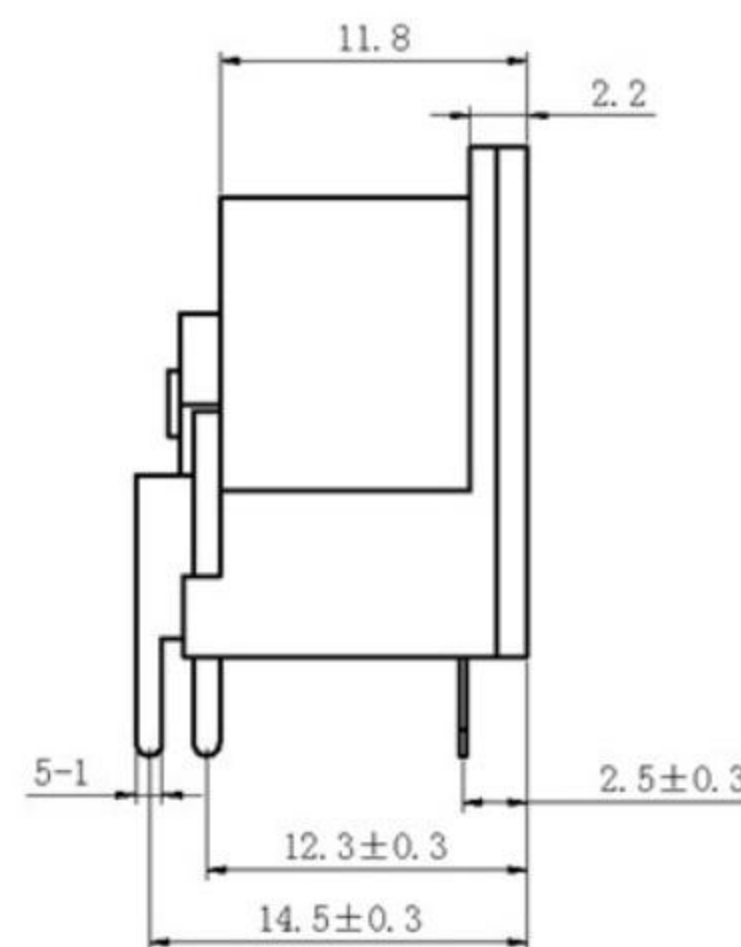

Technical drawing of a rectangular plate with dimensions and hole locations. The plate has a width of 14.7 and a height of 14.5. There are three holes, each with a diameter of 1.5, arranged in a horizontal row. The center-to-center distance between the holes is 10. The distance from the left edge to the center of the first hole is 7. The distance from the center of the first hole to the center of the second hole is 10. The distance from the center of the second hole to the center of the third hole is 10. The distance from the center of the third hole to the right edge is 7. The distance from the top edge to the center of the holes is 12.3. The distance from the bottom edge to the center of the holes is 2.2.

7. 寿命: ≥ 5000 次

4	接地针	1	黄铜=0.38mm	D. Cu/Sn			
3	斜 针	1	黄铜=0.6mm	D. Cu/Sn			
2	弯 针	1	黄铜=0.6mm	D. Cu/Sn			
1	基 座	1	PBT	黑 色			
序号	名 称	数量	材 料	处 理	单件 质 量	总计 量	备 注

A4				普通公差		东莞市溪榜电子有限公司							
A3				COMMON TOLERANCE :									
A2				X.XX	±0.10	单 位 UNIT	mm	投 影 PROJECTED		品 名 PRODUCT NAME	DS端子	比 例 SCALE	1:1
A1				X.X	±0.15	绘 图 DRAWN BY		核 对 CHECKED BY		型 号 MODEL NO.			
				X	±0.25								
REV.	DATE	REVISION	DESCRIPTION	ISSUE	ANGULAR	日 期 DATE	2013.04.10	核 准 APPROVAL BY		图 号 DWG NO.	DS电源插座		
					±3°								