

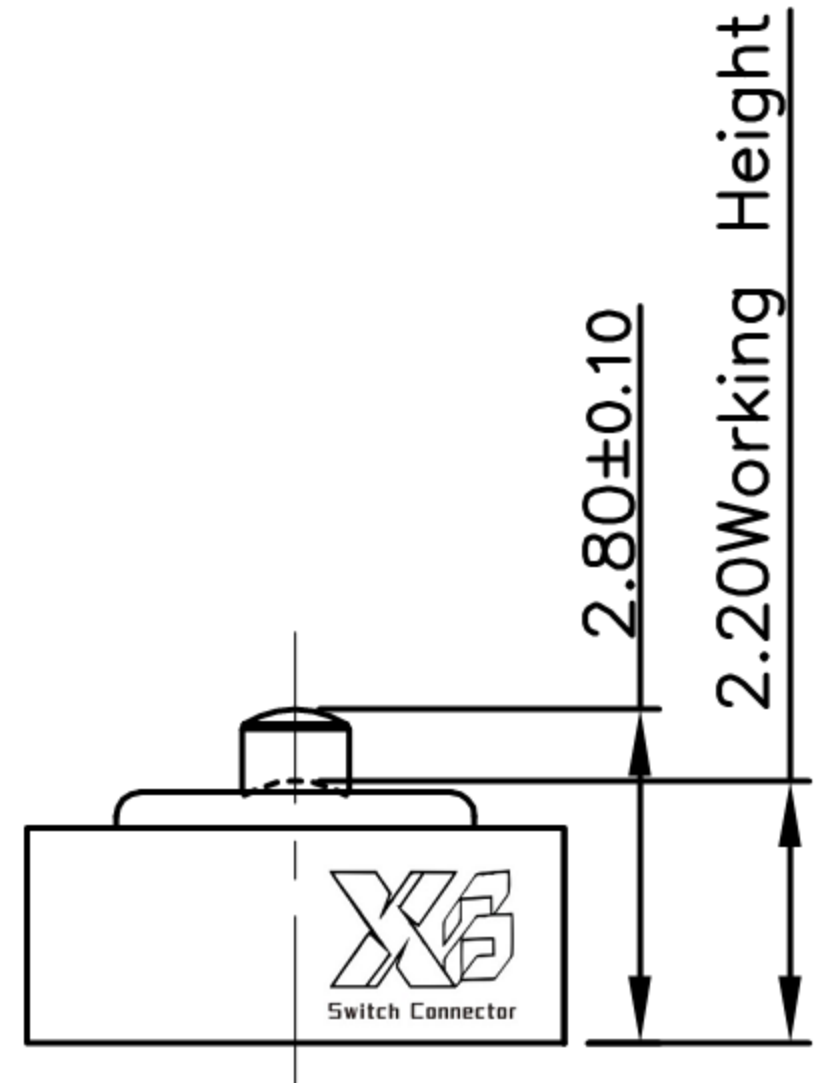
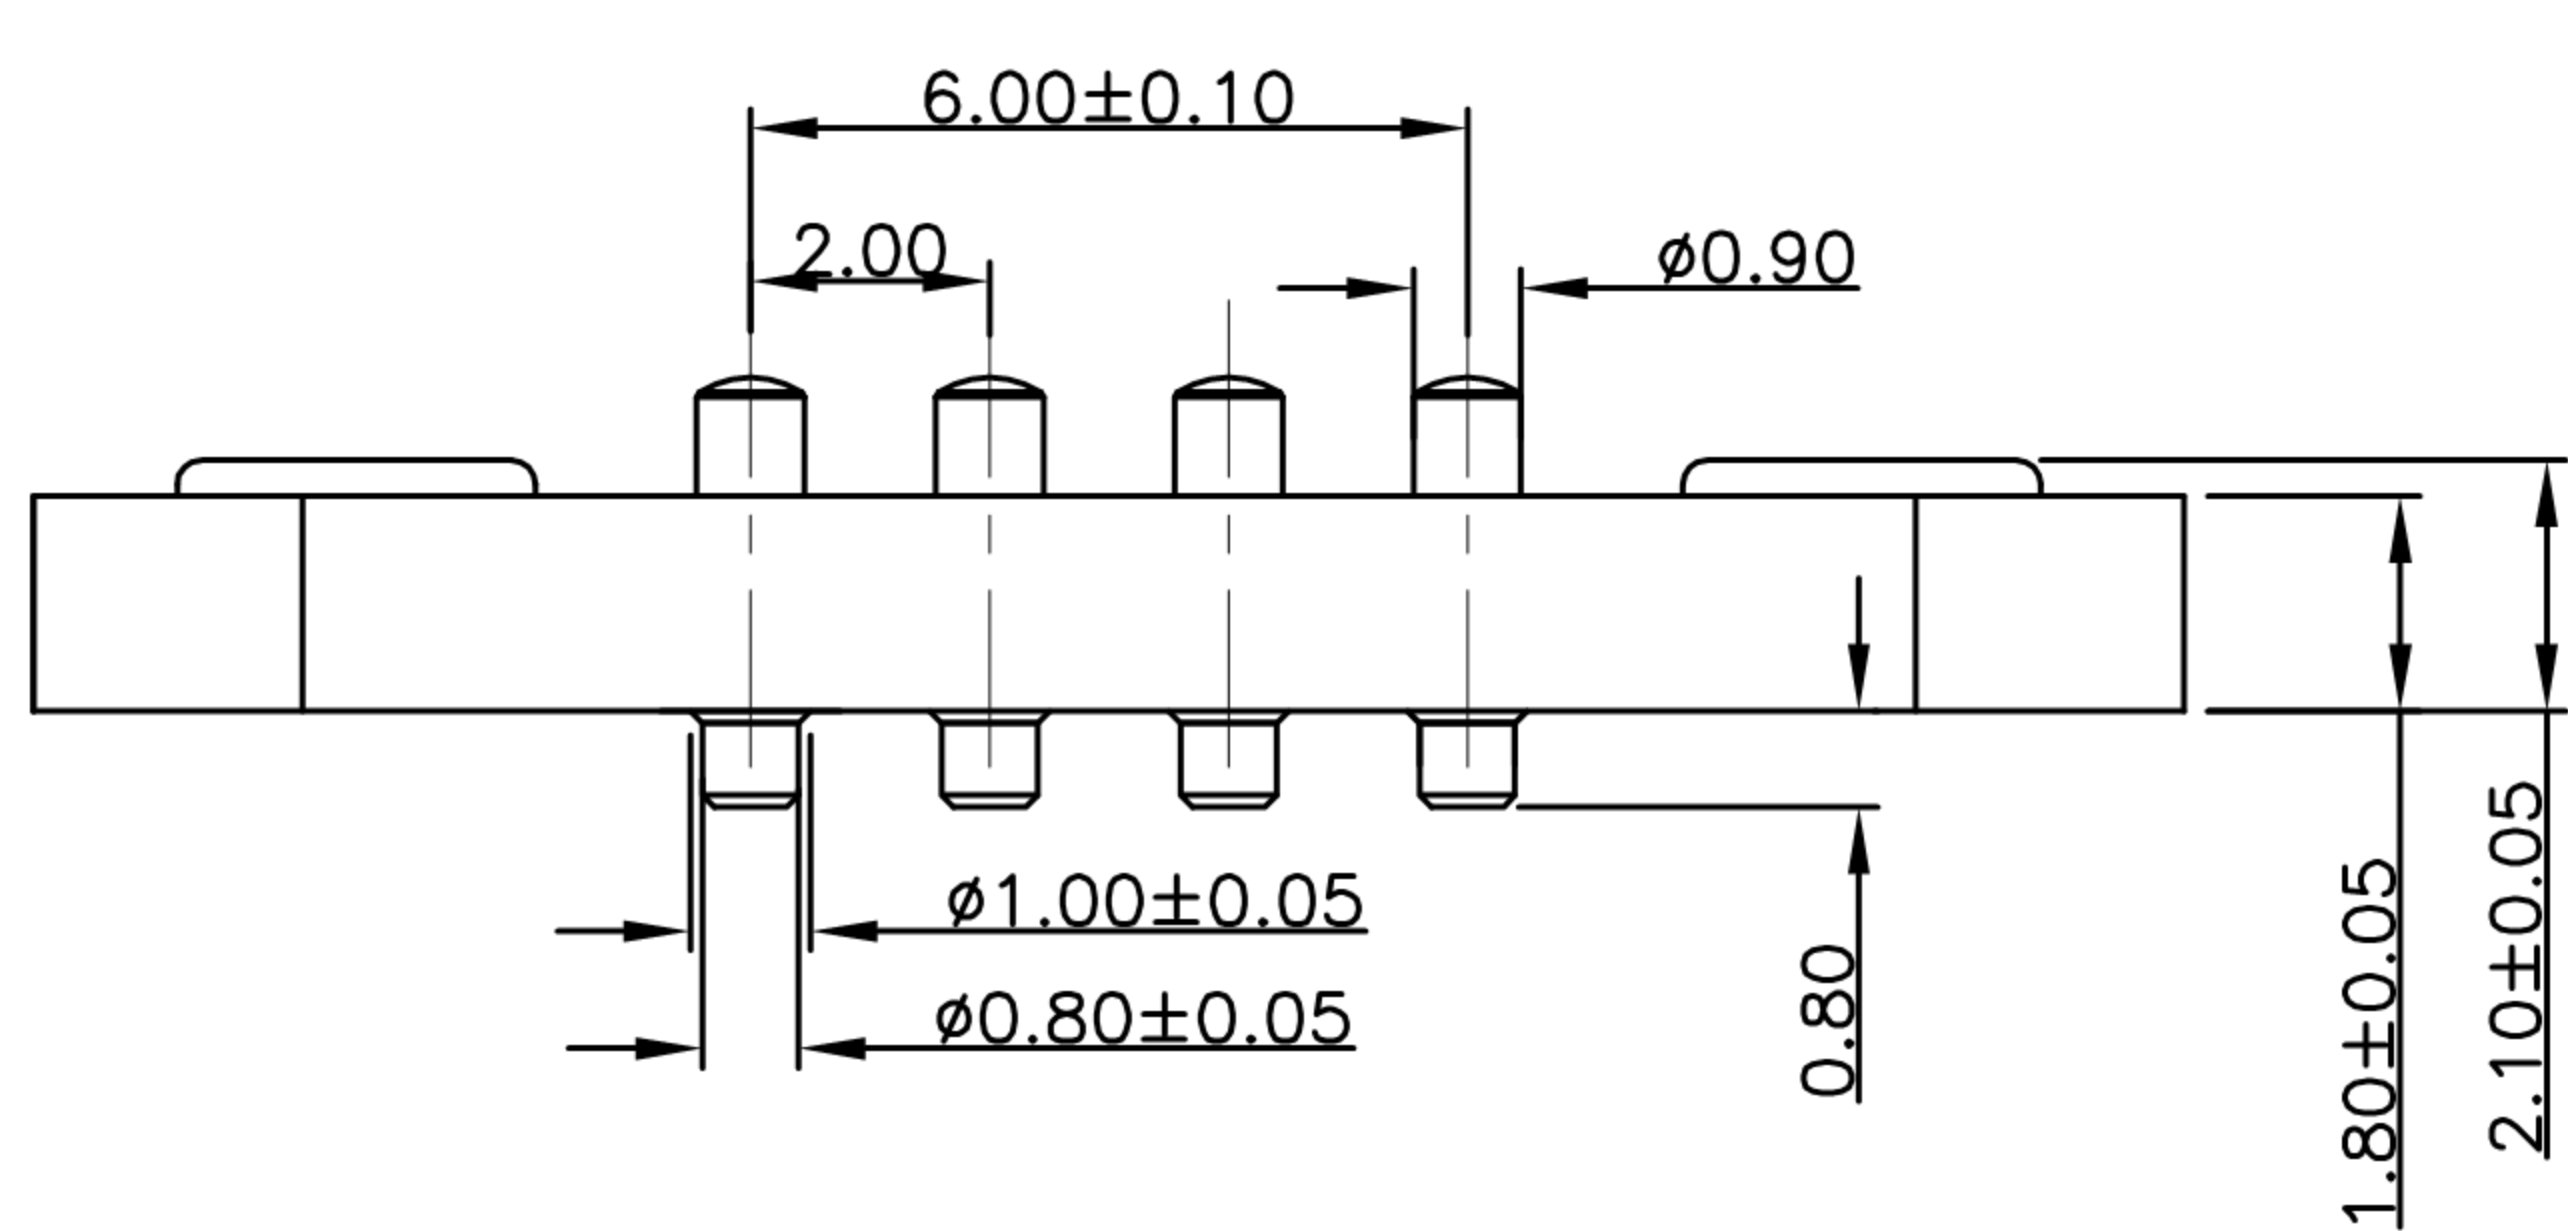


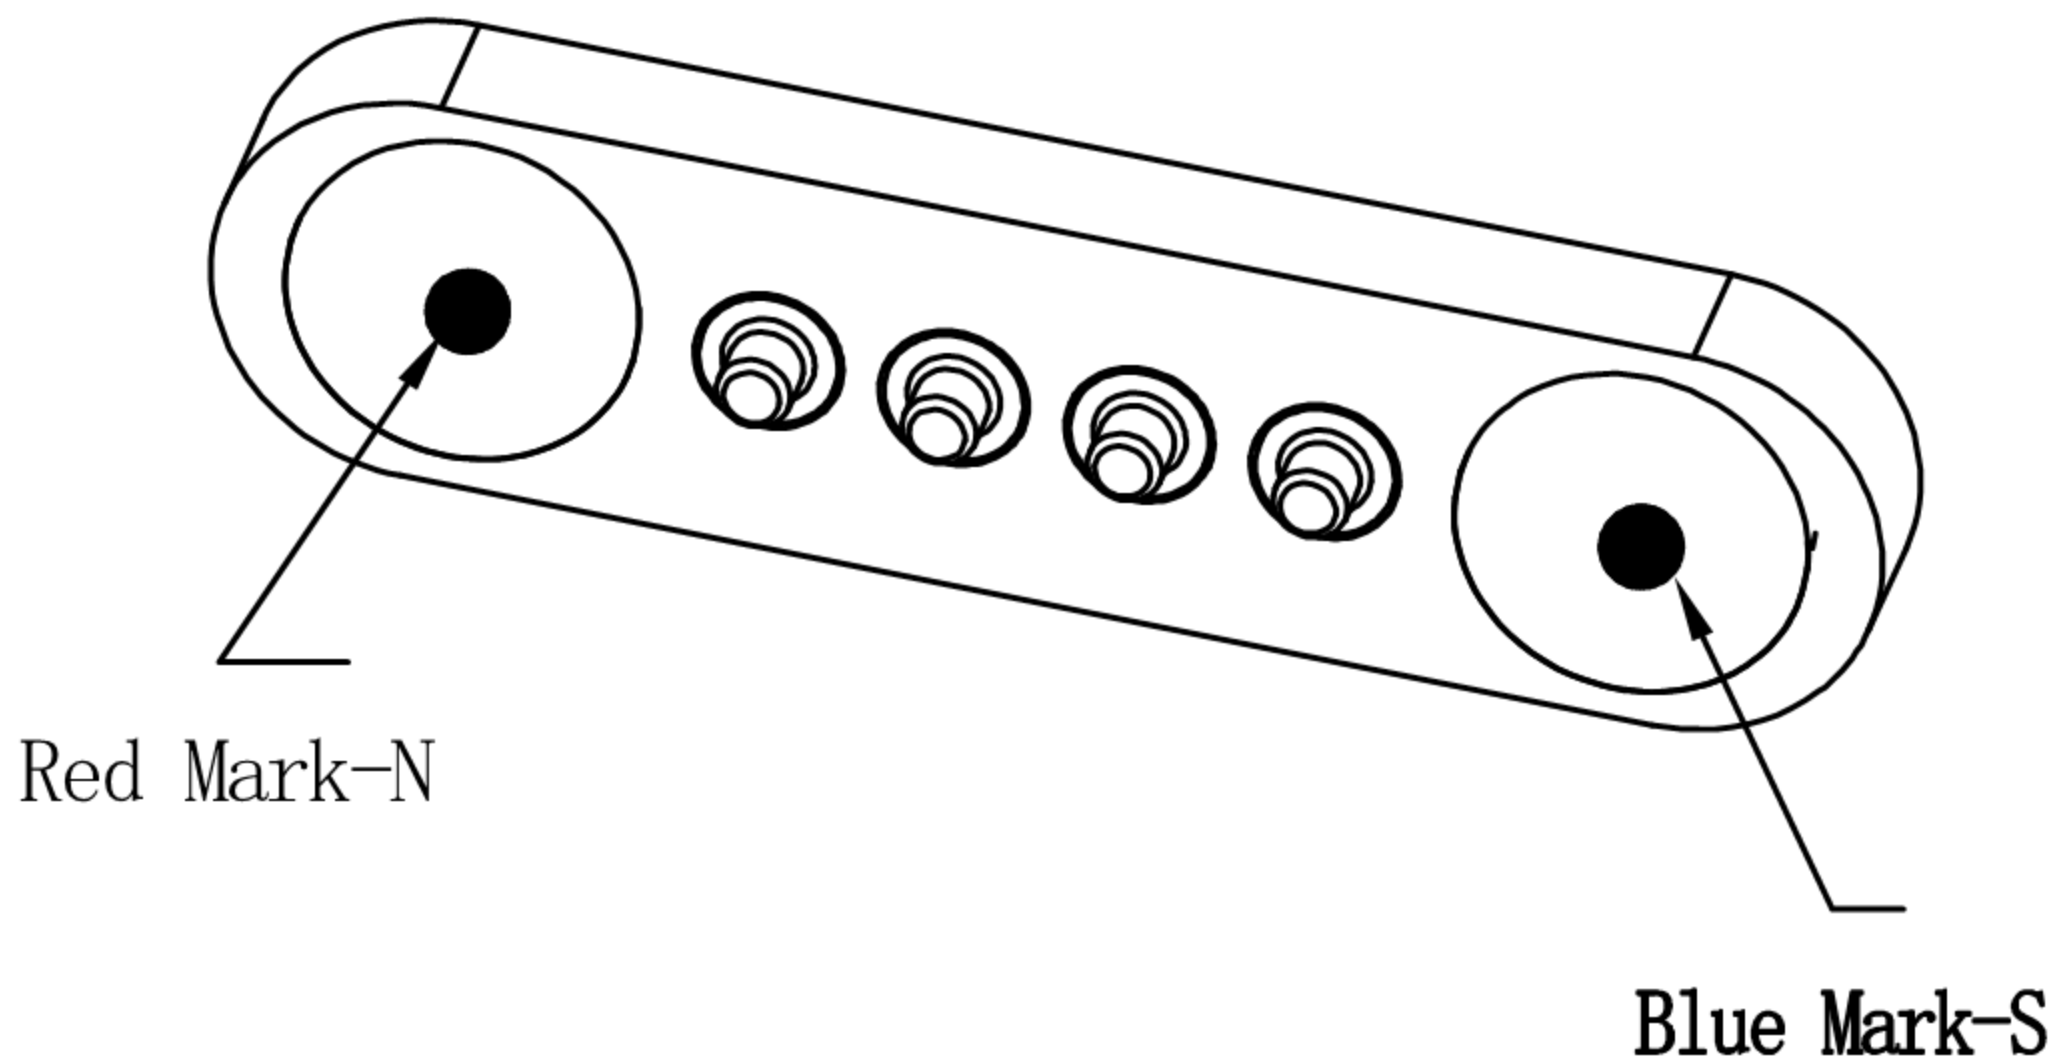

NOTE


- 1.Material
Plunger: Brass
Barrel: Brass
Spring: SUS
Housing: PA46
- 2.Plating
Plunger: Au over NI
Barrel: Au over NI
- 3.Electrical
Rated current & voltage: DC 12V; 2.0A Max.
- 4.Mechanical
Spring force: 60g $\pm$ 20% at normal working height
Durability: 10,000 cycles(minimum)
- 5.To ensure the best usage,please operateit based on the working height Based on the engineering drawings,shall not exceed the maximum allowed compression
- 6.To avoid arcing issue, The adaptor startto power supply after connector mated fully.

图为焊盘位置和大小

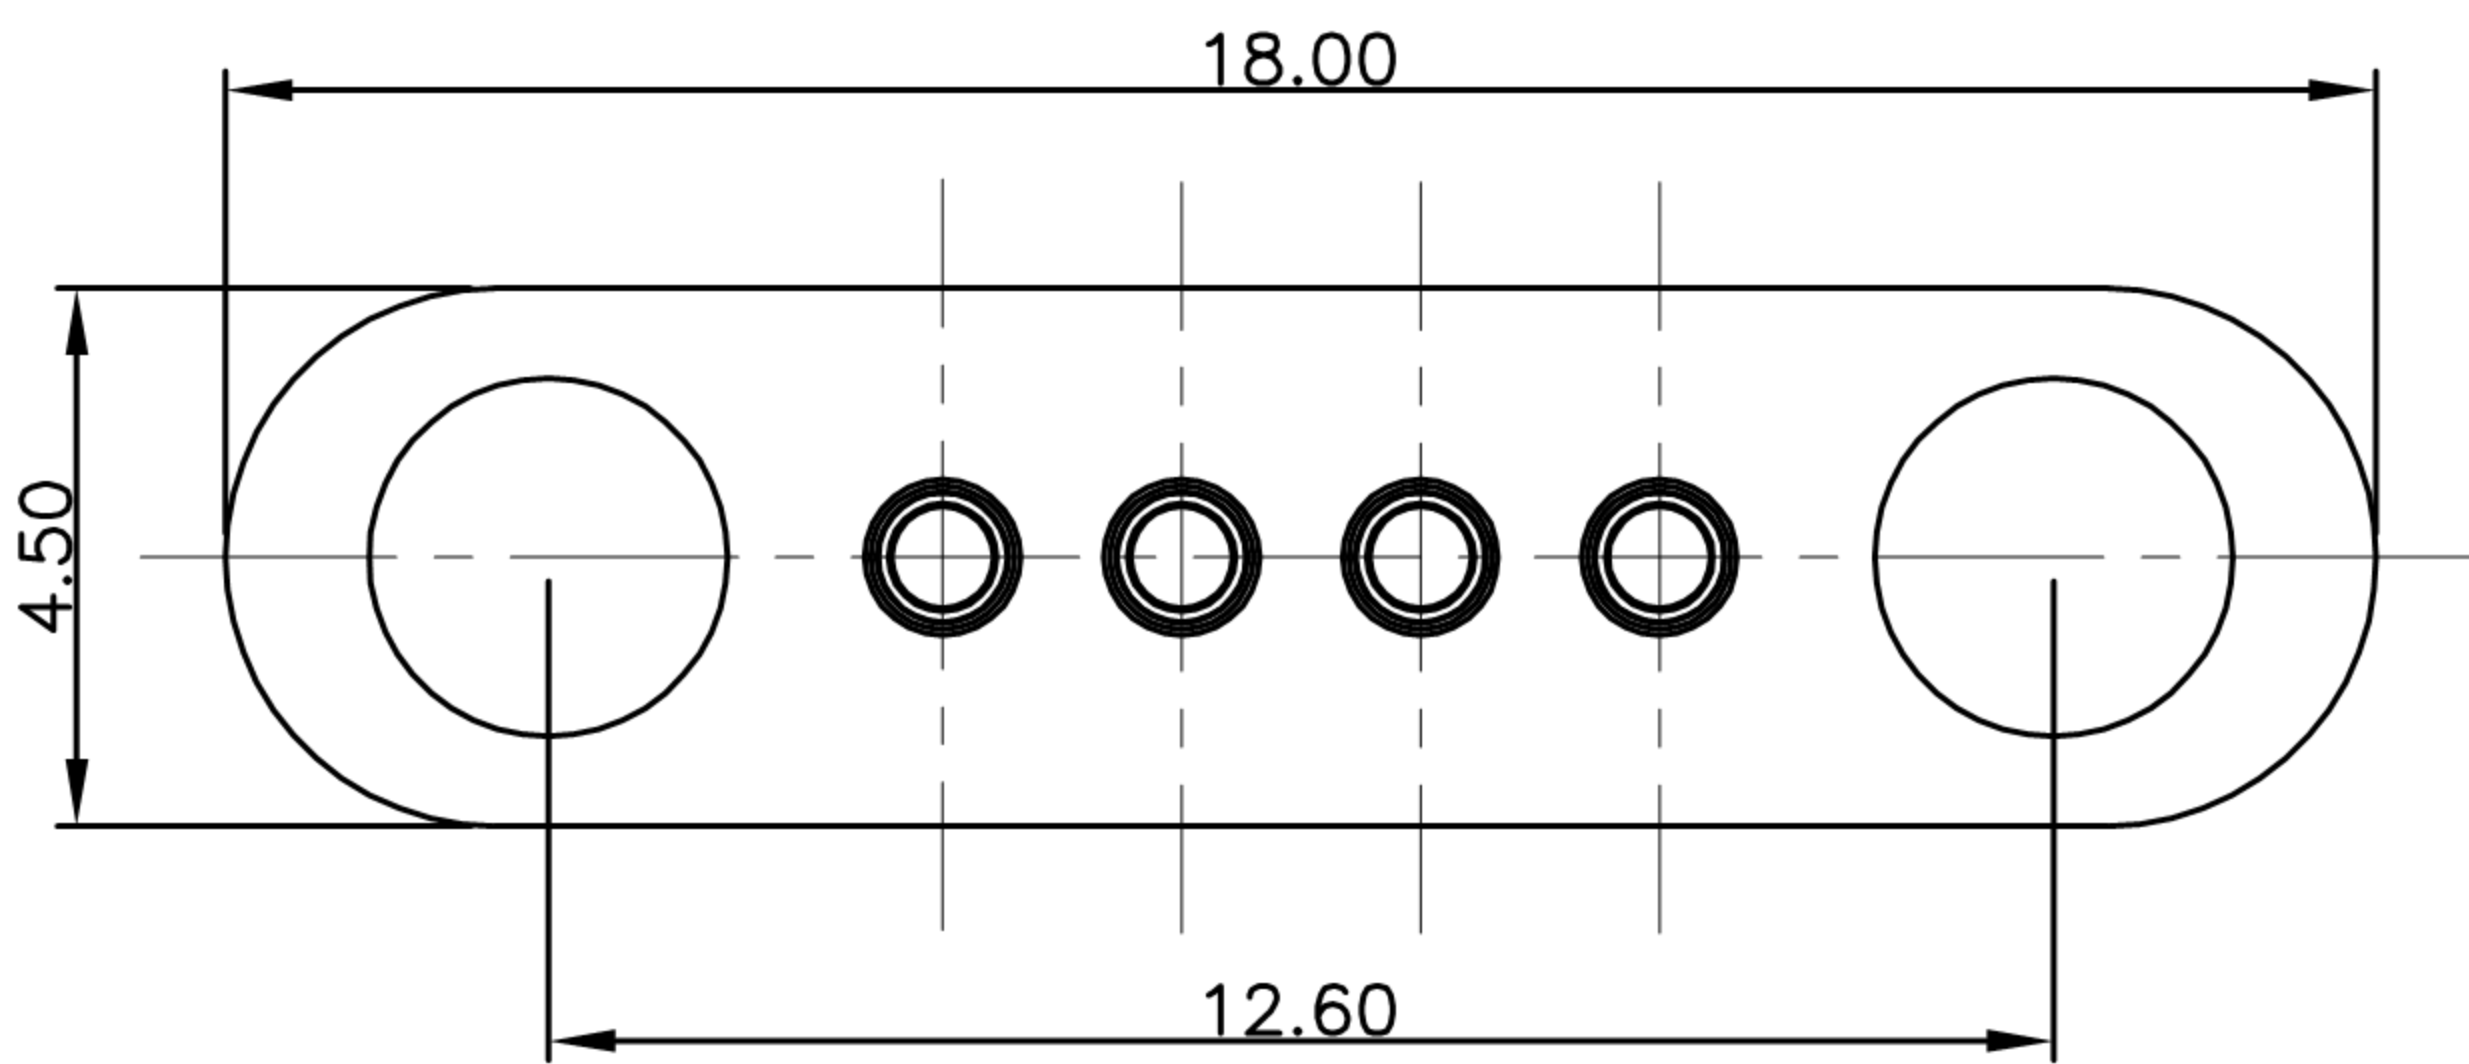

东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONI CS CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED :		Up to 5 Above 5 ~ 15 Above 15 ~ 30 Above 30 ~ 50 Angle	± 0.2 ± 0.3 ± 0.4 ± 0.5 $\pm 0.3^{\circ}$	3RD. ANGEL'S		UNITS	MM
-------------------------------------	--	--	---	-----------------	---	-------	----

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	04/01/21				
CHECKED BY:	DATE	FINISH		MODLE	POGO PIN
Jacky Chen	04/01/21				
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	XB-PGC-CT-M-400G
		SHEET NO.	1 of 1	PART NO.	Magnetic PoGo Pin

SIZE
A4
VER
R