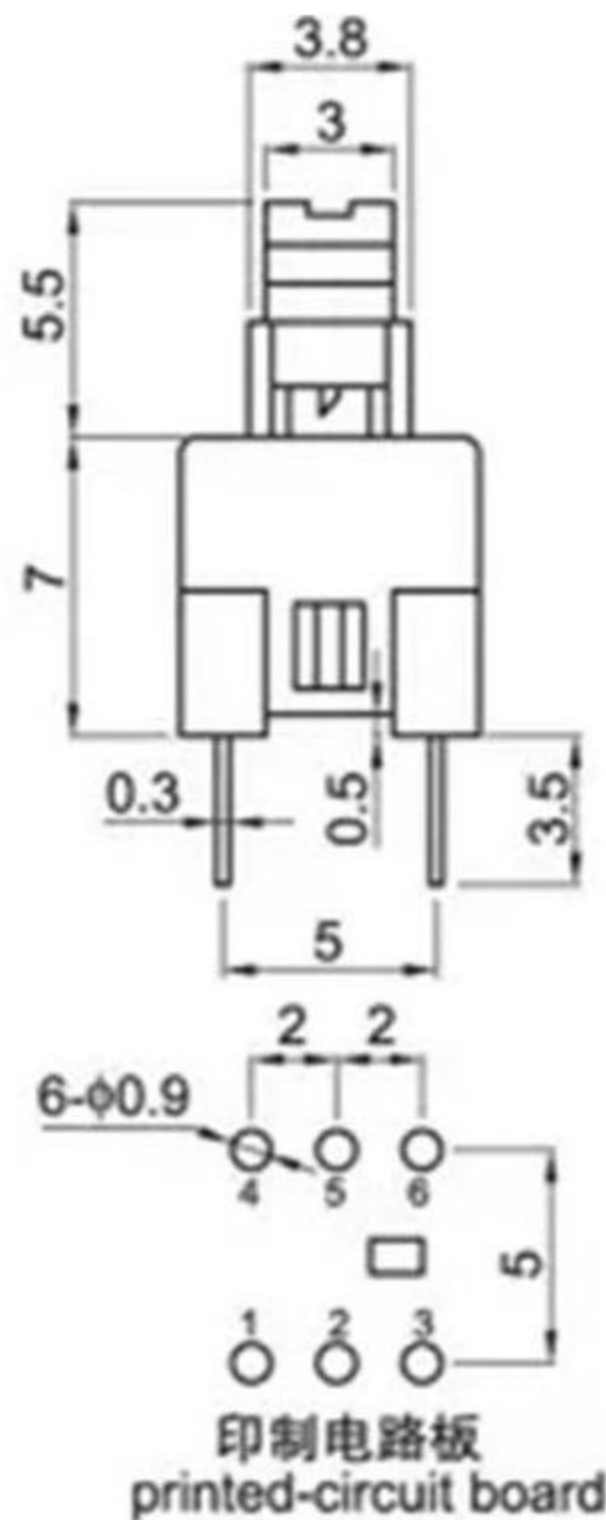
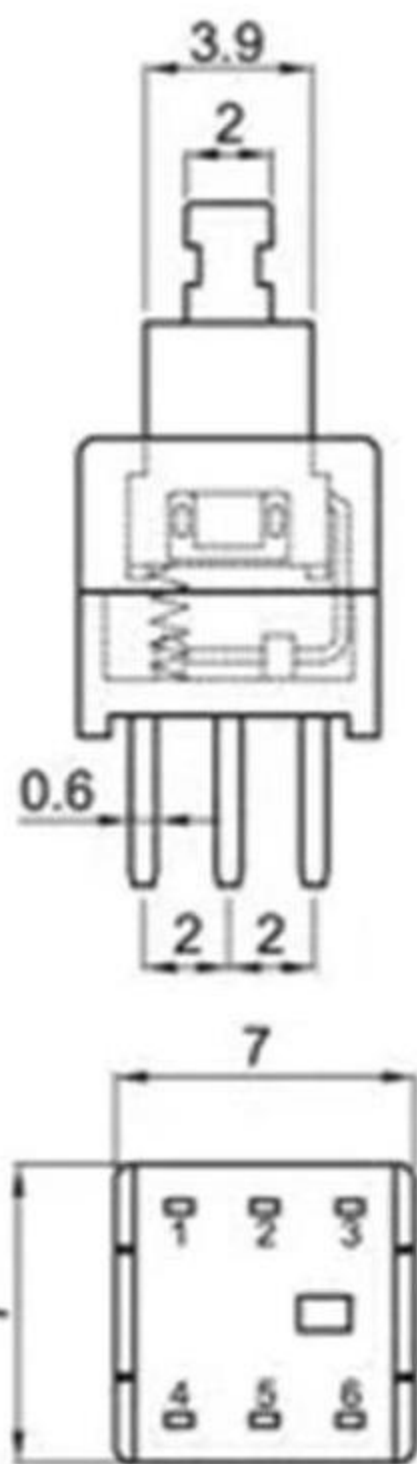


- (1) LIFE TEST: 10000 cycles at a speed of 15-18 cycles
- (2) CONTACT RESISTANCE: 100 mΩ max
- (3) INSULATION RESISTANCE: 100 MΩ min
- (4) DIELECTRIC STRENGTH: 250V AC FOR 1 MIN
- (5) OPERATING TEMPERATURE: -16°C - +60°C
- (6) RATING: 0.1A 30V DC
- (7) FUNCTION: 2P2T
- (8) TIMING: NON-SHORTING
- (9) OPERATING FORCE: 180gf ± 50gf

8					TOLERANCE							
7					UNLESS SPECIFIED							
6					WITHIN 1.5mm : ±0.1mm		A	2016-10-14	初 版			
5	SPRING	SUS304	1	NATURAL	OVER 1.5mm : ±0.2mm		ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.	
4	CAM STICK	SUS304	1	NATURAL	TITLE : VERTICAL PUSH SWITCH				UNIT : mm	DRWG NO.:		
3	CASE	PA66/BRASS STRIP	1	GREY/Ag PLATED	MODEL:				SCALE: 5:1	DWN.		2016-10-14
2	COVER	PA66+15%F.G	1	BLACK	 东莞市溪榜电子有限公司				CHK'D		2016-10-14	
1	KNOB	PA66+15%F.G/PBS STRIP	1	BLACK/Ag CLAD					APPD.			
NO.	PARTS	MATERIALS	Q'TY									