
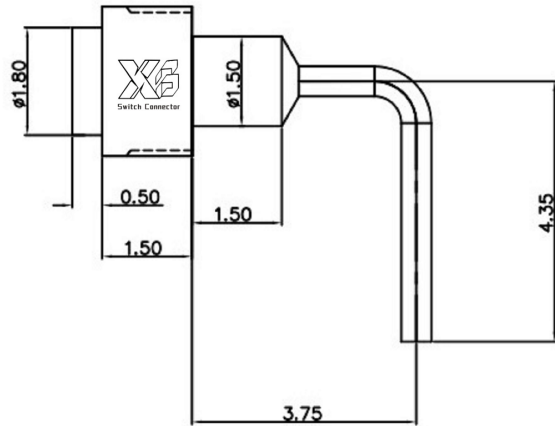


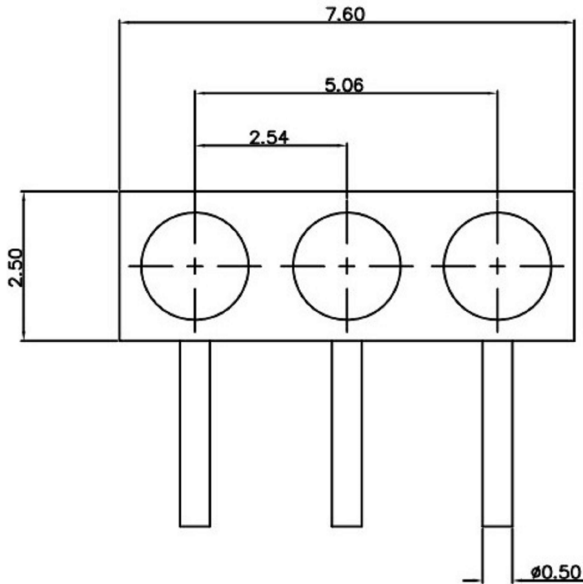

- NOTE
- 1.Material
Plunger: Brass
Barrel: Brass
Spring: SUS
Housing: PA46
 - 2.Plating
Plunger: Au over NI
Barrel: Au over NI
 - 3.Electrical
Rated current & voltage: DC 12V; 2.0A Max.
 - 4.Mechanical
Spring force: 60g±20% at normal working height
Durability: 10,000 cycles(minimum)
 - 5.To ensure the best usage,please operateit based on the working height Based on the engineering drawings,shall not exceed the maximum allowed compression
 - 6.To avoid arcing issue, The adaptor startto power supply after connector mated fully.

图为焊盘位置和大小

				 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD. TOLERANCE UNLESS OTHERWISE STATED Up to 5 ± 0.2 Above 5 ~ 15 ± 0.3 Above 15 ~ 30 ± 0.4 Above 30 ~ 50 ± 0.5 Angle ± 0.5 3RD. ANGEL'S  UNITS MM	DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR	SIZE	
				CHECKED BY:	DATE	FINISH	MODLE	POGO PIN			
				Jacky Chen	04/01/21	SCALE	1 : 1	DWG NO.	XB-PGC-W-254-3P-M	A4	
				APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	Thimble Connector	VER R	
				Tony Kao	04/01/21						
ITEM NO.	DESCRIPTION	DRAWN	DATE								
A		B		C	D	E	F	G	H	I	J