



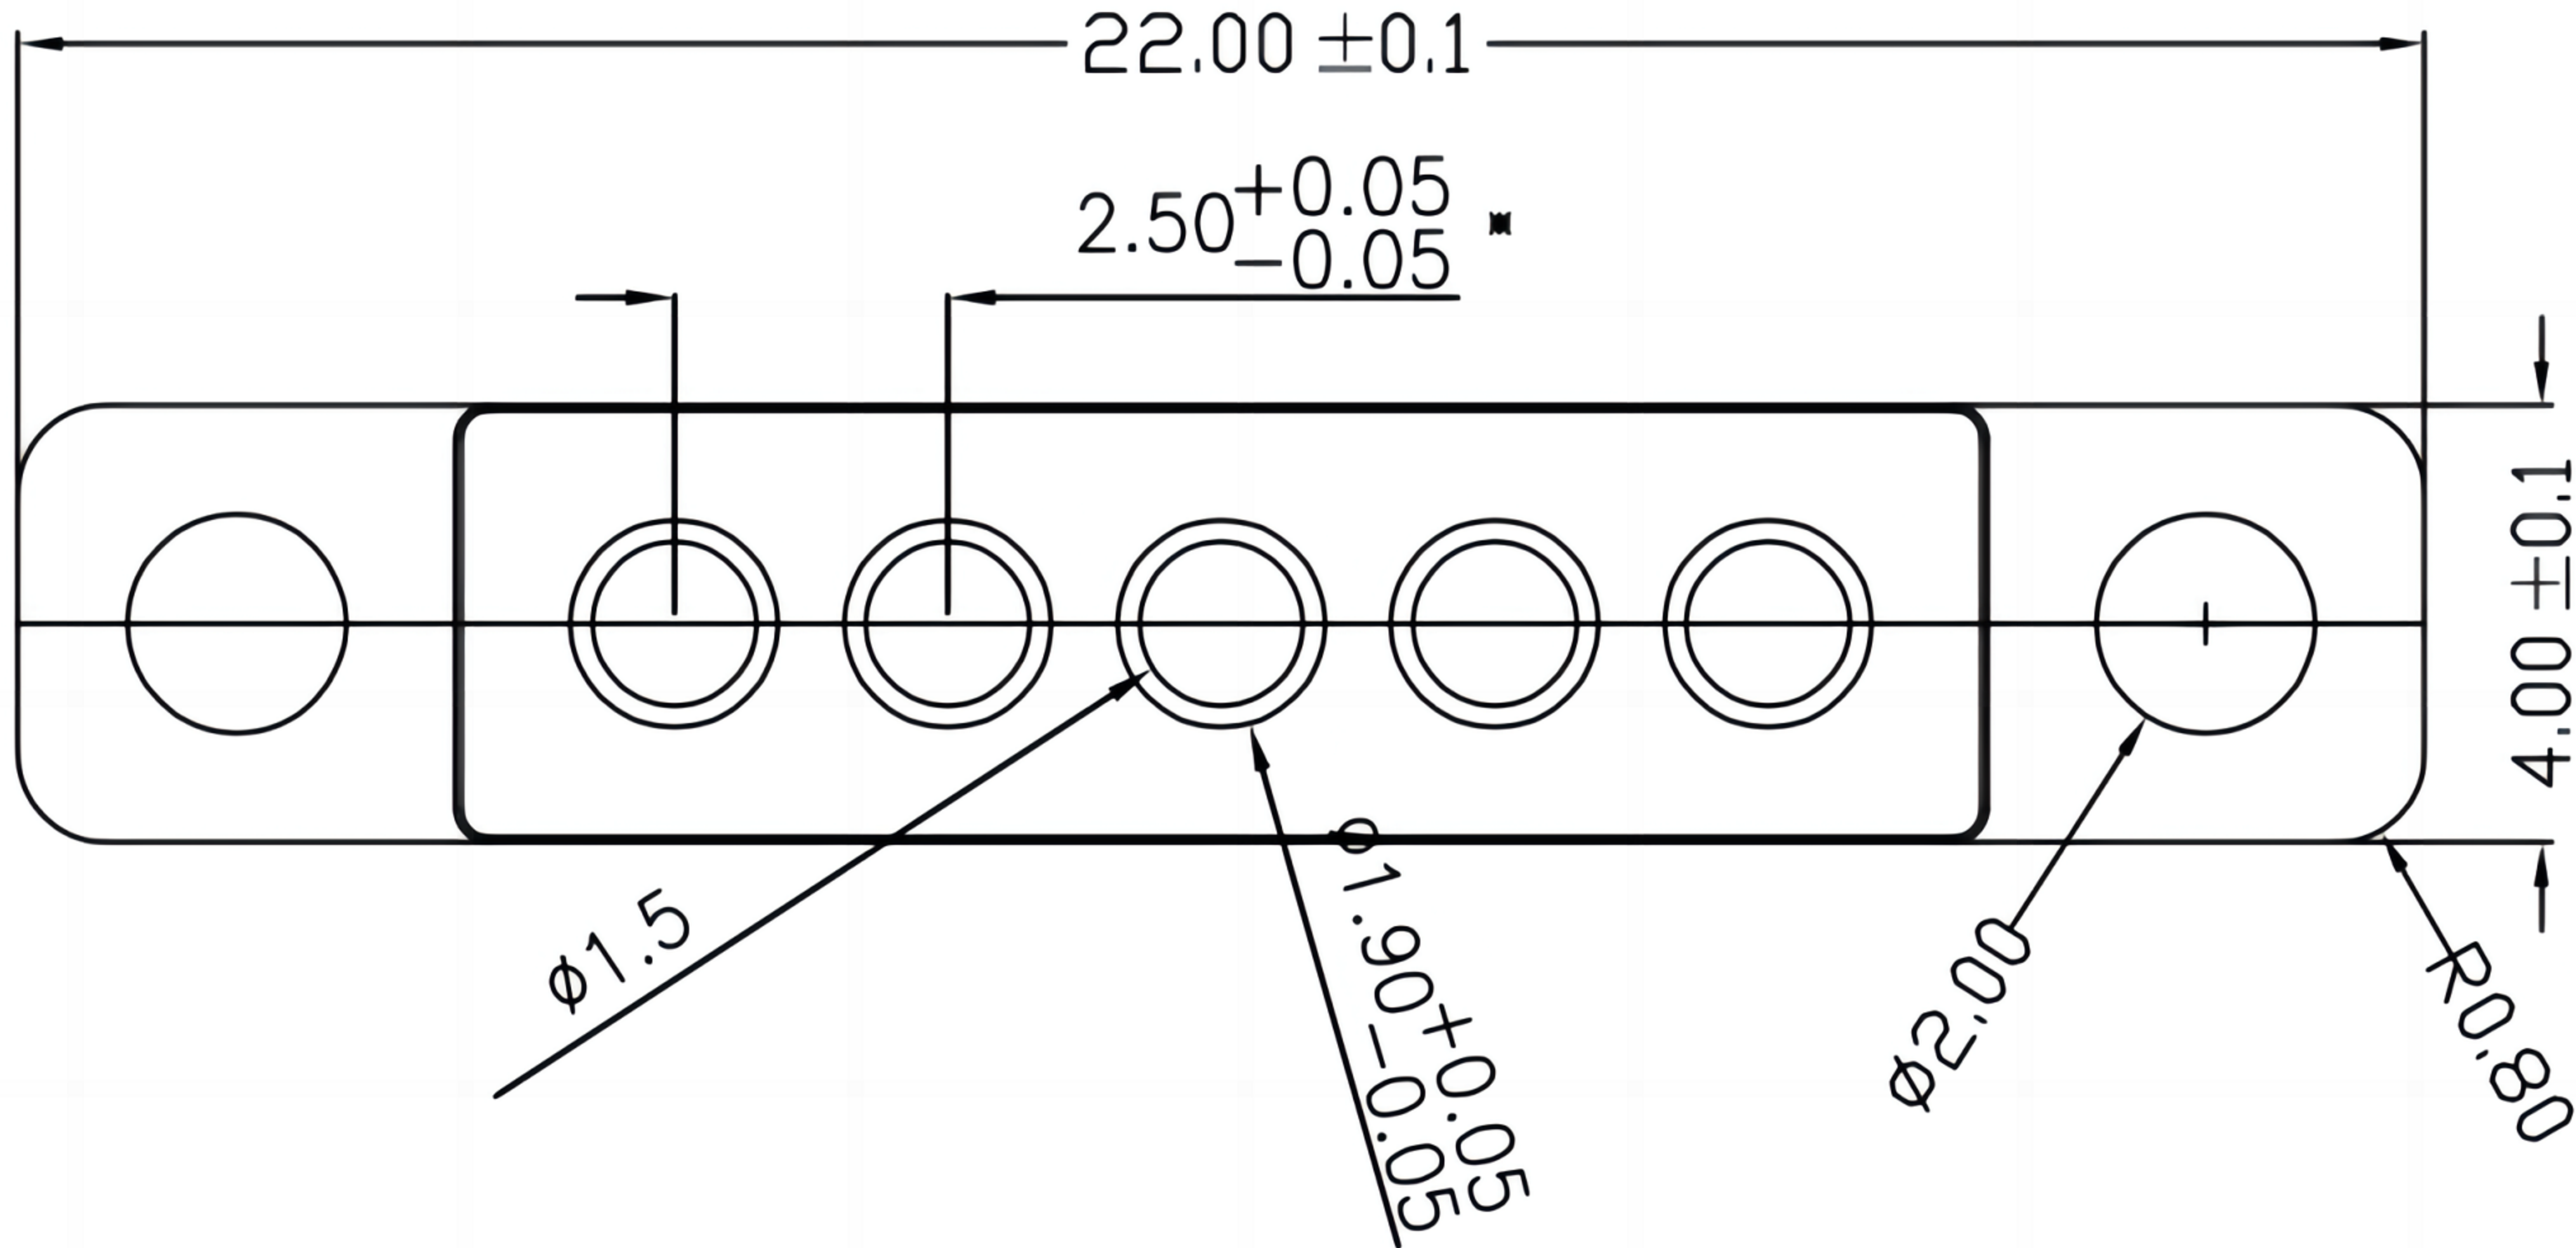

技术要求:

- 1: 材质和电镀
铜柱: 黄铜C3604, 镀镍50-100 μ "镀金2 μ "
- 2: 电气性能
工作电流12V/3A
接触阻抗: 80mΩ MAX在正常工作时
- 3: 机械性能
机械寿命测试10000次
- 4: 工作环境: 耐温260℃, 工作温度-40℃~85℃
- 5: 盐雾测试: 5%盐溶液24小时无锈蚀
- 6: 焊锡测试: 245±5℃湿焊覆盖率95%以上

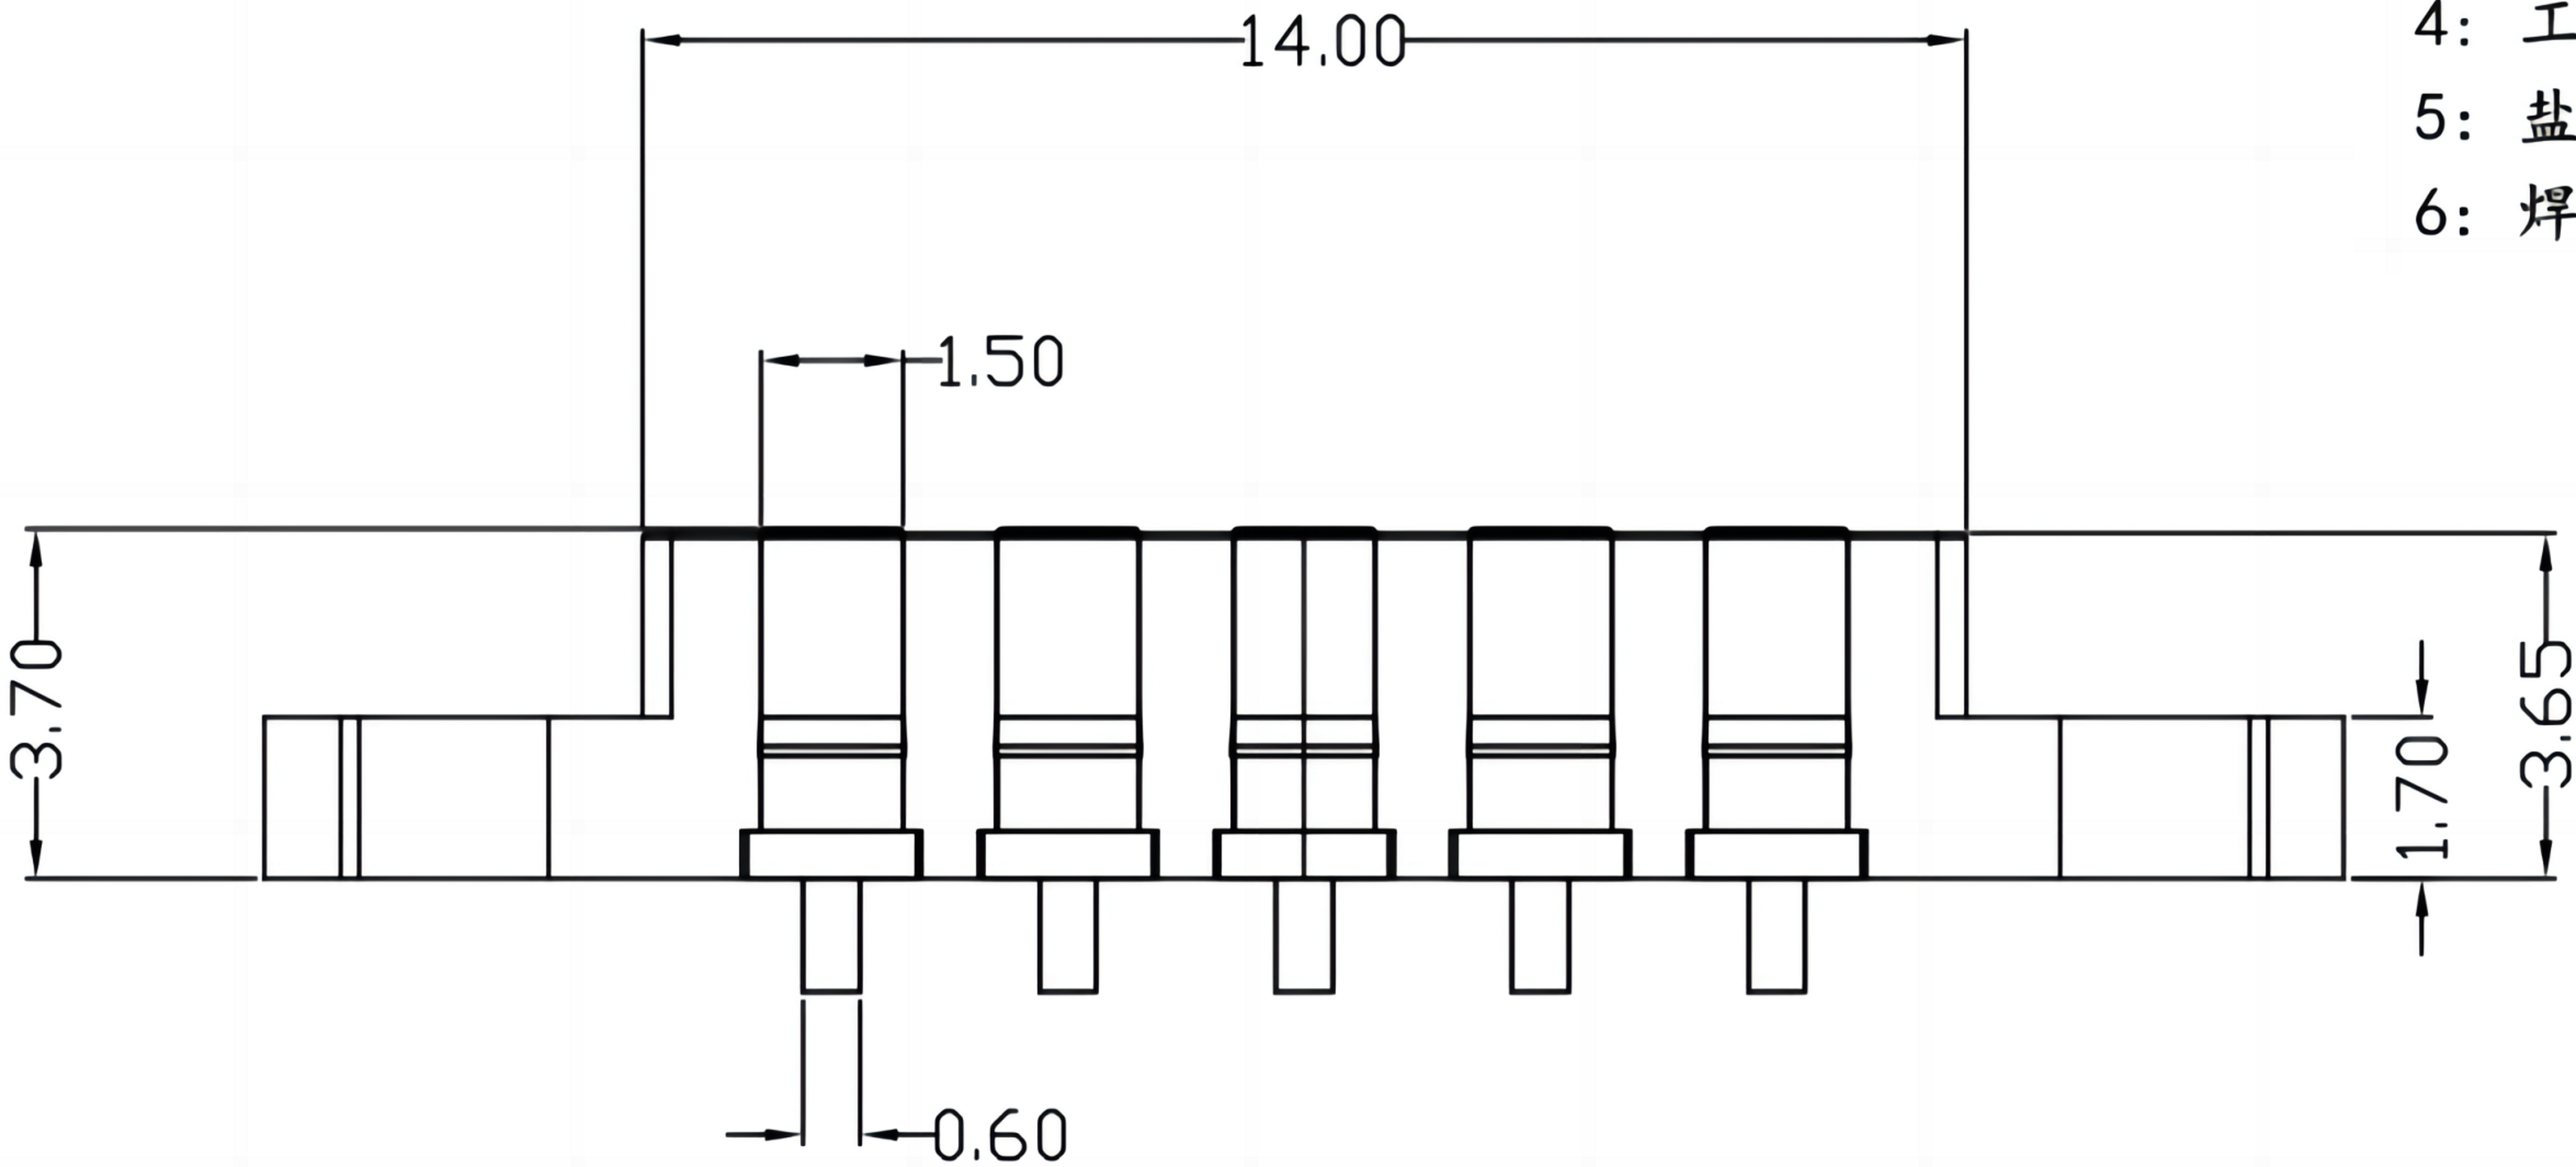

				Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	DRAWN BY: Jack Lu		DATE 04/01/21	MAT'L		TITLE	CONNECTOR	
					CHECKED BY: Jacky Chen		DATE 04/01/21	FINISH		MODLE	POGO PIN	
					APPROVED BY: Tony Kao		DATE 04/01/21	SCALE	1 : 1	DWG NO.	XB-PG-CT-250-5P-G	SIZE A4
								SHEET NO.	1 of 1	PART NO.	Magnetic PoGo Pin	VER R
ITEM NO.	DESCRIPTION	DRAWN	DATE		TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ± 0.2 Above 5 ~ 15 ± 0.3 Above 15 ~ 30 ± 0.4 Above 30 ~ 50 ± 0.5 Angle ± 0.3°	3RD. ANGEL'S		UNITS	MM		