



ROHS



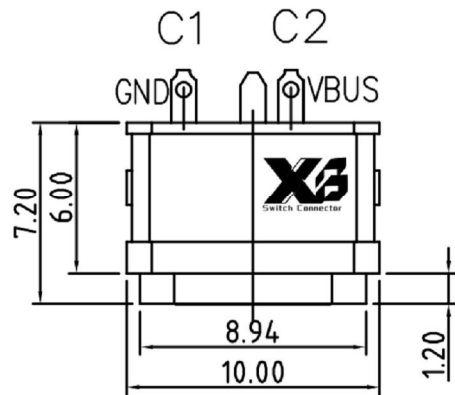


INTERFACE(FRONT VIEW)

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
			VBUS								
GND	B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2


PIN ASSIGNMENT

PIN NO.	A12&B12	A4&B4
SIGNAL NAME	GND	VBUS
PCB PAD NO.	C1	C2

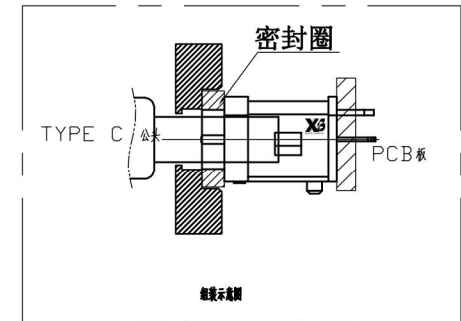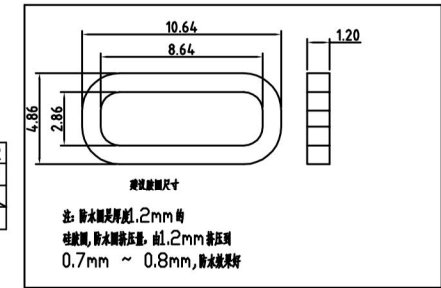

RECOMMENDED PCB LAYOUT(TOP VIEW)

THICKNESS T=1.0mm
DEFAULT TOLERANCE+/-0.05

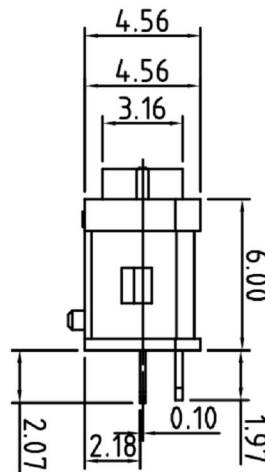

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:5000 CYCLES


5	Shell2	1	SUS304 Ni Plating T=0.20mm	Ni40~120u'
4	Shell1	1	SUS304 Ni Plating T=0.3mm	Ni40~120u'
3	Housing2	1	LCP(G.F30%)	
2	Contact	4	Phosphor bronze C5210R-EH Au/Ni Plating T=0.20mm	Ni40~160u' AuCONTACT AREA:3u' OTHER AREA:G/F
1	Housing	1	PA9T (G.F30%)	
ITEM	PARTNAME	Q'TY	FINISH	NOTE

X.	±0.50	X.*	±2°	UNITS	mm
.X	±0.30	.X.*	±1°		
.XX	±0.10	.XX.*	±0.5°	MAT'L	
.XXX	±0.05				
				FINISH	
				Q'TY	



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

PART NO.	XB-USB-C-3P-1125-IPX7	TITLE:	2PIN TYPE C
APPD:	GAO. PENG	DWG NO.:	XB-USB-C-3P-1125-IPX7
CHKD:	HE. LONG. FEI		
MARK			
DR:	PANG. DONG		



SCALE	SHEET	REV.
1/1	1/2	A1