
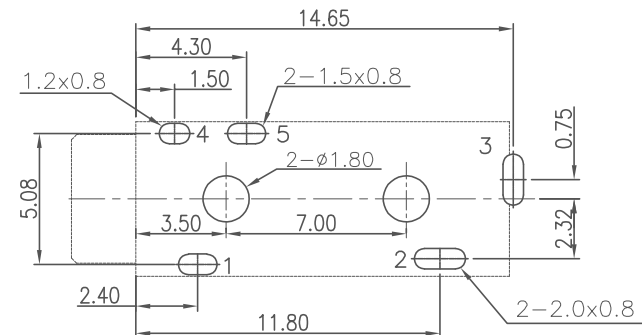
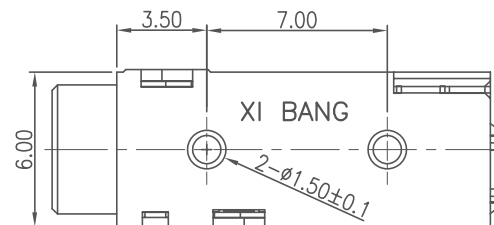
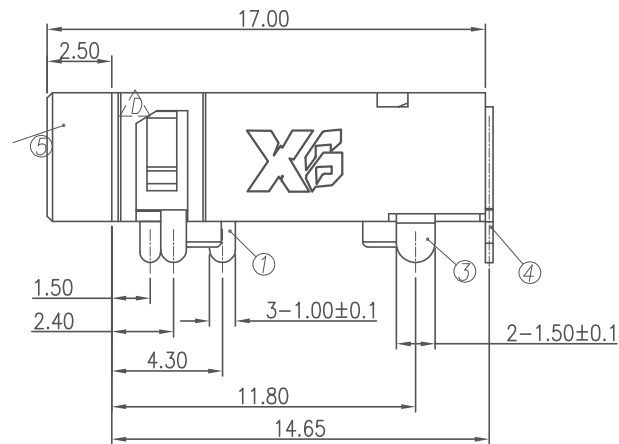


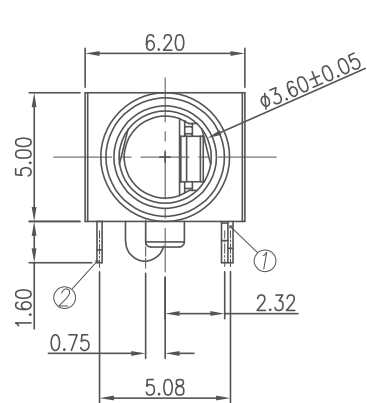

PCB LAYOUT TOP VIEW
TOLERANCES: ± 0.05

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:

1-1. RATING: 20V, 1A Min.

1-2. CONTACT RESISTANCE:

50 MILLIOHMS Max. FOR INITIAL,
80 MILLIOHMS Max. AFTER 5000 CYCLES.

1-3. INSULATION RESISTANCE: 100 MEGAOHMS Min.
BY 500V DC AFTER 1 MINUTE.



1-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V
RMS AFTER 1 MINUTE.

2. MECHANICAL CHARACTERISTICS:

2-1. INSERTION FORCE : 0.3~3.0 KGF(2.94~29.4N)

2-2. WITHDRAWAL FORCE : 0.3~3.0 KGF(2.94~29.4N)

3. LIFE TEST: 5,000 CYCLES MIN.

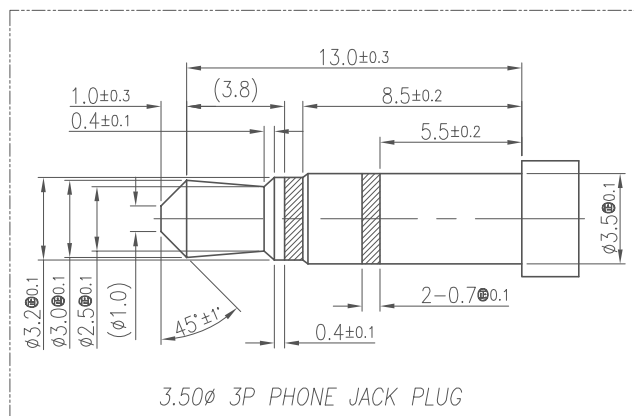

⑤	HOUSING	1	PA10T	Black
④	TERMINAL 4#	1	C2680 t=0.30	GOLD FLASH
③	TERMINAL 3#	1	C2680 t=0.25	GOLD FLASH
②	TERMINAL 2#	1	C5210 t=0.20	GOLD FLASH
①	TERMINAL 1#	2	C5210 t=0.20	GOLD FLASH

UNLESS OTHERWISE
SPECIFIED TOLERANCES

XI BANG 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:	ANGLES:	DESIGN:	Gao.Peng 2020.9.15	PART NAME: Ø3.5mm Audio Jack
DIM TOL	DIM TOL	CHECK:		PART NO. XB-PJ-03505-0940-00000H
X. ±0.50	X. ±2°			SHEET: 1/1 REV.: A1
X.X ±0.30	X.X ±1°			DRAWING NO
X.XX ±0.20	X.XX			
X.XXX ±0.10	X.XXX			
UNIT: mm	APPROVED	He.Long.Fei 2020.9.15		

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

8

7

6

5

4

3

2

1