
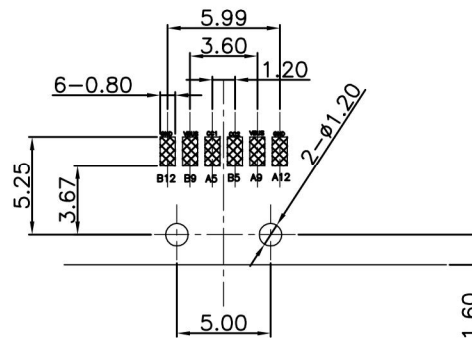
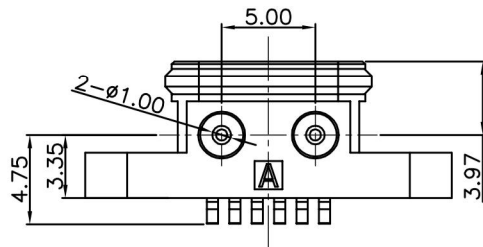
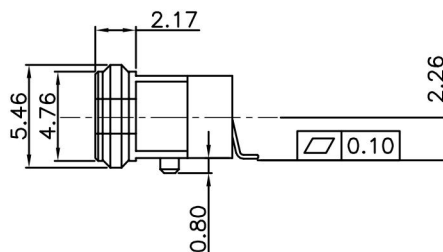
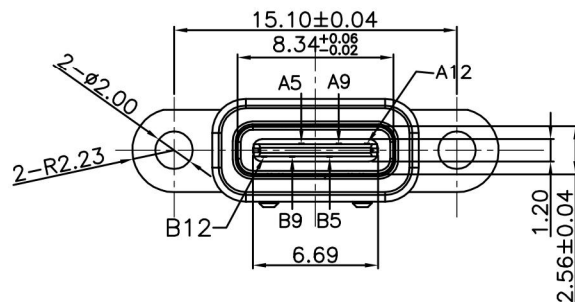
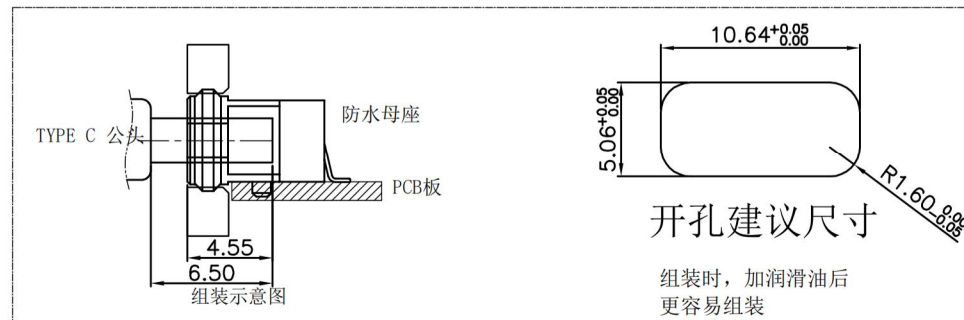
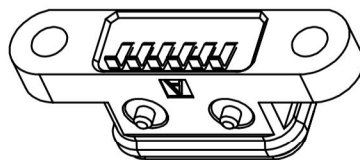


ROHS

REV.	ECN. NO.	APPD.

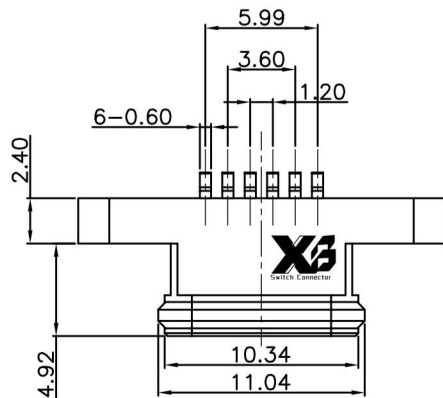

Recommended P.C.B. Layout
Unspecified tolerance: ±0.05
(Top view)


- NOTES:
SPECIFICATION:
1. CURRENT RATING: 3.0A MAX
 2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 6. INSERTION FORCE : 5N~20N
 7. UNMATING FORCE: 8N~20N
 8. DURABILITY:5,000 CYCLES

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

ITEM	PART NAME	Q' TY	FINISH	NOTE
4	Shell1	1	SUS301 Ni Plating T=0.25mm	Ni:40~120u";
3	Housing2	1	LCP(G.F30%)	
2	Contact	5	Phosphor bronze C5210R-EH Au/Ni Plating T=0.20mm	Ni:40~160u"; Au:CONTACT AREA:3u", OTHER AREA:G/F
1	Housing	1	PA9T (G.F30%)	

X.	±0.50	X.°	±2°
.X	±0.30	.X°	±1°
.XX	±0.10	.XX°	±0.5°
.XXX	±0.05		

UNITS	mm
MAT' L	
FINISH	
Q' TY	

 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD		PART NO. XB-USB-C-6P-1132-IPX7	TITLE: TYPE C 6Pin SMT Type
APPD:	GAO. PENG	DWG NO. : XB-USB-C-6P-1132-IPX7	
CHKD:	HE. LONG. FEI		
DR:	PANG. DONG		
		SCALE	SHEET
		1/1	1/2
		REV.	A1