
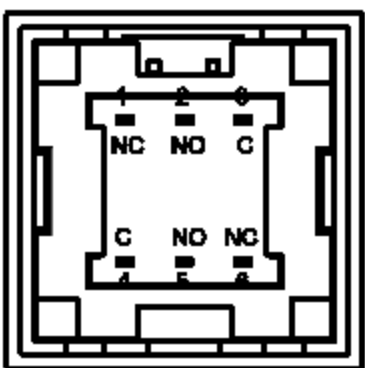
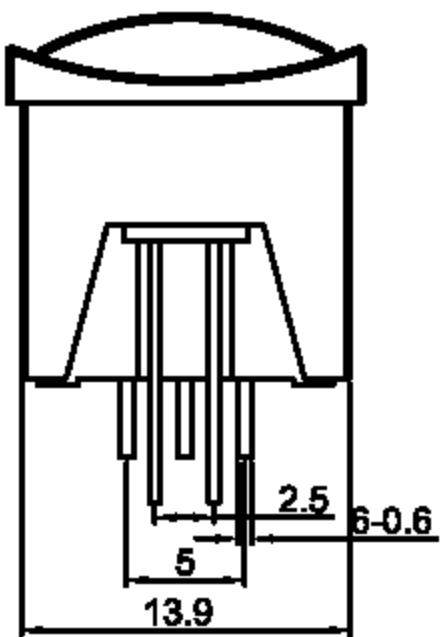
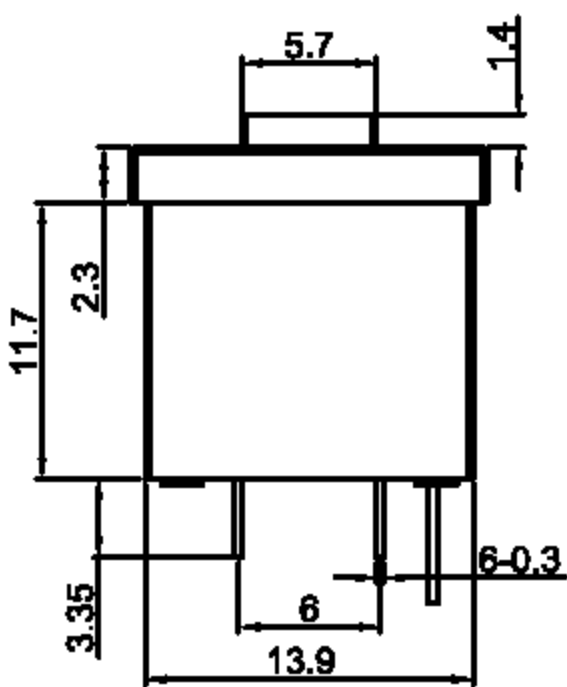
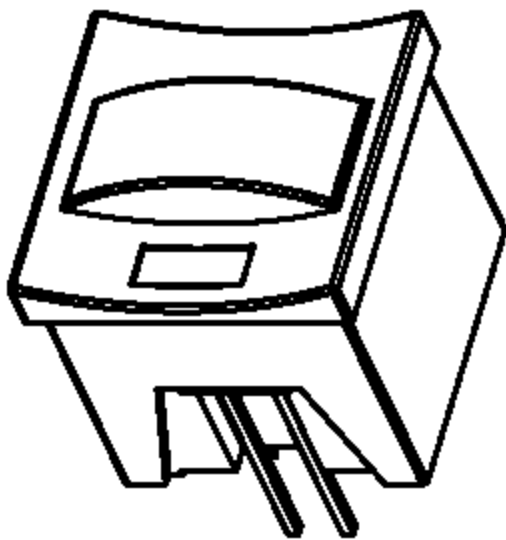


东莞市溪榜电子有限

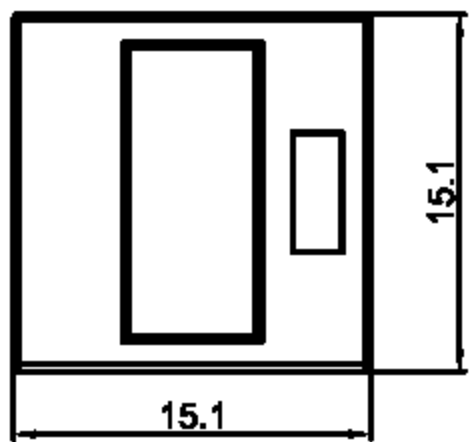



BOTTOM VIEW

Rating: 100mA 30VDC ;
Contact Resistance: 100mΩ Max. ;
Insulation Resistance:DC 500V 100MΩ Min. ;
Dielectric Strength:AC 250V 1 minute
Total Travel: 2.5±0.5mm
Operating Force:200±100gf
Mechanical Life: Over 50,000 cycles
Electrical Life: Over 10,000 cycles
Operating Temperature:-20°C~70°C
Manual welding:350°C for 3 Seconds


MATERIAL:

Outer Frame:ABS;
Base:ABS ;
Actuator:ABS
Terminal: Brass,Silver or Tin plated .

Contact Configuration

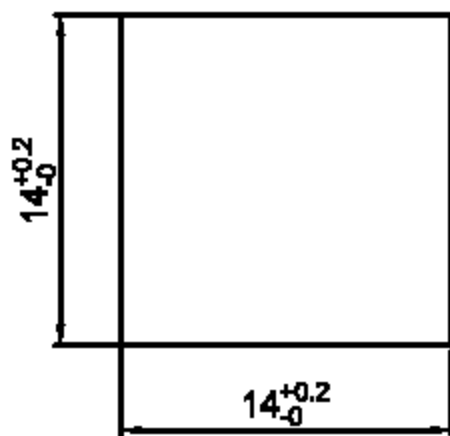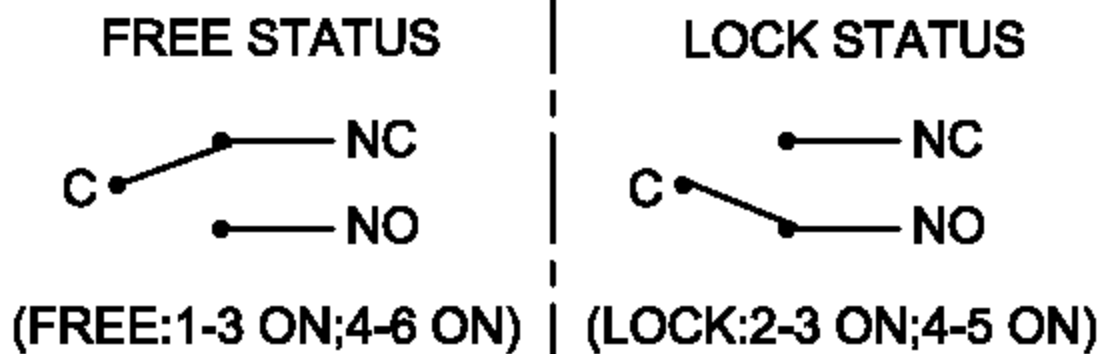

PANEL HOLE

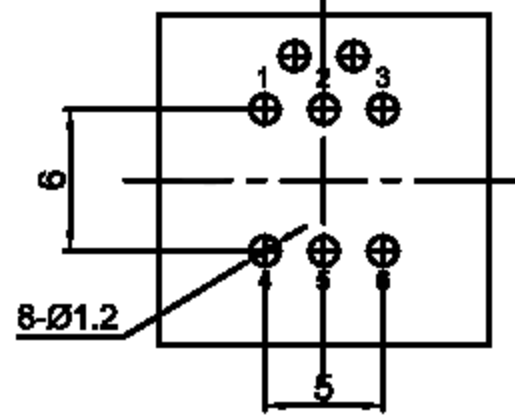

PCB HOLE(BOTTOM VIEW)

Y	Yellow	黄色
W	White	白色
U	Blue	蓝色
R	Red	红色
G	Green	绿色
B	Black	黑色
A	Gray	灰色
CAP COLOR (X)		

Note:

- 1.This product is strictly prohibited wave soldering and reflow soldering,please use the manual welding processing, temperature of 350°±5°and time is 3±0.5 seconds;
- 2.After the product is welded on the PCB board,it is prohibited to use any solvent to clean the PCB board,and avoid the influence of the inner product.

				公差 TOLERANCES		.X± 0.3 .XX± 0.15		角度 ANGLE± 1°		单位 DIMENSION UNIT		mm.	
				视角	比例尺	NONE		日期	2016.10.07	品名	TITLE	图号	DRAWING NO
A1	增加产品焊锡说明	2016.10.07	N/A	VIEWING ANGLE	SCALE			DATE					
A0	New Issue	2011.12.08	N/A	核准	核对	Sinc		绘图	姜庆勇				
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	Richard	CHECKED BY		DRAWN BY					