
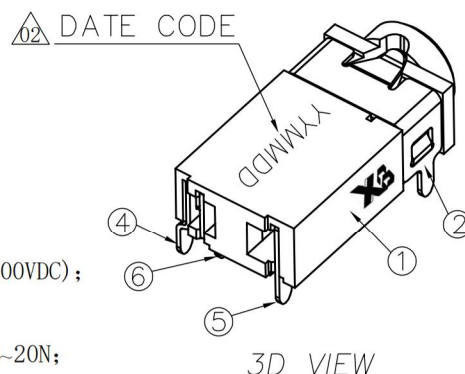
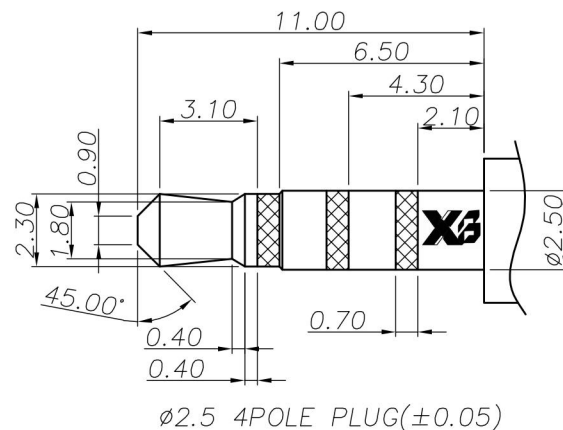
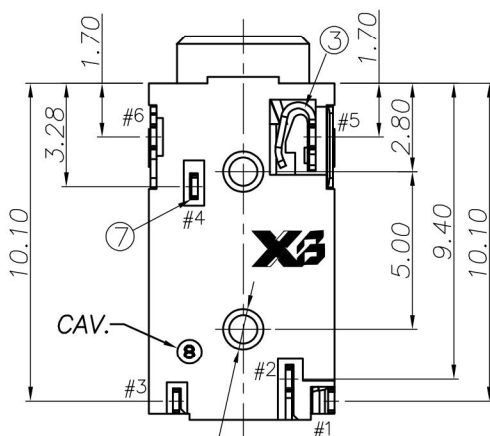

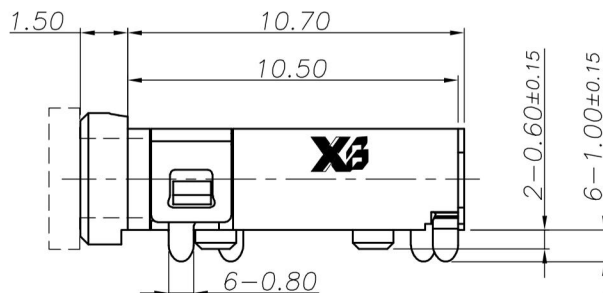


ROHS

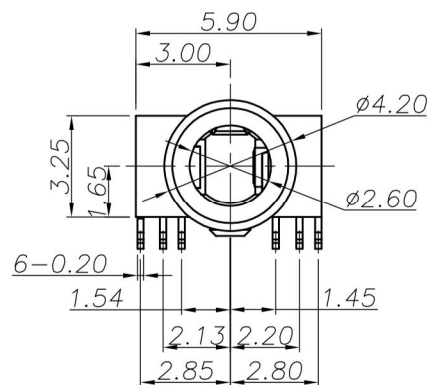

Specification:


1. Rating : DC12V/1A;
2. Contact resistance: $\leq 30\text{m}\Omega$;
After test: $\leq 50\text{m}\Omega$
3. Insulation resistance: $\geq 100\text{M}\Omega$ (500VDC);
After test: $\geq 50\text{M}\Omega$
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3N~20N;
6. life test: 5000cycles min;
7. Operation temperature range: -20℃~70℃
8. Preservation temperature range: -40℃~85℃

Ordering information:


XB-PJ2083A-I 9T 0A G OH □

- (1): Series No
- (2): Schematic option: I
- (3): Material of housing: 9T=PA9T
- (4): Housing color: 0A=Black
- (5): Terminal plating: G=Gold Flash
- (6): Special option:
OH=Halogen Free
- (7): Packing mode:

- A=Tape/reel packing (Tape Wide Size=24mm)
B=Tape/reel packing (Tape W=32mm, P=12mm)
C=Tape/reel packing (Tape W=32mm, P=16mm)

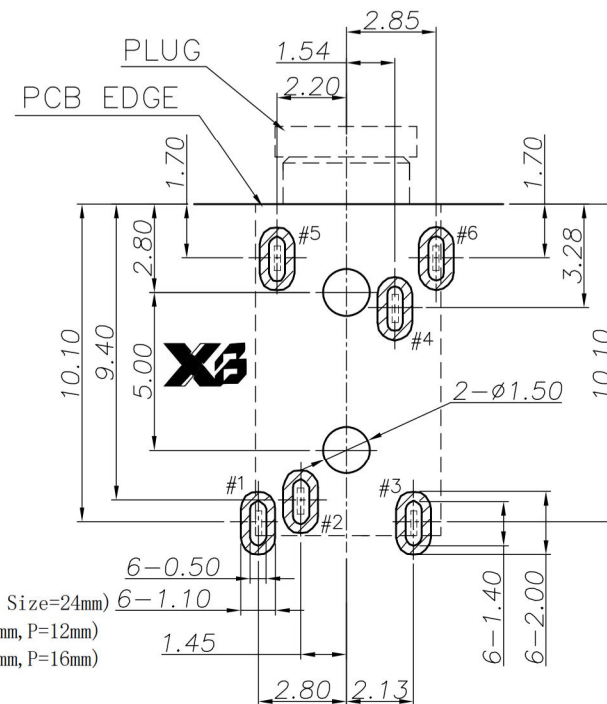

PCB HOLES(TOP VIEW) t=1.6mm
NOTE: GENERAL TOLERANCE: $\pm 0.05\text{mm}$



SCHEMATIC

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
7	SHUNT-2 #4	1	Brass 0.2t	Ni:40u" Min,Au:1u" Min
6	SHUNT-1 #2	1	Brass 0.2t	Ni:40u" Min,Au:1u" Min
5	TIP #3	1	Phosphor Bronze 0.2t	Ni:40u" Min,Au:1u" Min
4	RING-B #1	1	Phosphor Bronze 0.2t	Ni:40u" Min,Au:1u" Min
3	RING-A #5	1	Phosphor Bronze 0.2t	Ni:40u" Min,Au:1u" Min
2	EARTH #6	1	Phosphor Bronze 0.2t	Ni:40u" Min,Au:1u" Min
1	HOUSING	1	PA9T UL94V-0	Black

THIS DOCUMENT IS THE SOLE PROPERTY OF XI BANG ELECTRONICS CO., LTD. AND SHOULD NOT BE USED IN WHOLE OR INPART WITHOUT PRIOR WRITTEN PERMISSION.	UNIT:MM 	TOLERANCE		TYPE: Ø2.5 PHONE JACK	MODEL NO: XB-PJ2083A-I9T0AGOH_	DRAWING TYPE: CUSTOMER DRAWING		
		DIMENSIONS	ANGLES		DRAWING No: XB-CR-0000-0***	SCALE: 1:1	VER. : 02	PAGE: 1/1
		.X ±0.50	X ±5°					
		.XX ±0.30	.X ±3°					
			.XXX±0.15	.XX ±2°				
	DESIGNER BY:				 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO.,LTD			
CHECK BY:								
APPROVED BY:								

东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD