


PCB LAYOUT

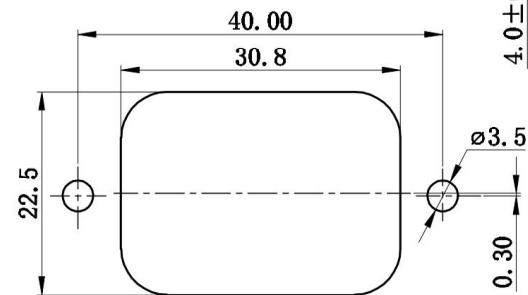

No.	Name	Material	Qty
1	Grounding pin	Brass t2.0	1
2	current-carrying pin	Brass t2.0	2
3	Base	PA66	1

Rating : 10A 250V AC 3C TUV CE KC
 Insert And Extract Force: 1.36kgf~6.8kgf
 Operating Life: ≥5000 cycles
 Withstand Voltage: Between all terminals:2500VAC (50-60Hz)1min
 terminals to Base:3750V AC (50-60Hz)1min
 Leakage Current : 1mA
 Insulation Resistance: ≥100MΩ 500V DC
 Body Materil: NYLON66 94V-0

A4				普通公差		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD							
A3				COMMON TOLERANCE :									
A2				UP TO 5	±0.20	单位	mm	投影		品名	Ac Inlet C14型	比例	Free
A1				ABOVE 5 TO 30	±0.30	UNIT		PROJECTED		PRODUCT NAME		SCALE	
				ABOVE 30	±0.50	绘图	吴瑜	核对		料号	XB-AC-14-1A		
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°	日期	2024.4.7	核准		图号			
						DATE		APPROVAL BY		DWG NO.			