
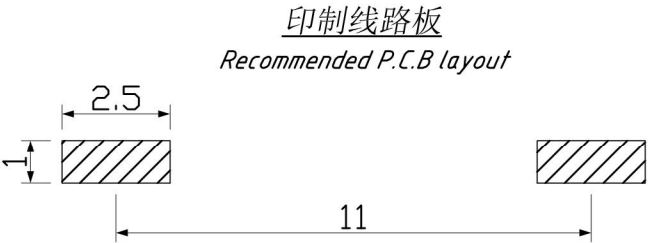
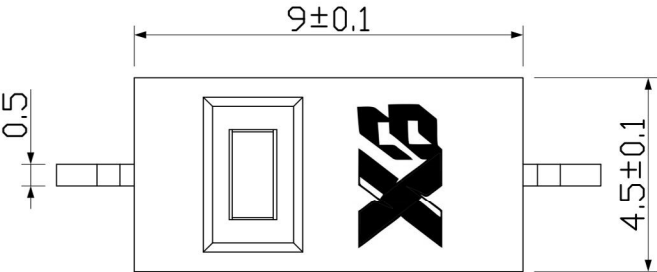
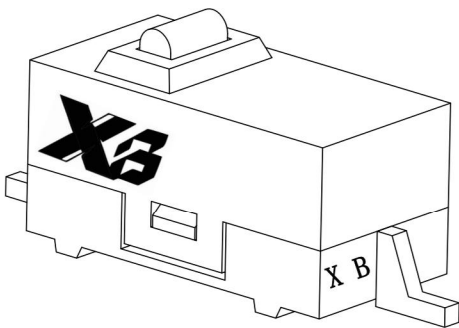





ROHS

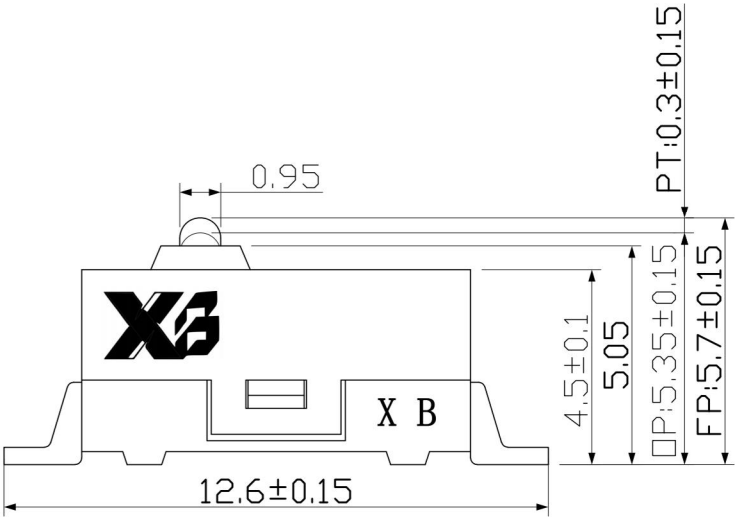

- 1、工作电压 Working Voltage: 30V DC;
- 2、工作电流 Working Current: 0.05A;
- 3、接触电阻 Contact Resistance: $\leq 300m\Omega$;
- 4、绝缘电阻 Inslnation Resistance: $\geq 100M\Omega$;
- 5、动作力 Press Force: $100\pm 20gf$;
- 6、寿命 Life: $\geq 300,0000$ 次。

The material contained in this drawing is the property of XiBang. Any use other than that specifcally authorized by XiBang i5 prohibited. The above drawing IS subjected to change for improvement without prior notice.

6	盖 板	高温尼龙	黑色	----
5	按 柄	高温尼龙	黑色	----
4	触 点	纯银	----	----
3	簧 片	SUS	----	----
2	基 座	高温尼龙	黑色	----
1	端 子	H62Y	----	表面镀银
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD											
TITLE : XB MICRO SWITCH								7	LEVER	SUS	1	NATURE	
MODEL : XB-TM-036-S								6	CONTACT POINT	SILVER	1	NATURE	
UNIT : MM		DWN.	ZENQ. CHEN	DATE	TOLERANCE <= 1.5mm ± 0.1 > 1.5mm ± 0.2 >=10mm ± 0.3	ANGLE TOL ± 2°	5	SPRING PLATE	CuBe	1	NATURE		
SCALE : 5 : 1		CHK'D	PENG. GAO	DATE			4	TERMINAL	BRASS STRIP	3	Ag PLATED		
VERSION		01	APPD.	FEI. LONG. HE			DATE	3	BASE	PBT	1	WHITE	
								2	COVER	PBT	1	BLACK	
								1	BUTTON	POM	1	WHITE	
							NO.	PART NAME	MATERIAL	QTY.	FINISHING		