

F

E

D

C

B

A

F

E


D

C

B

A


123456789

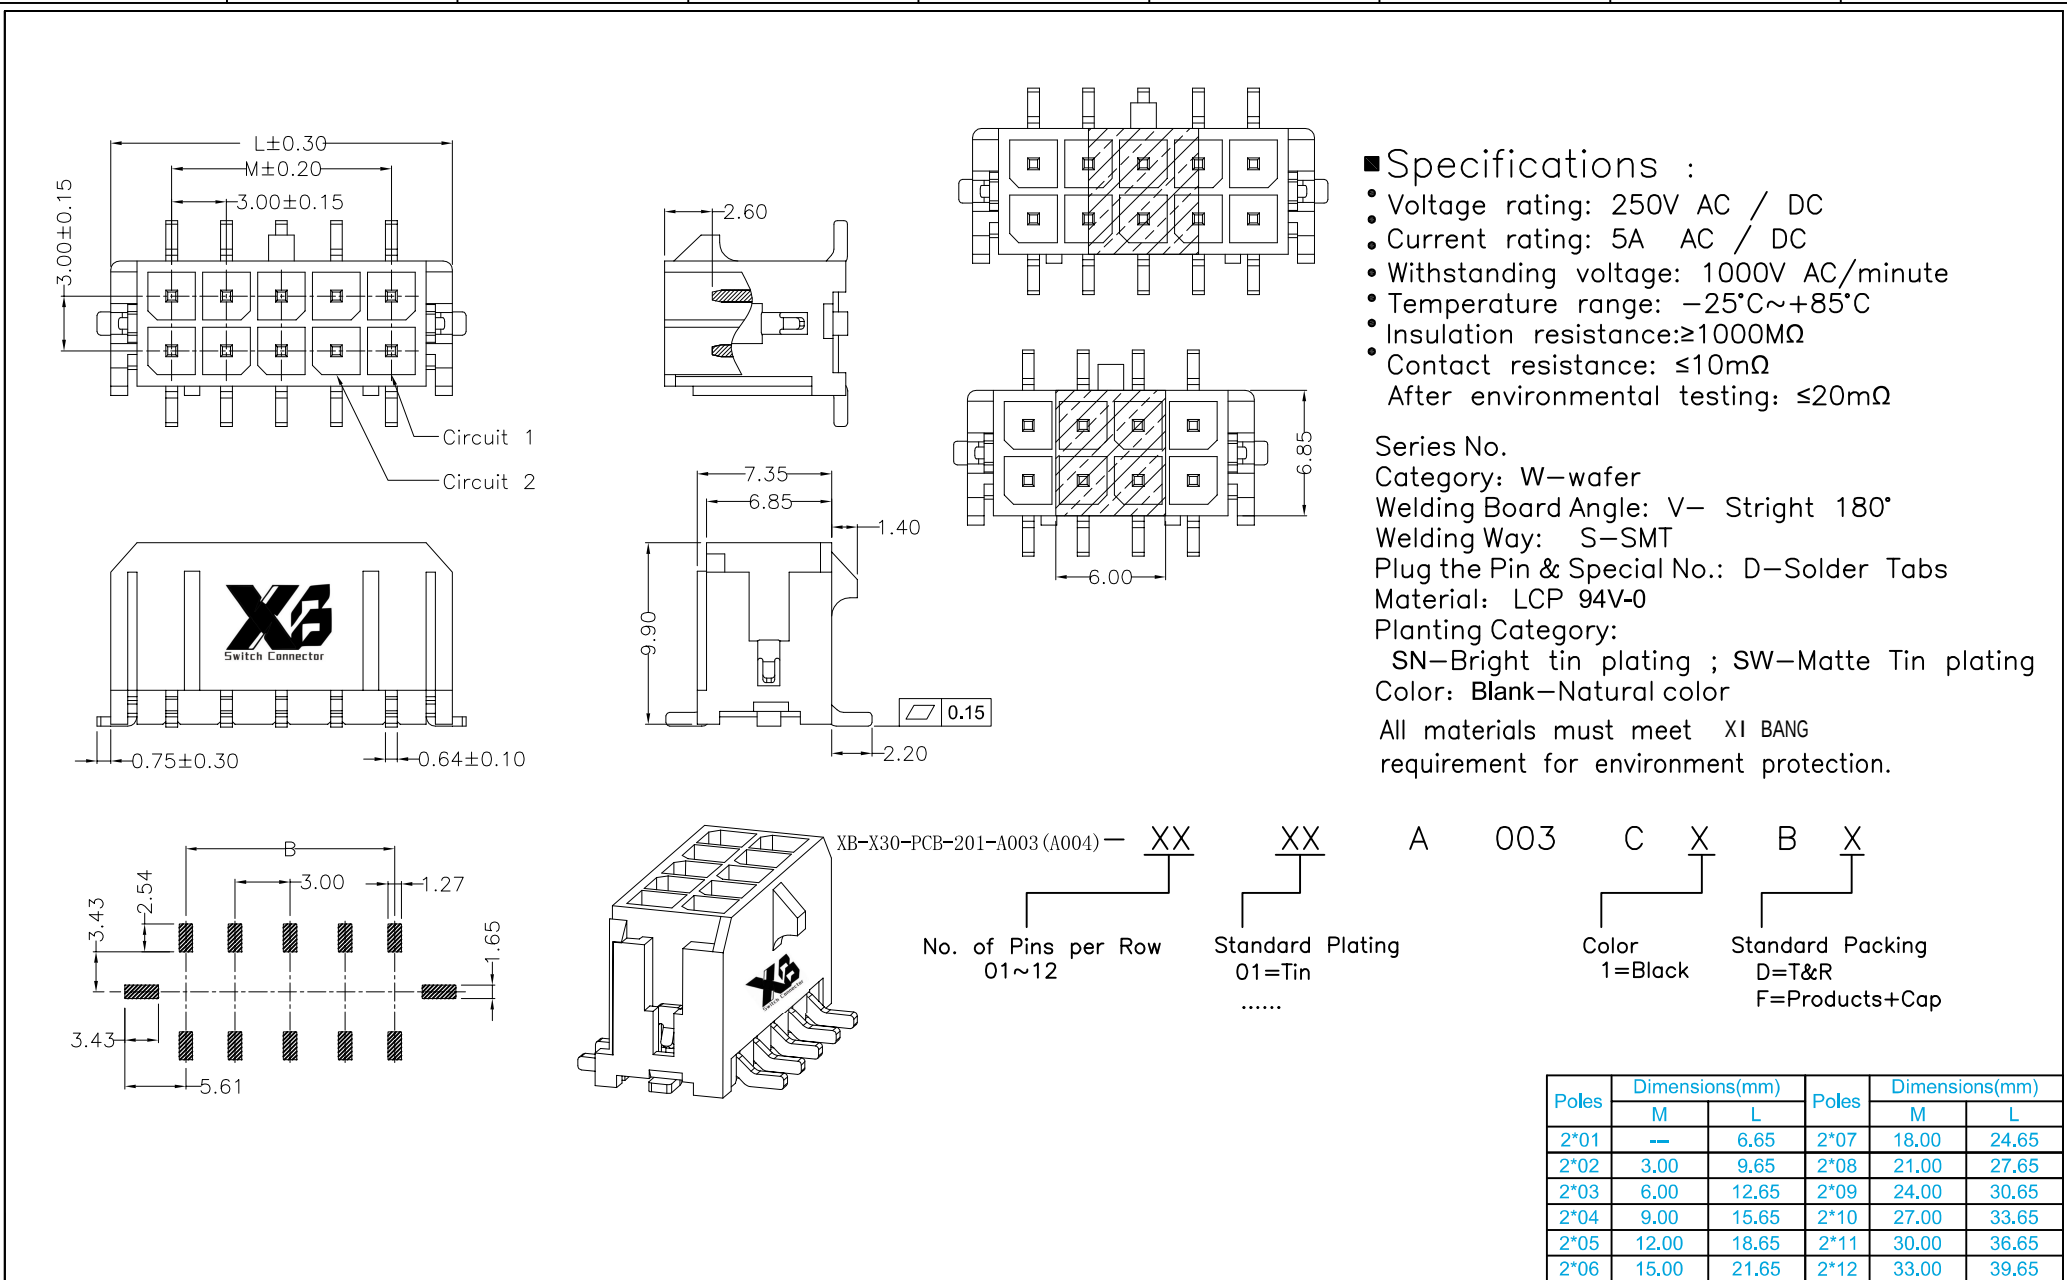

■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance:≥1000MΩ
- Contact resistance: ≤10mΩ
After environmental testing: ≤20mΩ





Series No.
Category: W-wafer
Welding Board Angle: V- Stright 180°
Welding Way: S-SMT
Plug the Pin & Special No.: D-Solder Tabs
Material: LCP 94V-0
Planting Category:
SN-Bright tin plating ; SW-Matte Tin plating
Color: Blank-Natural color
All materials must meet XI BANG
requirement for environment protection.

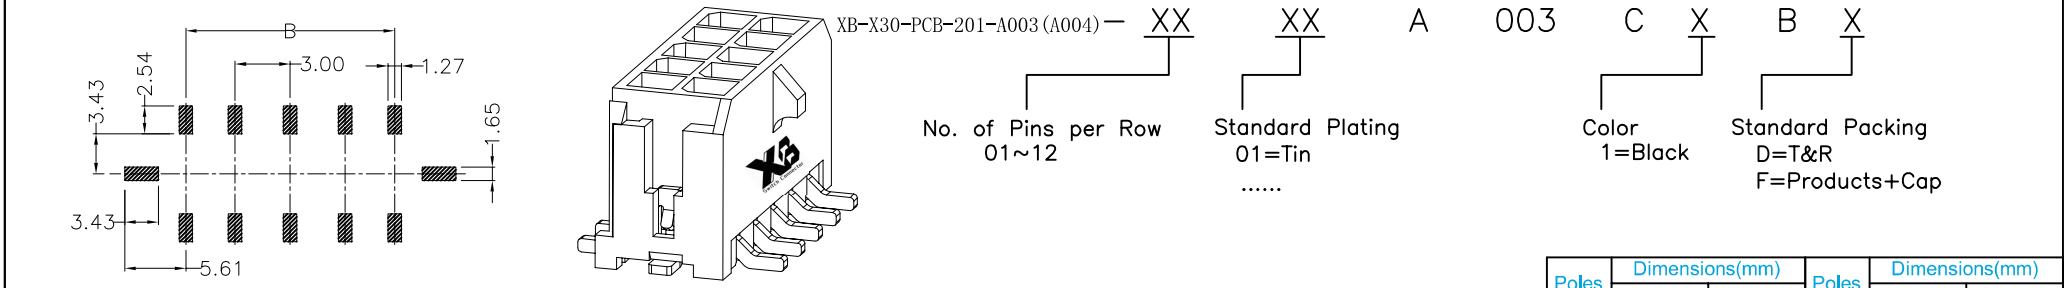


Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	M	L		M	L
2*01	---	6.65	2*07	18.00	24.65
2*02	3.00	9.65	2*08	21.00	27.65
2*03	6.00	12.65	2*09	24.00	30.65
2*04	9.00	15.65	2*10	27.00	33.65
2*05	12.00	18.65	2*11	30.00	36.65
2*06	15.00	21.65	2*12	33.00	39.65

 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD			GENERAL TOLERANCE		DESIGN:	DATE:	DWG. NO. XB-X30-PCB-201-A003 (A004) PART NO.	TITLE. Pitch 3.00 WAFER MALE DUAL ROWS SMT TYPE CONNECTOR
REV. A	UNIT. mm	SCALE. 2:1	PAGE. 1/1			CHECKED:	DATE:	
						AUDITED:	DATE:	

123456789

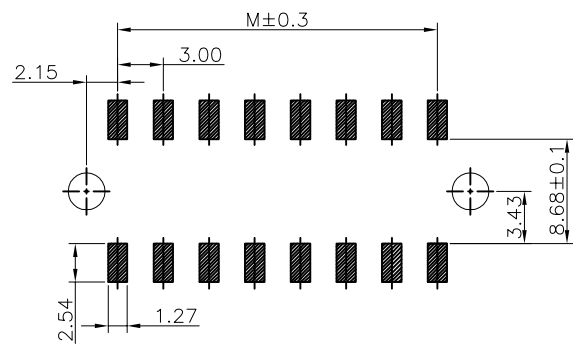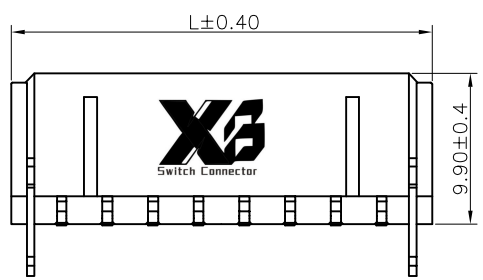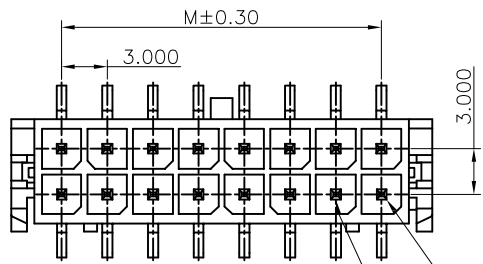

Recommended P.C.B Layout
General Tolerance±0.05

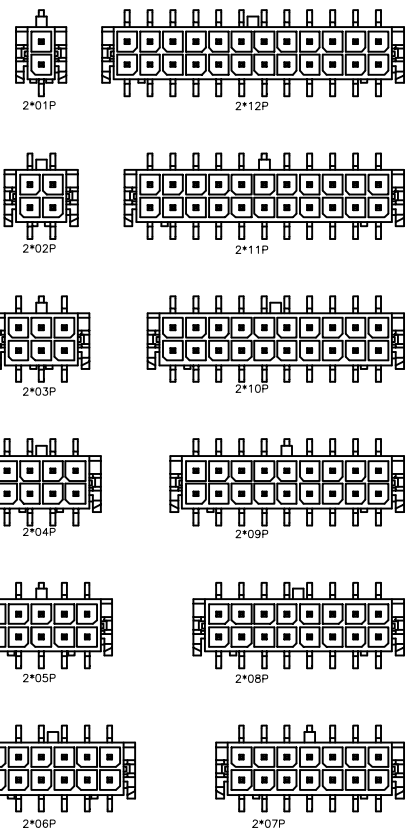


Specifications :
Voltage rating: 250V AC / DC
Current rating: 5A AC / DC
Withstanding voltage: 1000V AC/minute
Temperature range: -25°C~+85°C
Insulation resistance:≥1000MΩ
Contact resistance: ≤10mΩ
After environmental testing: ≤20mΩ

Material: LCP UL 94V-0
Material(PIN) :Brass

All materials must meet XI BANG
requirement for environment protection.

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	M	L		M	L
2*01	---	6.65	2*07	18.00	24.65
2*02	3.00	9.65	2*08	21.00	27.65
2*03	6.00	12.65	2*09	24.00	30.65
2*04	9.00	15.65	2*10	27.00	33.65
2*05	12.00	18.65	2*11	30.00	36.65
2*06	15.00	21.65	2*12	33.00	39.65

XB-X30-PCB-201-A003 (A004) - XX XX A 004 C X B X
No. of Pins per Row 01~12 Standard Plating 22=Matte Tin Selective Plating 01=Tin
Color 1=Black Standard Packing F=Cap+Tape&Reel

 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD			GENERAL TOLERANCE		DESIGN:	DATE:	DWG. NO. XB-X30-PCB-201-A003 (A004)	TITLE. 3.0 mm Crimp Style Connectors
			X.*±	X.±/	CHECKED:	DATE:		
REV. A	UNIT. mm	SCALE. 1:1	PAGE. 1/1		.XX*±	.XX±0.20	PART NO.	
					.XXX*±	.XXX±0.10		
					AUDITED:	DATE:		