
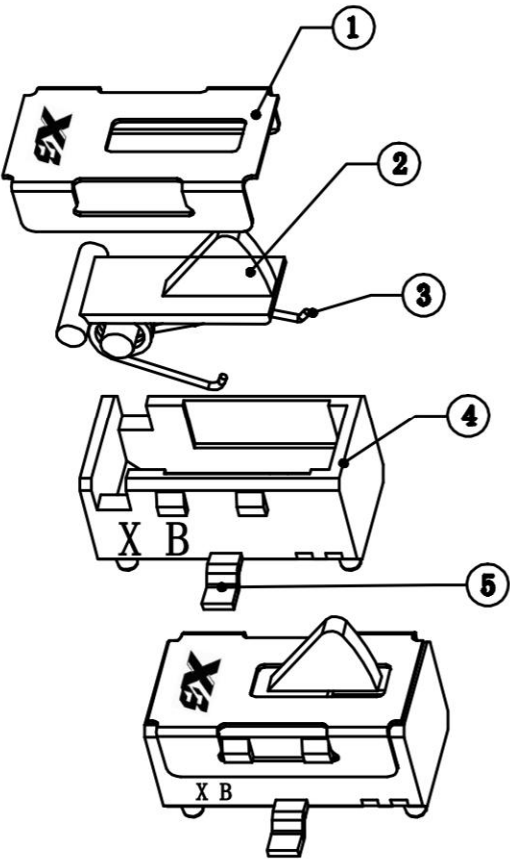


ROHS

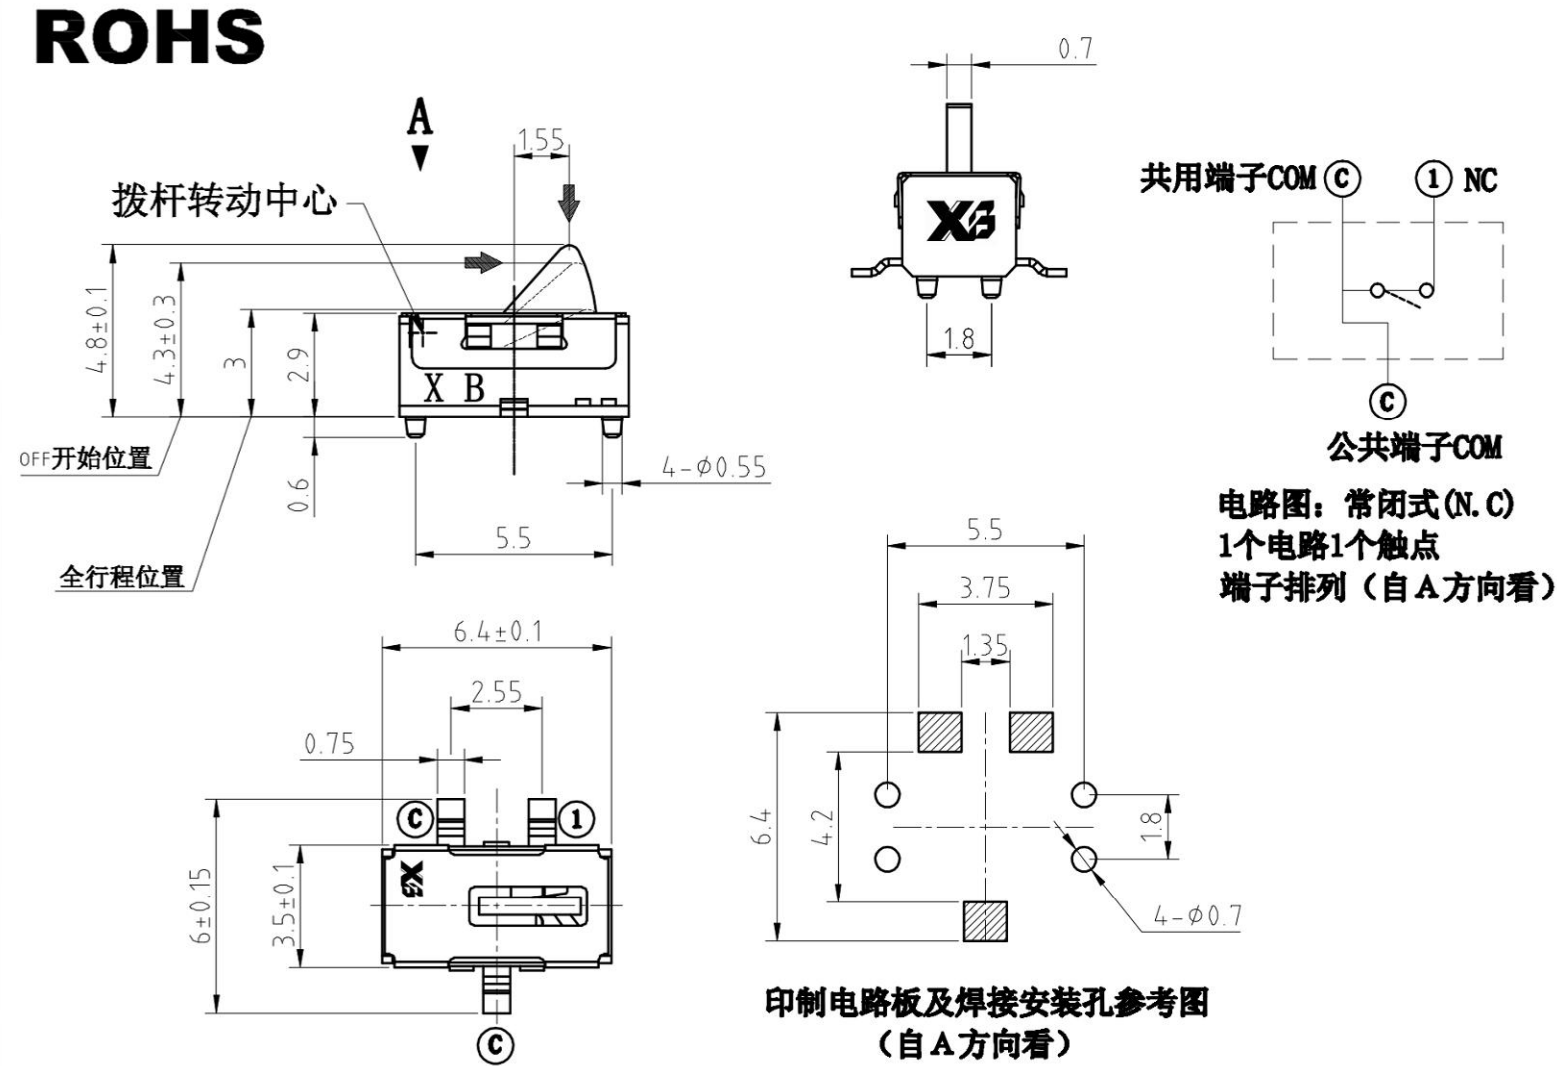

SPECIFICATION (INITIAL)				
RATING:				
CONTACT RESISTANCE: MAX 30mΩ				
INSULATION RESISTANCE: 500MΩ AT 500V DC				
WITHSTAND VOLTAGE: AC 250V FOR 1 MIN				
OPERATION FORCE: 30gf±10gf				
SWITCHING LIFE: 100000 Cycles (6-10c/m loading)				

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

 Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD					TITLE : XB DETECTION SWITCH											
					MODEL XB-TM-VT-07M-CB-D带柱（常闭型）单触点											
UNIT : MM		DWN.	GAO. PENG	DATE		TOLERANCE ≤1.5mm ± 0.1 > 1.5mm ± 0.2 ≥10.0mm ± 0.3	ANGLE TOL ± 2°	8	REEL	PS	1	BLUE				
SCALE : 5 : 1		CHK'D	PANG. DONG	DATE				7	CARRIER	PS	1	CLEAR				
VERSION		01	APPD.	HE. LONG. FEI	DATE				6	COVER TAPE	PS	1	CLEAR			
									5	CONTACT	PBS STRIP	1	Ag CLAD			
								4	COVER	IRON STRIP	1	Ni PLATED				
								3	CASE	NYLON	1	BLACK				
								2	TERMINAL	BRASS STRIP	2	Ag PLATED				
								1	KNOB	NYLON	1	BLACK				
								NO.	PART NAME	MATERIAL	QTY.	FINISHING				