

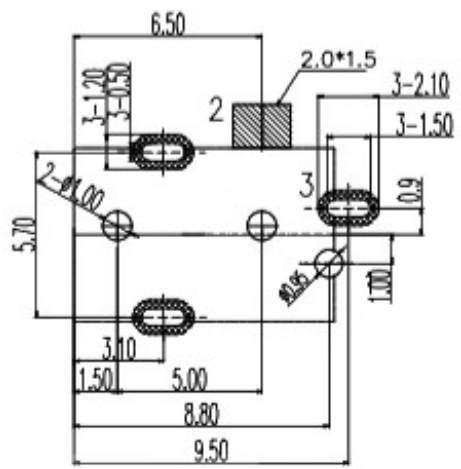



3D VIEW




PCB LAYOUT
TOP VIEW

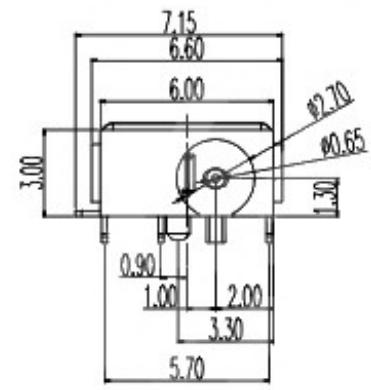


SCHEMATIC

NOTES:

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 1000Ω MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 29.4N (3.00Kgf) MAX.;
7. CONNECTOR UNMATING FORCES: 2.94N(0.30Kgf) MIN.;



(DC PLUG)



④	HOUSING	1	PPA		Black
④	CONTACT D	1	BRASS t=0.30	Ag-P1a tnd	
③	CONTACT C	1	BRASS t=0.20	Ag-P1a tnd	
③	CONTACT B	1	PHOSPHOR BRONZE t=0.20	Ag-P1a tnd	
①	CONTACT A	1	BRASS 2.1.3	Ag-P1a tnd	
ITEM	PART NAME	Q'TY	MATERIAL	DESCRIPTION	REMARK



东莞市溪榜电子有限公司

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		DC POWER JACK		DRAWING		Y.C,ZHANG		DWG.No.		SBICL	
PART NO.				CHECK		G.C.Chen		REV.		A1	
UNIT :	mm	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL		DATE			
			ABOVE 5 ~30	±0.3							
			ABOVE 30	±0.5	0±0.7	SCALE	2:1	PAGE	1 OF 1		