
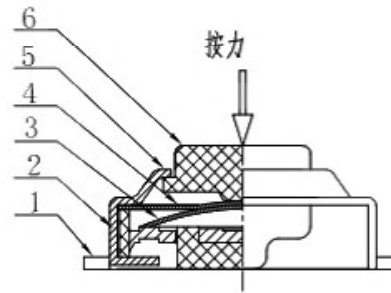


电路图

PCB 板焊盘尺寸

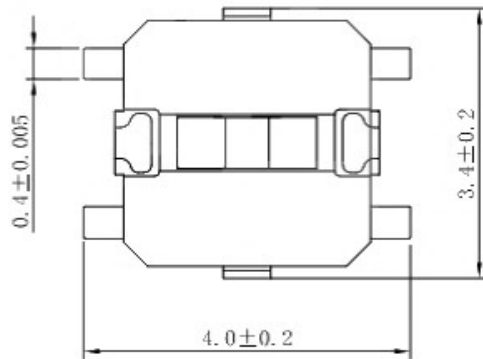

高度	PCS/盒
H=1.5mm	4000
H=1.6mm	4000
H=1.7mm	4000
H=2.0mm	4000
H=2.5mm	3000

NO.	NAME	MATERIAL	FINISHING
1	TERMINAL	phosphorous bronze	Silver plating
2	CASE	LCP	Black
3	CONTACT	SUS301	Silver plating
4	Waterproof membrane	P1	Yellow
5	COVER	SUS304	White
6	STEM	LCP	Black

SPECIFICATIONS				
Operating temperature ranges	-30° to +85°			
Rating	DC 12V 50mA Max.			
Contact Resistance	100mΩ Max			
Dielectric strength	250V AC for 1min.			
Travel	0.15±0.1mm			
Operating Force	1	2	3	4
	130±30gf	160±40gf	260±40gf	
Operating Life(cycles)	50,000	100,000	100,000	

DONG GUAN XI BANG ELECTRONIC CO., LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	SWITCH			DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.				CHECK	G.C.Chen	REV.	A1
UNIT :	TOLERANCE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE	
mm	OTHERWISE	ABOVE 5 ~30	±0.3	∠±5°	SCALE	PAGE	1 OF 1
		ABOVE 30	±0.5		2:1		
		ANGLE	±5°				