

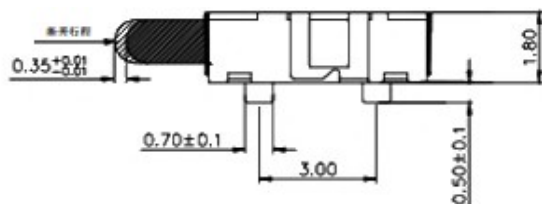


安装尺寸

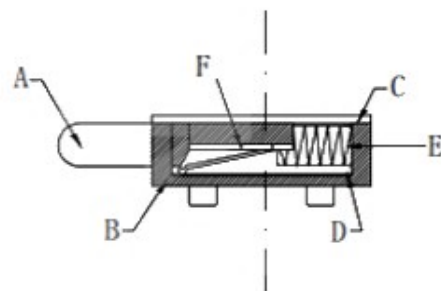

材料:

- A按钮: LCP(黑色)
- B底座: LCP(黑色)
- C盖子: 磷铜H62(镀银)
- D嵌件: 进口磷青铜(镀银与银白色)
- E弹簧: 不锈钢304(银白色)
- F簧片: 复银铜(银白色)

主要技术规格:

1. 额定值: 10mA DC12V
2. 接触电阻: $\leq 200m\Omega$
3. 操作力: $100gf \pm 50gf$
4. 行程: $0.45 \pm 0.15mm$
5. 绝缘电阻: $\geq 100M\Omega$
6. 耐压强度: AC100V 50Hz/1Min.
7. 寿命: 5万Cycles Min
8. 温度范围: $-10^{\circ}C$ TO $+60^{\circ}C$
9. 总行程: 0.45-2.0mm

DONG GUAN XI BANG ELECTRONIC CO., LTD

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		DETECTION SWITCH		DRAWING		Y.C.ZHANG		DWG.No.		SBICL	
PART NO.				CHECK		G.C.Chen		REV.		A1	
UNIT :		TOLERANCE		UP TO 5		±0.2		ANGLE		APPROVAL	
mm		OTHERWISE		ABOVE 5~30		±0.3		0°±5'		DATE	
				ABOVE 30		±0.5		SCALE		PAGE	
				ANGLE		±3'		2:1		1 OF 1	