

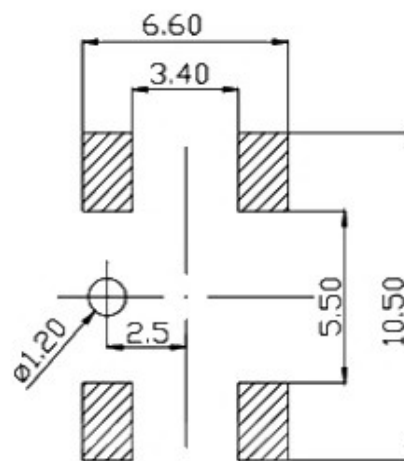
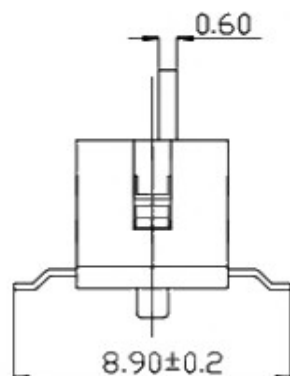
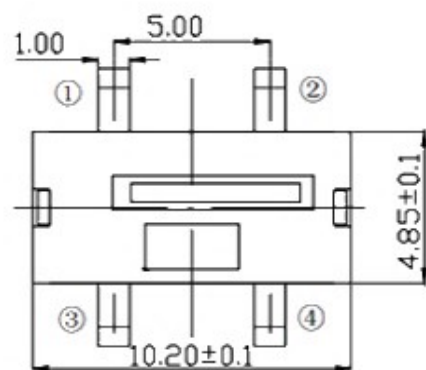



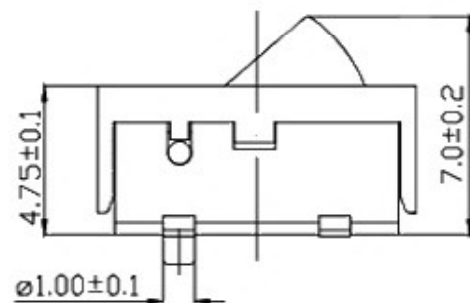

PCB.焊接尺寸图

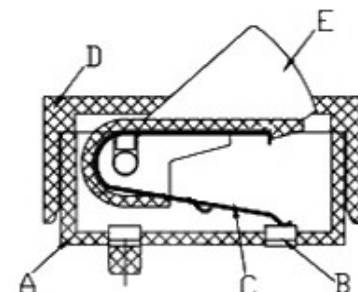

电气原理图

材料:

- A底座/基座: 进口LCP(黑色)
 B嵌件: 黄铜(镀银与银白色)
 C接触弹簧: 磷黄铜(镀银与银白色)
 D盖板: 进口增强尼龙(黑色)
 E按钮: 进口增强尼龙(黑色)

主要技术规格:

1. 额定值: 50mA DC12V
2. 接触电阻: $\leq 150\text{m}\Omega$
3. 操作力: $70\text{gf} \pm 40\text{gf}$
4. 行程: $0.5 \pm 0.3\text{mm}$
5. 绝缘电阻: $\geq 100\text{M}\Omega$
6. 耐压强度: AC250V 50Hz/1Min.
7. 寿命: 5万Cycles Min
8. 温度范围: -25°C TO $+70^\circ\text{C}$

DONG GUAN XI BANG ELECTRONIC CO., LTD

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		DETECTION SWITCH		DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.				CHECK	G.C.Chen	REV.	A1
UNIT : mm	TOLERANCE OTHERWISE	UP TO 5	± 0.2	APPROVAL		DATE	
		ABOVE 5 ~ 30	± 0.3				
		ABOVE 30	± 0.5	SCALE	2:1	PAGE	1 OF 1
		ANGLE	$\pm 5^\circ$				