

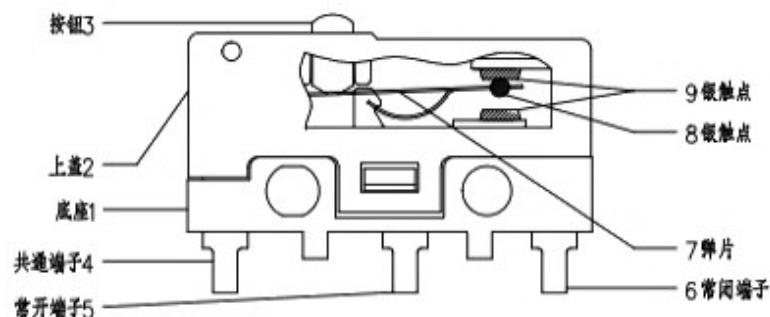

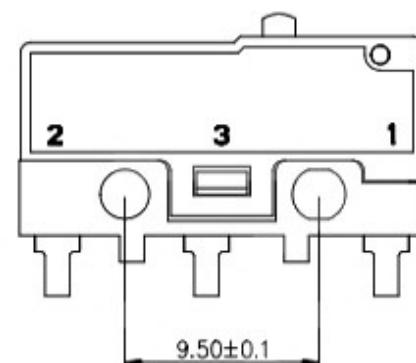
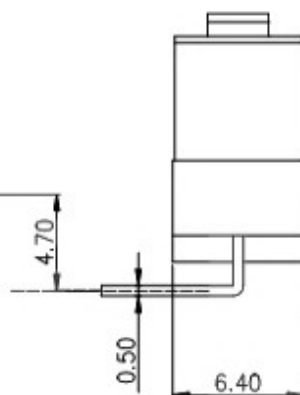
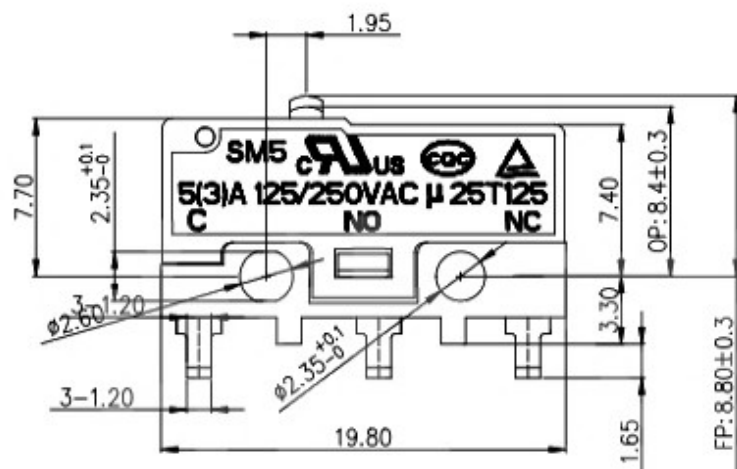


Rating	5 A 125/250VAC	Mechanical Life	1,000,000 cycles
Contact Resistance	100mΩ Max	Electrical Life	10,000 cycles
Insulation Resistance	>100MΩ DC500V	Ambient Temper. Used	-25℃ to +125℃
Withstand Voltage	AC1500V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	235±5℃ 5s	Operating Force	150 ±40gf

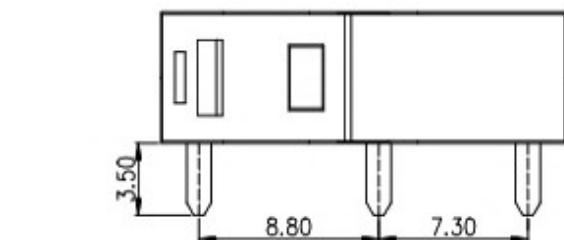

9	端子触点	2	银合金	
8	弹片触点	1	银合金	
7	弹片	1	C5210	
6	NC端子	1	C2680	镀锡
5	NO端子	1	C2680	镀锡
4	COM端子	1	C2680	镀锡
3	按钮	1	PBT	UL94V-0
2	上盖	1	PBT	UL94V-0
1	底座	1	PBT	UL94V-0
序号	零件名称	数量	材料	备注

制图 DRAWN		东莞市溪榜电子有限公司	比例 SCALE	4:1	标题 TITLE	中型微动开关
设计 DESIGN			图数 SHEET	1/1	图号 P/N NO.	
审核 CHECKED			单位 UNIT	mm	图人签字 P/N HO.	
批准 APPROVE			公差 TOLERANCE	±0.20 ±0.15 ±0.10 ±0.05	图数 SIZE	A4
工程 ENG DRAW			图数 SIZE	±2.0'	图数 SIZE	A4

REV.	ECO NO.	DATE	变更内容 DEFINITION	制图 DRAW	批准 APPROVE